
gnssrefl

Kristine M. Larson and GNSS-IR community

Oct 29, 2023

CONTENTS:

1	Installation	3
2	Understanding	7
3	Files, Formats, Frequencies	25
4	Quick Links to the Code	37
5	Use Cases	39
6	Community	41
7	2023 GNSS-IR Short Course	43
8	What is a good GNSS Reflections Site?	45
9	API documentation	49
	Python Module Index	189
	Index	191

Date: Oct 29, 2023

gnssrefl is an open source python-based software package for GNSS interferometric reflectometry (GNSS-IR).

INSTALLATION

You can access this package via Jupyter notebooks, Docker containers, or traditional github/pypi package installation.

1.1 Jupyter Notebooks

This link is dead. Please contact Kelly Enloe at Earthscope directly for current information on their status, enloe@earthscope.org

[Install Instructions](#)

1.2 Docker Container

[Install Instructions](#)

1.3 Local Python Install

YOU MUST BE RUNNING python version 3.9 or lower.

For installation with github/pypi, the setup requires a few system dependencies: gcc and gfortran. **If you are using linux** then simply type

```
apt-get install -y gcc
```

and

```
apt-get install -y gfortran
```

in your terminal (or yum install -y gcc-gfortran).

If you are using a MacOS then you will need to install xcode. First, in your terminal, check first to see if you already have it:

```
xcode-select -p
```

If it is installed, it should return a path. If it is not installed then run

```
xcode-select --install
```

This should install gcc. You can check if you have gcc by typing

```
gcc --version
```

You can check to see if you have gfortran by typing

`gfortran --version`

If you do not have `gfortran`, then you can use `homebrew` to install (`brew install gfortran`).

1.3.1 Environment Variables

You should define three environment variables:

- EXE = where various executables will live. These are mostly related to manipulating RINEX files.
- REFL_CODE = where the reflection code inputs (SNR files and instructions) and outputs (RH) will be stored (see below). Both `snr` files and results will be saved here in year subdirectories.
- ORBITS = where the GPS/GNSS orbits will be stored. They will be listed under directories by year and `sp3` or `nav` depending on the orbit format. If you prefer, `ORBITS` and `REFL_CODE` can be pointing to the same directory.

If you are running in a `bash` environment, you should save these environment variables in the `.bashrc` file that is run whenever you log on.

If you don't define these environment variables, the code *should* assume your local working directory (where you installed the code) is where you want everything to be (to be honest, I have not tested this in a while). The orbits, SNR files, and periodogram results are stored in directories in year, followed by type, i.e. `snr`, `results`, `sp3`, `nav`, and then by station name.

1.3.2 Direct Python Install

If you are using the version from `gitHub`:

- You may want to install the `python3-venv` package `apt-get install python3-venv`
- `apt-get install git`
- `git clone https://github.com/kristinemlarsen/gnssrefl`
- `cd` into that directory, set up a virtual environment, a la `python3 -m venv env`
- activate your virtual environment `source env/bin/activate`
- `pip install wheel` (we are working to remove this step)
- `pip install .`
- from what I understand, you should be able to use `pip3` instead of `pip`
- so please read below or type `install.exe -h`

1.3.3 PyPi Install

- make a directory, `cd` into that directory, set up a virtual environment, a la `python3 -m venv env`
- activate the virtual environment, `source env/bin/activate`
- `pip install wheel` (we are working to remove this step)
- `pip install gnssrefl`
- from what I understand, you should be able to use `pip3` instead of `pip`
- Please read below or type `install.exe -h`

1.3.4 Non-Python Code

installexe should download and install two key utilities used in the GNSS community: CRX2RNX and gfzrnrx. It currently works for linux, macos and mac-newchip options. If you are using docker or Jupyter notebooks **you do not need to run this**.

We no longer encourage people to use **teqc** as it is not supported by EarthScope/UNAVCO. We try to install it in case you would like to use it on old files.

1.3.5 Homework 0: Test installation.

For some of the shortcourses, we compiled a **Homework 0** that walks a new user through a few simple tests for validating successful gnssrefl installation.

UNDERSTANDING

2.1 Overview

gnssrefl is an open source/python version of my GNSS interferometric reflectometry (GNSS-IR) code.

If you would like to try out reflectometry without installing the code

I recommend you use [the GNSS-IR web app](#). It can show you representative results in less than 10 seconds. There are also some [examples](#).

2.2 Goals

The goal of the **gnssrefl** python repository is to help you compute (and evaluate) GNSS-based reflectometry parameters using geodetic data. This method is often called GNSS-IR, or GNSS Interferometric Reflectometry. There are three main modules:

- **rinex2snr** translates RINEX files into SNR files needed for analysis.
- **quickLook** gives you a quick (visual) assessment of SNR file without dealing with the details associated with **gnssir**. It is not meant to be used for routine analysis. It also helps you pick an appropriate azimuth mask and quality control settings.
- **gnssir** computes reflector heights (RH) from SNR files.


There are also various [utilities](#) you might find to be useful. If you are unsure about why various restrictions are being applied, it is really useful to read [Roesler and Larson \(2018\)](#) or similar. You can also watch some background videos on GNSS-IR at [youtube](#).

2.3 Philosophy


In geodesy, you don't really need to know much about what you are doing to calculate a reasonably precise position from GPS data. That's just the way it is. (Note: that is also thanks to the hard work of the geodesists that wrote the computer codes). For GPS/GNSS reflections, you need to know a little bit more - like what are you trying to do? Are you trying to measure water levels? Then you need to know where the water is! (with respect to your antenna, i.e. which azimuths are good and which are bad). Another application of this code is to measure snow accumulation. If you have a bunch of obstructions near your antenna, you are responsible for knowing not to use that region. If your antenna is 10 meters above the reflection area, and the software default only computes answers up to 6 meters, the code will not tell you anything useful. It is up to you to know what is best for the site and modify the inputs accordingly. I encourage you to get to know your site. If it belongs to you, look at photographs. If you can't find photographs, use Google Earth. You can also try using my [google maps web app interface](#).

2.4 Reflected Signal Geometry

To summarize, direct (blue) and reflected (red) GNSS signals interfere and create an interference pattern that can be observed in GNSS Signal to Noise Ratio (SNR) data as a satellite rises or sets. The frequency of this interference pattern is directly related to the height of the GNSS antenna phase center above the reflecting surface, or reflector height RH (purple). *The primary goal of this software is to measure RH.* This parameter is directly related to changes in snow height and water levels below a GNSS antenna. This is why GNSS-IR can be used as a snow sensor and tide gauge. GNSS-IR can also be used to measure soil moisture, but the code to estimate soil moisture is not as strongly related to RH as snow and water.

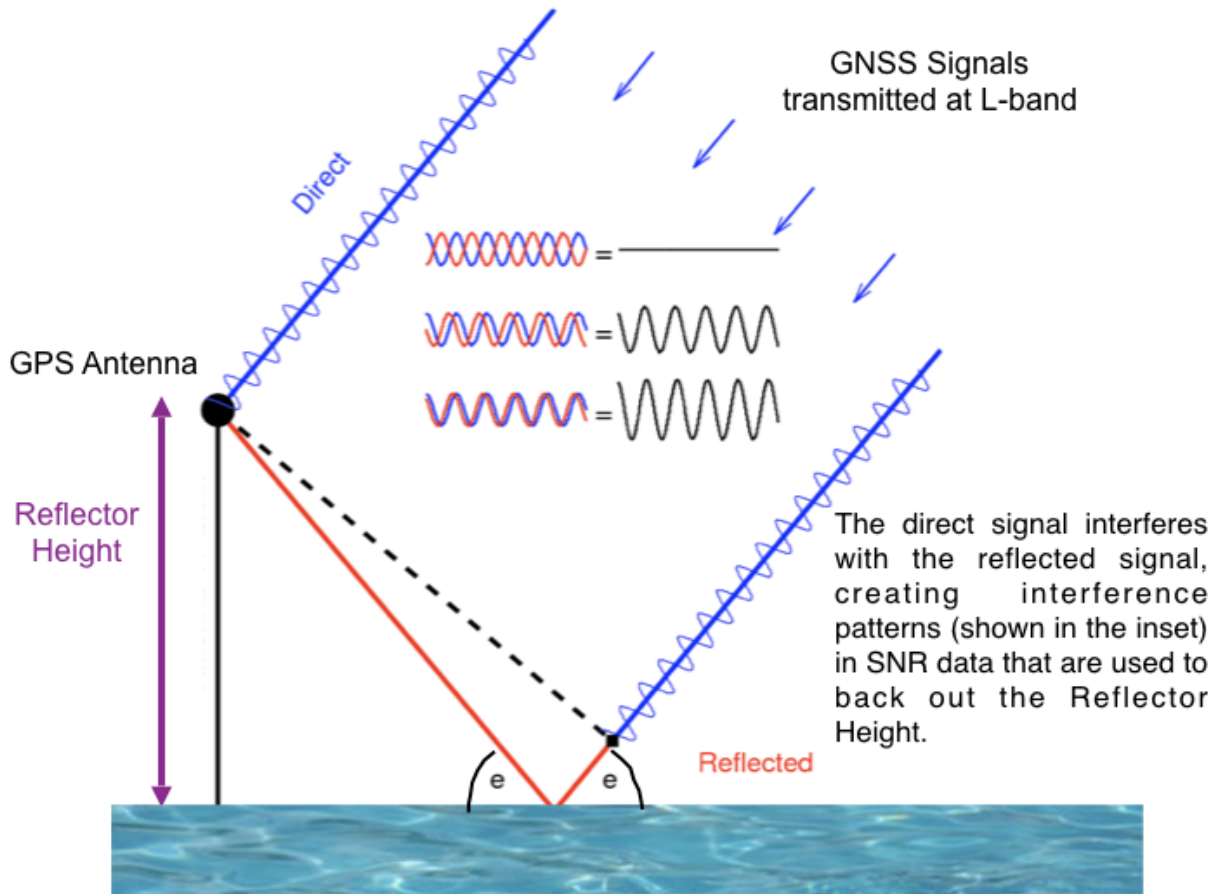


This code is meant to be used with Signal to Noise Ratio (SNR) data. This is a SNR sample for a site in the northern hemisphere (Colorado) and a single GPS satellite. The SNR data are plotted with respect to time - however, we have also highlighted in red the data where elevation angles are less than 25 degrees. These are the data used in GNSS Interferometric Reflectometry GNSS-IR. You can also see that there is an overall smooth polynomial signature in the SNR data. This represents the dual effects of the satellite power transmission level and the antenna gain pattern. We aren't interested in that so we will be removing it with a low order polynomial (and we will convert to linear units on y-axis). After the direct signal polynomial is removed, we will concentrate on the *rising* and *setting* satellite arcs. These are shown in red.

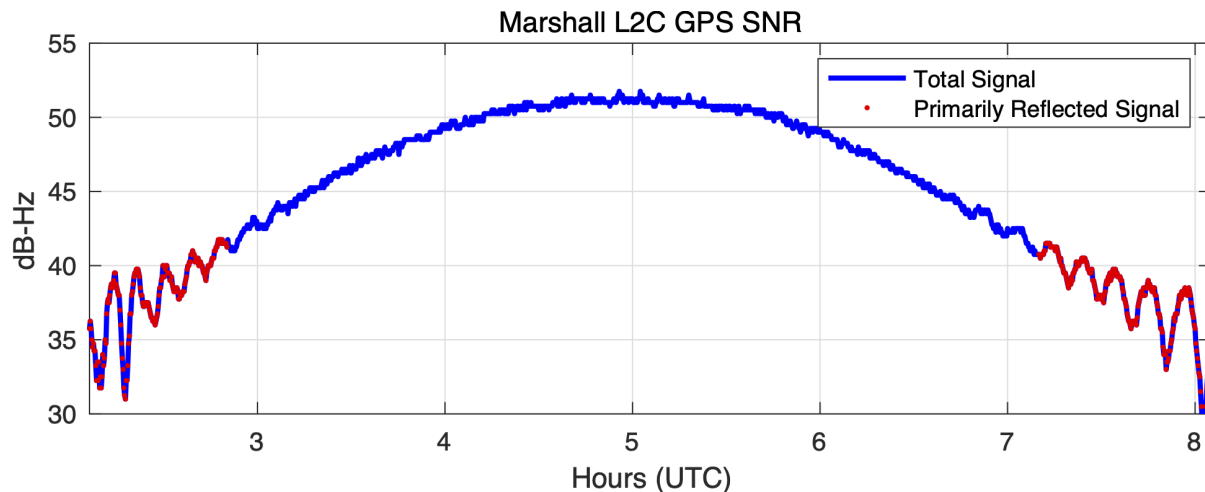

For a more dynamic example, look at these SNR data from Kachemak Bay

Once the direct signal is removed (and units changed), you will have a dataset as shown below. The x-axis is now in sine(elevation angle) instead of time, as this is the easiest way to analyze the spectral characteristics of the data. Below the SNR data is the periodogram associated with it. This periodogram is what allows us to estimate the reflector height of the antenna.

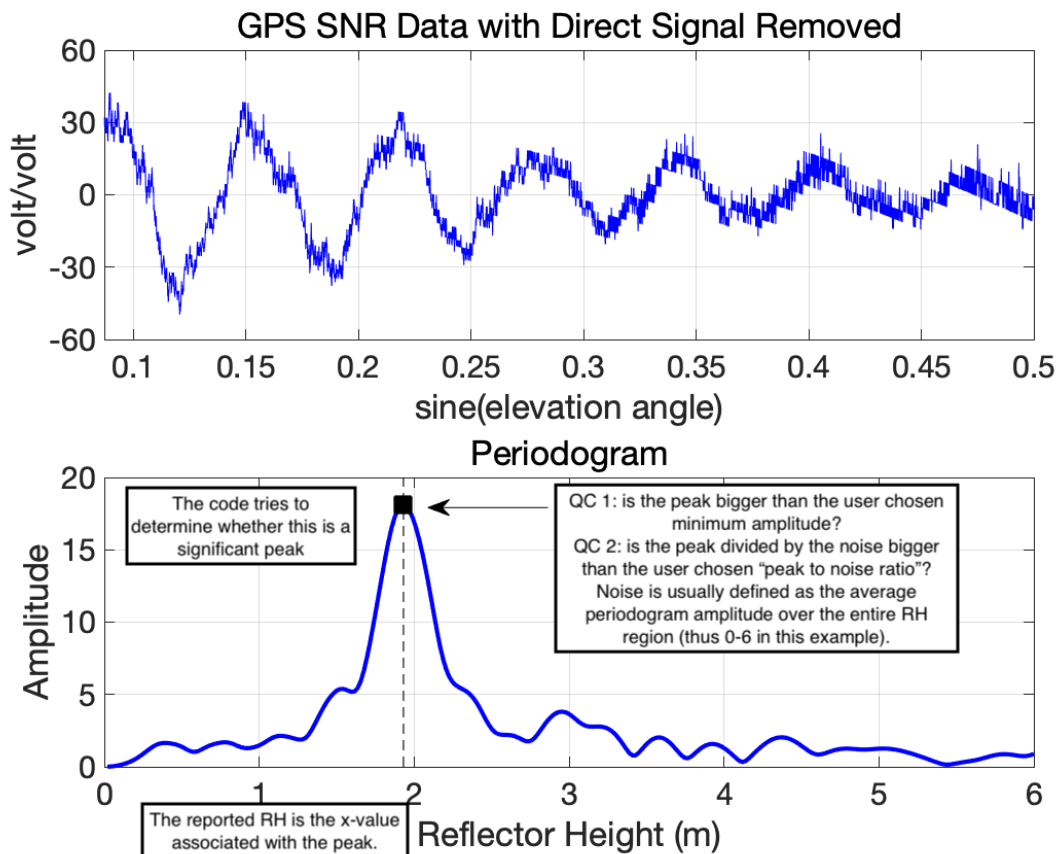

In a nutshell, that is what this code does - it tries to find the rising and setting arcs for all GNSS satellites in a datafile, computes periodograms to find the dominant frequencies which can be related to reflector heights, and ultimately defines environmental characteristics from them.

There are three big issues :

1. You need to make sure that dominant frequency is meaningful (**Quality Control**).
2. You need to make sure that the reflected signals are actually coming from where you want them (**Reflection Zones**)
3. Your receiver must be collecting data at sufficient rate so that your GNSS-IR results are not violating the Nyquist frequency (**Maximum Resolvable Reflector Height**).

2.5 Quality Control

This code uses a Lomb Scargle periodogram. This type of periodogram allows the input data to be sampled at uneven periods. The primary inputs are

- how precise (in reflector height units) do you want the periodogram calculated at?
- how far (in reflector height units) do you want the periodogram calculated for?

In other words, how densely sampled on the x-axis will your periodogram be and how far along the x-axis will it be? The first parameter should not set to something that makes no sense (i.e. so small the code takes forever to run). In this code the second parameter is the max reflector height (h2). The minimum reflector height is always zero, and then the values lower than the minimum reflector height (h1) are thrown out.


It is easy to compute a periodogram and pick the maximum value so as to find the reflector height. It is more difficult to determine whether it is one you should trust.



- is the peak larger than a user-defined value (amplitude of the dominant peak in your periodogram)
- is the peak divided by a “noise” metric larger than a user-defined value. This noise metric is defined over a user defined reflector height region. (peak2noise).
- is the data arc sufficiently “long” (ediff)

The amplitude and peak2noise ratio are influenced by choices you make, i.e. the elevation angle limits and the noise region used to compute peak2 noise. And they are also influenced by the kind of experiment you do and receiver you use.

Some examples follow:

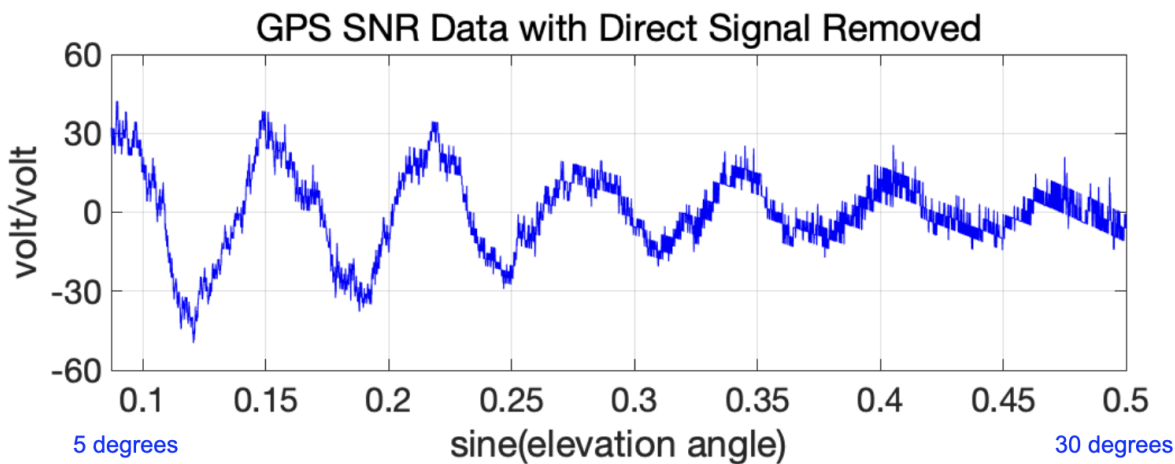Here we show a SNR series - outlining two different elevation angle regions in colors.




A spectral peak computed for
 this region will be smaller
 than the spectral peak using
 this region

Kristine M. Larson, 2023 GNSS-IR Short Course


We should expect that the periodograms will look different for these two regions and they are. The peak amplitudes are larger when you only use the lower elevation angle data. But the periodograms are wider (why?).

Example periodograms for SNR data

Using elevation angles 5-25 degrees

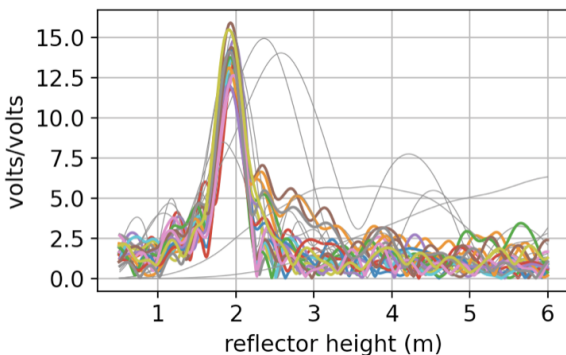


Using elevation angles 5-15 degrees

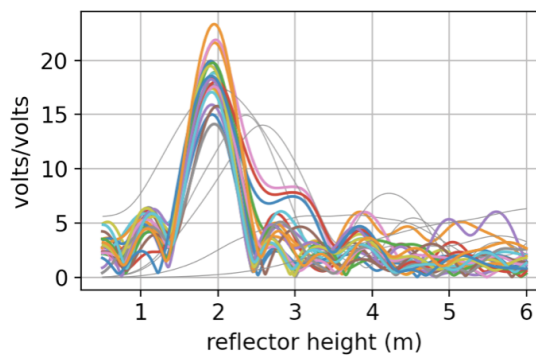


Peak2noise depends on the noise region. In quickLook it uses the same RH limits for noise as for computing the periodogram. You can easily see that if you said you wanted all H values below 20 meters, the noise region is much much larger, which means the peak value divided by the noise values will be much much bigger.

Peak to Noise Ratio

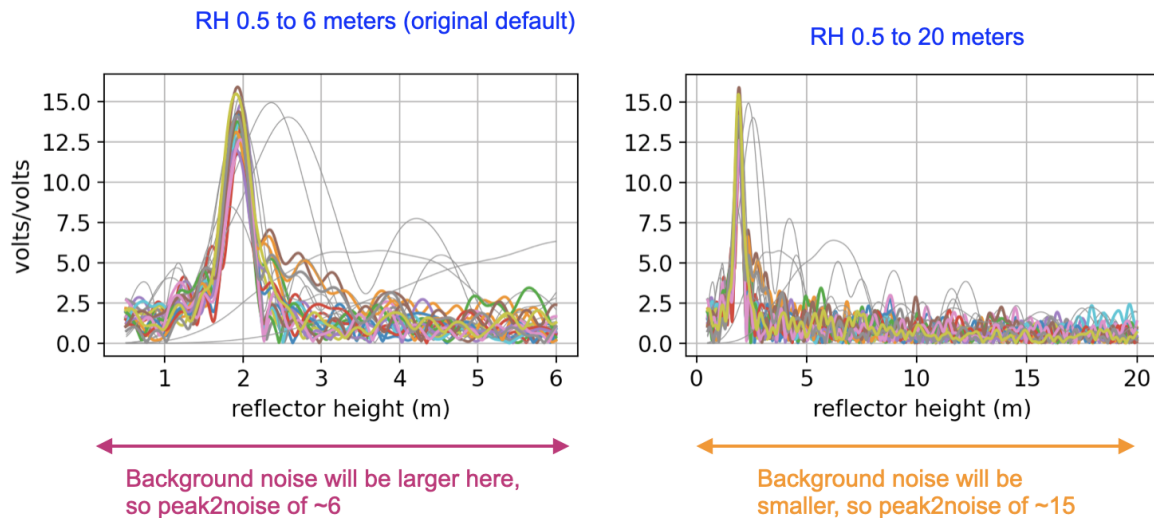


This is an example where two different stations with different surfaces are shown. The peak amplitudes of the periodograms are different. This simply means that the ice has a different dielectric constant than soil. You can verify this using the Nievinski simulator.

Peak amplitudes depend on the surface

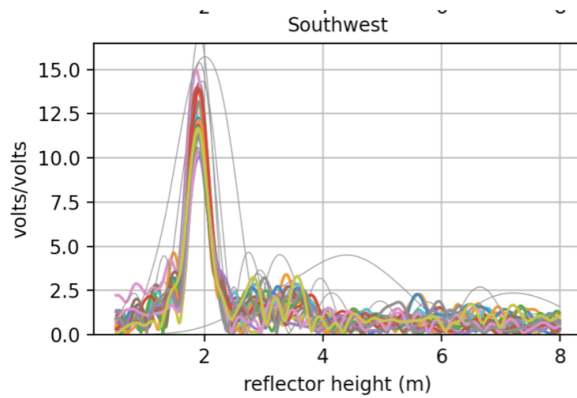

here the x-axis tells you the reflector height value is ~1.9 meters.
The different colors are different satellites

PBO H2O site - bare soil


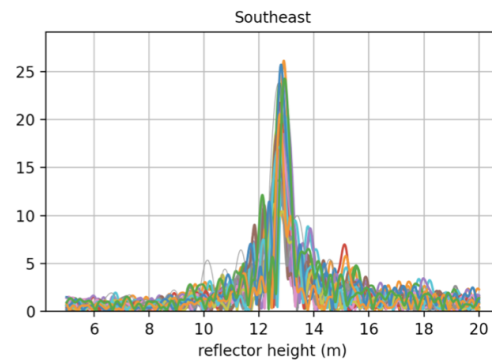


in this case the antenna is 13 meters
above the Greenland ice sheet

ice sheet

Here is an example where the same station is used in both periodograms - but the surface itself changed.

How is September in northern Greenland different than January?

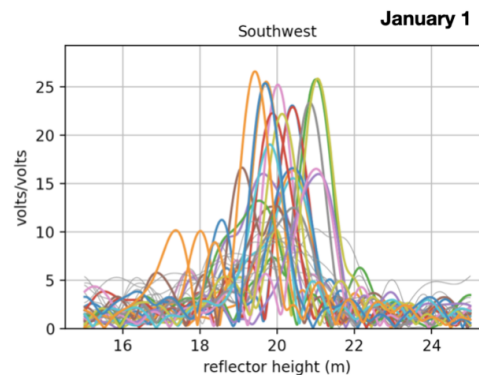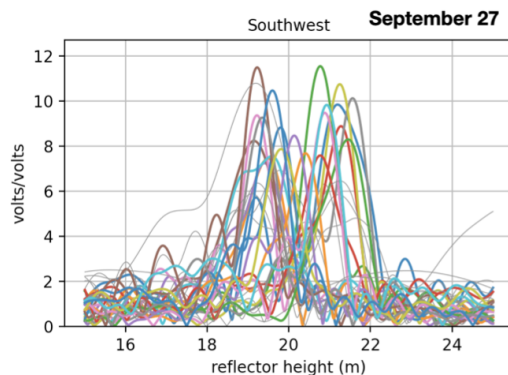

These are for a site that measures water reflections in Thule Greenland. Why are the peaks at different x-axis values?

In addition to amplitude and peak2noise, the code uses a quality control parameter called **ediff**. to test whether the data arc is sufficiently “long” in an elevation angle sense. ediff has units of degrees. If you set your desired elevation angle limits to 5 and 20 degrees, and ediff was 2, which is the default, then the code will require all arcs to track from at least 7 degrees and go up to 18 degrees. If you had a very short elevation angle range, i.e. 5-10 degrees, you might want to make that a little stricter, minimum of 6 and at least go up to 9 degrees, so an ediff of 1. If you don’t want to enforce this, just set it to something big. But you can’t turn off all quality control. Since the amplitude can be influenced by the kind of receiver you are using, if you aren’t sure what a good value would be, you can set that to zero. And you can use quickLook to get an idea of what it should be.

One more warning: if you tell the code that you want to use elevation angles of 5 to 25 degrees and it turns out that your receiver was using an elevation mask of 10 degrees, you will almost certainly end up with no useful results. Why? Because the best you will do is have a min elevation angle of 10 degrees, and the code will expect them to start at 7 degrees (i.e. $5 + 2$). Some cryosphere community members use 7 degree masks on their receivers for no reason that I can understand - so that situation would also end up with a lot of arcs thrown out.

Another way of thinking about how long an arc is measured in time units. The parameter is called `delTmax` in the code and is defined in minutes. The default is very long - 75 minutes - as this code is meant to be useable for soil moisture, snow, and tides. This will get you into trouble if you are measuring tides and the tide rates of change are large. In those cases, you might wish to reduce `delTmax`. See [Grauerort](#) for an example of this problem.


Even though we analyze the data as a function of sine of elevation angle, each satellite arc is associated with a specific time period. The code keeps track of that and reports it in the final answers. Each track is associated with an azimuth. In the initial versions of the code this was the average azimuth for all the data in your track. From version 1.4.5 and on, it is the azimuth of the lowest elevation angle in your arc.

2.6 Reflection Zones

What do these satellite reflection zones look like? Below are photographs and [reflection zone maps](#) for two standard GNSS-IR sites, one in the northern hemisphere and one in the southern hemisphere.


Mitchell, Queensland, Australia



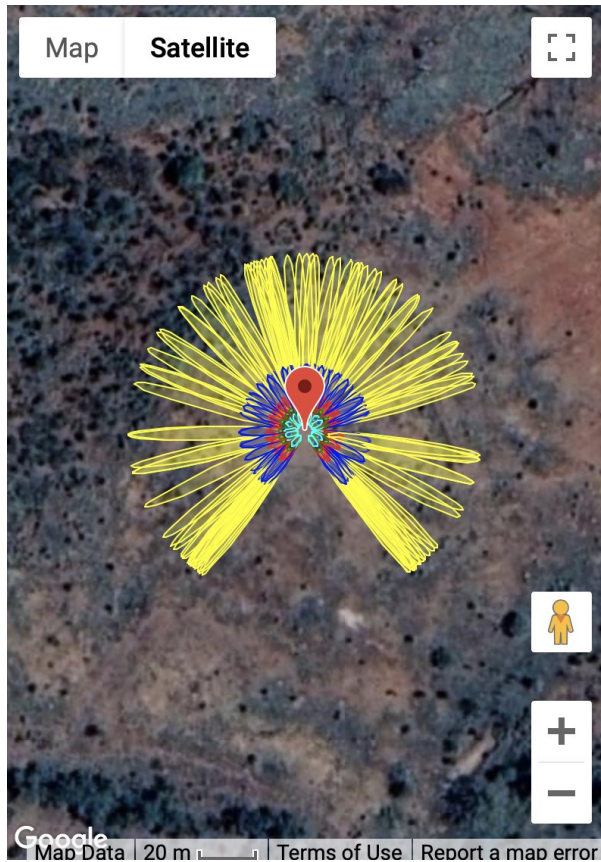


Portales, New Mexico, USA



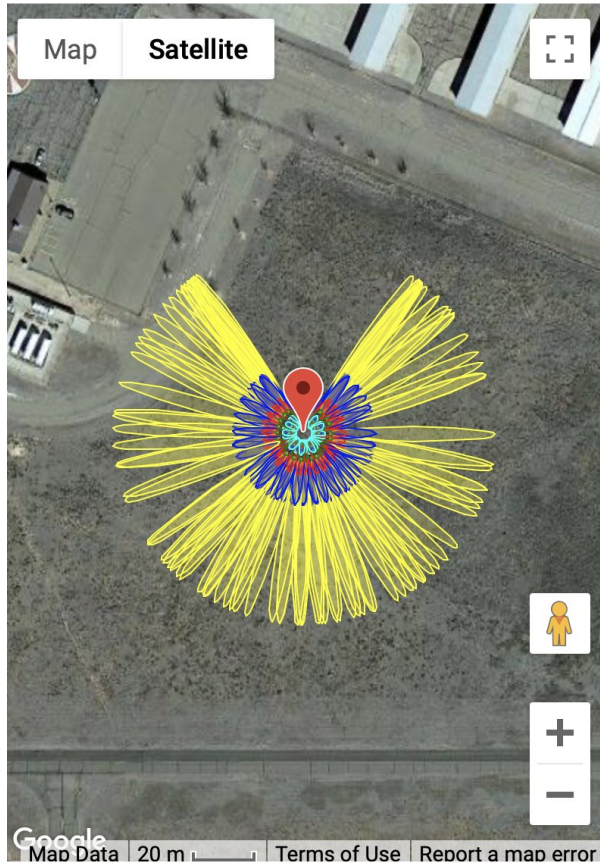

Each one of the yellow/blue/red/green/cyan clusters represents the reflection zone for a single rising or setting GPS satellite arc. The colors represent different elevation angles - so yellow is lowest (5 degrees), blue (10 degrees) and so on. The missing satellite signals in the north (for Portales New Mexico) and south (for Mitchell, Australia) are the result of the GPS satellite inclination angle and the station latitudes. The length of the ellipses depends on the height of the antenna above the surface - so a height of 2 meters gives an ellipse that is smaller than one that is 10 meters. In this case we used 2 meters for both sites - and these are pretty simple GNSS-IR sites. The surfaces below the GPS antennas are fairly smooth soil and that will generate coherent reflections. In general, you can use all azimuths at these sites.

Now let's look at a more complex case, station ross on Lake Superior. Here the goal is to measure water level. The map image (panel A) makes it clear that unlike Mitchell and Portales, we cannot use all azimuths to measure the lake. To understand our reflection zones, we need to know the approximate lake level. That is a bit tricky to know, but the photograph (panel B) suggests it is more than the 2 meters we used at Portales - but not too tall. We will try 4 meters and then check later to make sure that was a good assumption.

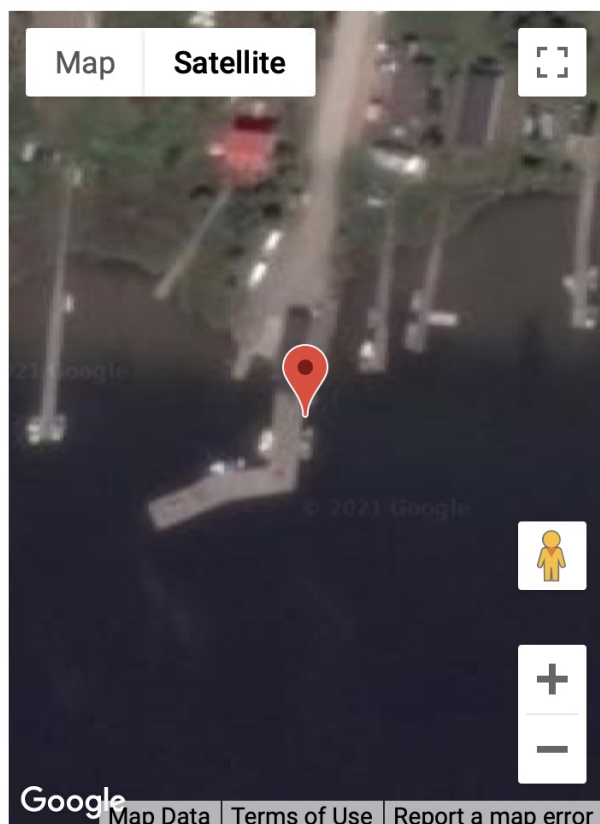

A. Google Map of station ROSS



B. Photograph of station ROSS



C. Reflection zones for GPS satellites at elevation angles of 5-25 degrees for a reflector height of 4 meters.



D. Reflection zones for GPS satellites at elevation angles of 5-15 degrees for a reflector height of 4 meters.

Again using the reflection zone web app, we can plot up the appropriate reflection zones for various options. Since

ross has been around a long time, <http://gnss-reflections.org> has its coordinates in a database. You can just plug in ross for the station name and leave latitude/longitude/height blank. You *do* need to plug in a RH of 4 since mean sea level would not be an appropriate reflector height value for this case.

Start out with an azimuth range of 90 to 180 degrees. Using 5-25 degree elevation angles (panel C) looks like it won't quite work - and going all the way to 180 degrees in azimuth also looks it will be problematic. Panel D shows a smaller elevation angle range (5-15) and cuts off azimuths at 160. These choices appear to be better than those from Panel C. It is also worth noting that the GPS antenna has been attached to a pier - and *boats dock at piers*. You might very well see outliers at this site when a boat is docked at the pier.

Note: we now have a [refl_zones](#) tool in the gnssrefl package.

Once you have the code set up, it is important that you check the quality of data. This will also allow you to check on your assumptions, such as the appropriate azimuth and elevation angle mask and reflector height range. This is the main reason quickLook was developed.

2.7 Maximum Resolvable Reflector Height

The “Nyquist” is complicated for GNSS-IR for various reasons - one being the units are not the same as the units of what we care about, the Reflector Height. So I am going to call it the Maximum Resolvable Reflector Height, which is a mouthfull, but at least you have some idea what it means.

If you are interested in the details of this calculation, please see the [Roesler and Larson paper](#). If you want to compute it for your site, please use [max_resolve_RH](#). That's all I am going to say on the matter.

2.8 quickLook

quickLook is meant to provide the user with a visual sense of the data at a given site. It has stored defaults that work for stations with reflectors that are lower than 8 meters. [You can change those defaults on the command line](#).

Example from Boulder

```
quickLook p041 2020 132
```


That command will produce this periodogram summary :

GNSS-IR: P041 Freq:GPS L1 Year/DOY:2020,132 elev: 5-25



By default, these are L1 data only. Note that the x-axis does not go beyond 8 meters. This is because we have used the defaults. Furthermore, note that results on the x-axis begin at 0.5 meters. Since you are not able to resolve very small reflector heights with this method, this region is not allowed. These periodograms give you a sense of whether there is a planar reflector below your antenna. The fact that the peaks in the periodograms bunch up around 2 meters means that at this site the antenna phase center is ~ 2 meters above the ground. The colors represent different satellites. If the data are plotted in gray that means you have a failed reflection. The quadrants are Northwest, Northeast and so on.

quickLook also provides a summary of various quality control metrics:

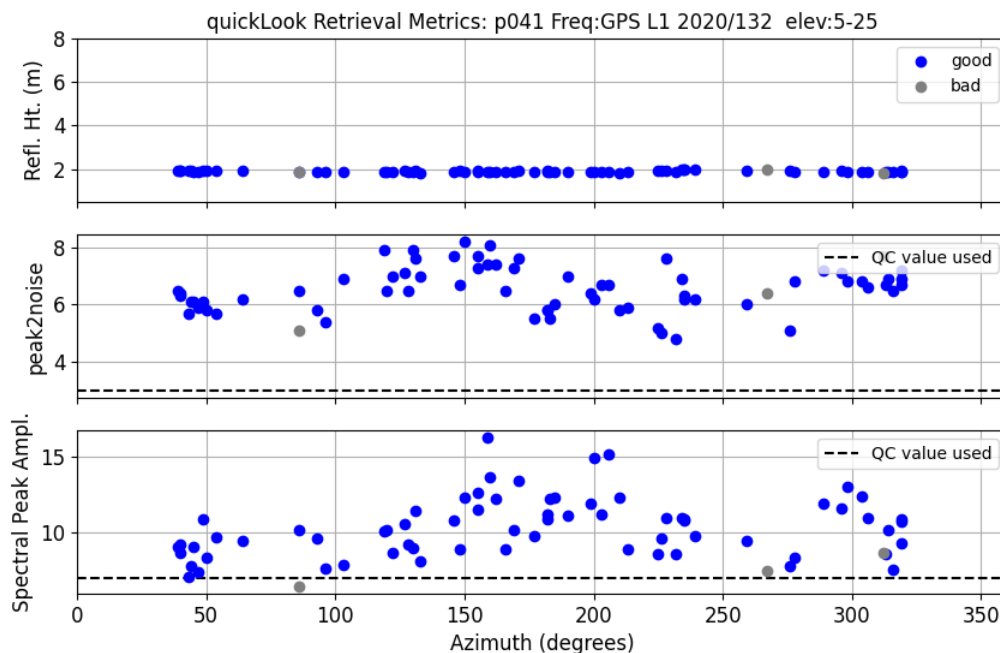


The top plot shows the successful RH retrievals in blue and unsuccessful RH retrievals in gray. In the center panel are the peak to noise ratios. The last plot is the amplitude of the spectral peak. The dashed lines show you what QC metrics quickLook was using. You can control/change these on the command line.

If you want to look at L2C data you just change the frequency on the command line. L2C is designated by frequency 20:

```
quickLook p041 2020 132 -fr 20
```


GNSS-IR: P041 Freq:GPS L2C Year/DOY:2020,132 elev: 5-25

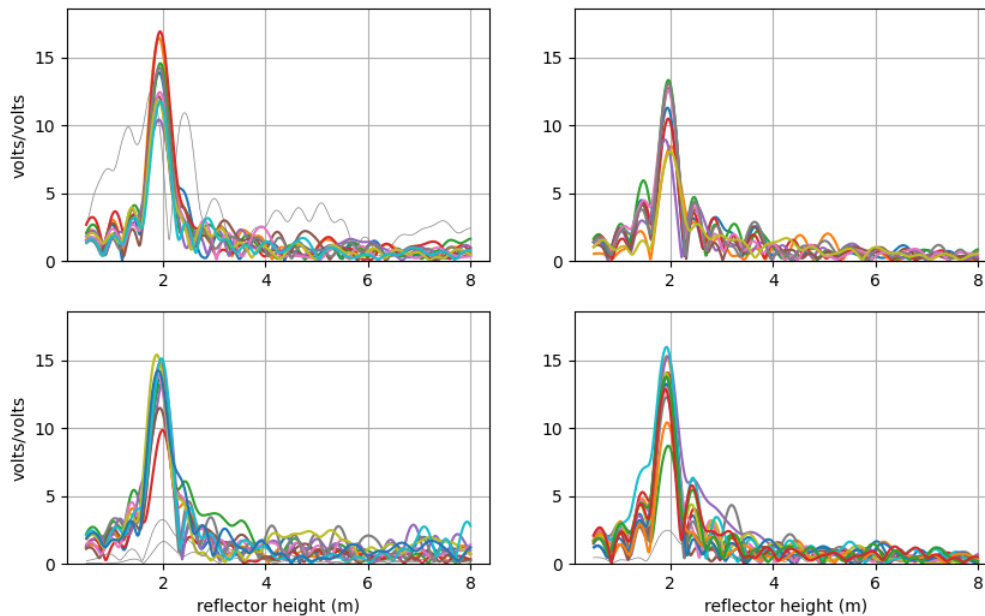

L2C results are always superior to L1 results. They are also superior to L2P data. If you have any influence over a GNSS site, please ask the station operators to track modern GPS signals such as L2C and L5 **and** to include it in the archived RINEX file.


Example for Lake Superior

```
quickLook ross 2020 170 -e1 5 -e2 15
```

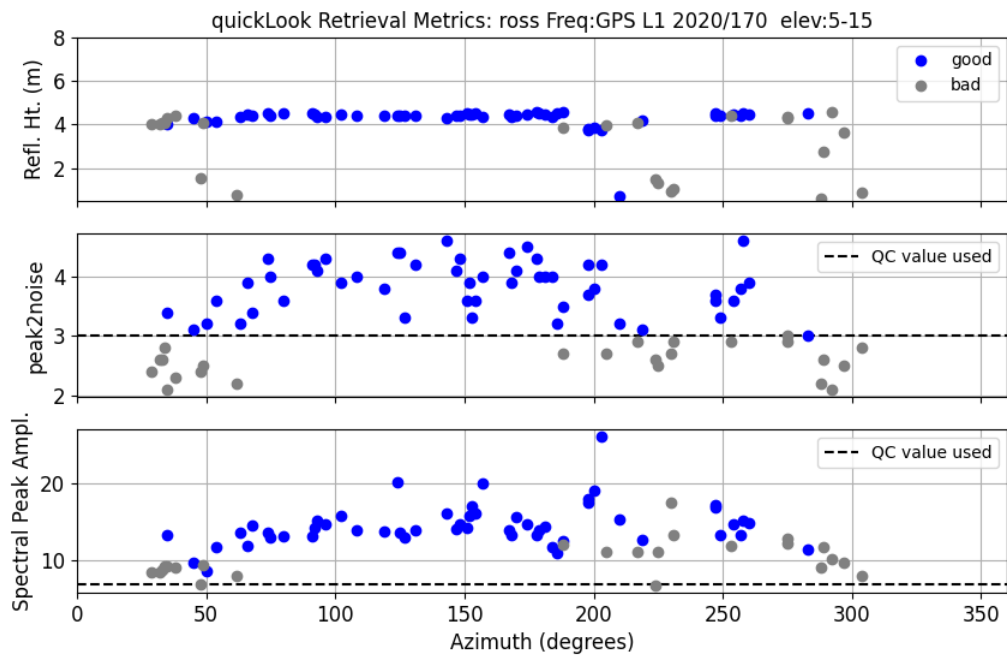

The good RH estimates (in blue in the top panel) are telling us that we were right when we assessed reflection zones using 4 meters. We can also see that the best retrievals are in the southeast quadrant (azimuths 90-180 degrees). This is further emphasized in the next panel, that shows the actual periodograms.

GNSS-IR: ROSS Freq:GPS L1 Year/DOY:2020,170 elev: 5-15

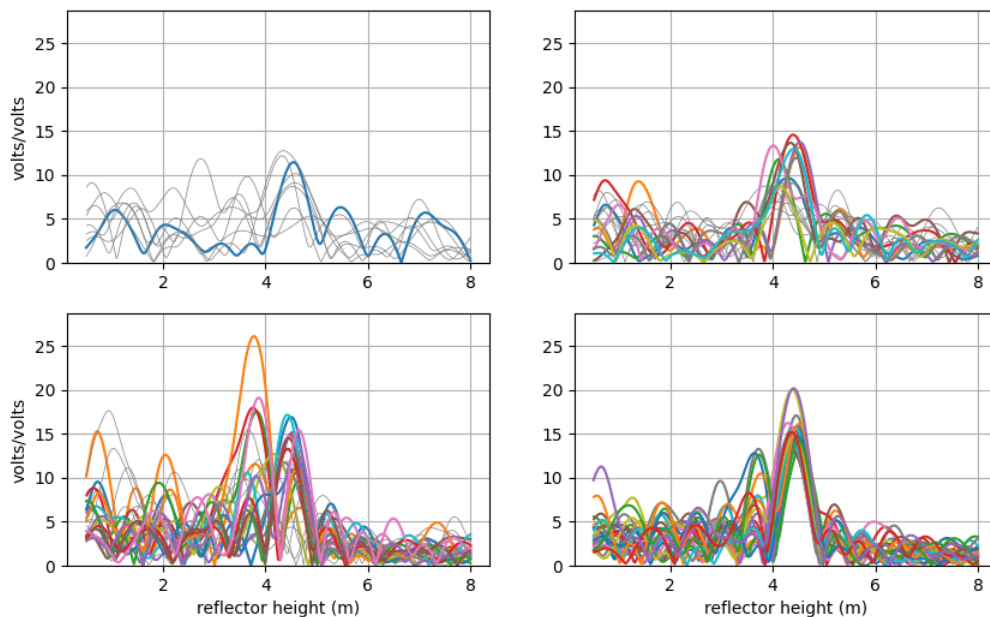

Example for a site on an ice sheet

Example for a taller site on an ice sheet

Warning: quickLook calculates the minimum observed elevation angle in your file and prints that to the screen so you

know what it is. It also uses that as your `emin` value (`e1`) if the default is smaller. It does this so you don't see all arcs as rejected. Let's say your file had a receiver-imposed elevation cutoff of 10 degrees. The default minimum elevation angle in `quickLook` is 5 degrees. With the default `ediff` value of 2, not a single arc would reach the minimum required value of 7 ($5 + 2$); everything would be rejected. `quickLook` instead sees that you have a receiver-imposed minimum of 10 and would substitute that for the default `emin`. `gnssir` does not do this because at that point you are supposed to have chosen a strategy, which is stored in the json file.

`quickLook -screenstats True` provides more information to the screen about why arcs have been rejected.

2.9 gnssir

gnssir_input

A full listing of the possible inputs and examples for `gnssir_input` can be found [here](#).

Your first task is to define your analysis strategy. We use station `p101` as an example. If the station location is in our database:

```
gnssir_input p101
```

If you have your own site, you should use `-lat`, `-lon`, `-height` as inputs.

If you happen to have the Cartesian coordinates (in meters), you can set `-xyz True` and input those instead.

The json file of instructions will be stored in `$REFL_CODE/input/p101.json`.

The default azimuth inputs are from 0 to 360 degrees. You can set your preferred azimuth regions using `-azlist2`. Previously you were required to use multiple azimuth regions, none of which could be larger than 100 degrees. That is no longer required. However, if you do need multiple distinct regions, that is allowed, e.g.

```
gnssir_input p101 -azlist2 0 90 180 270
```

If you wanted all southern quadrants, since these are contiguous, you just need to give the starting and ending azimuth.

```
gnssir_input p101 -azlist2 90 270
```

You should also set the preferred reflector height region (`h1` and `h2`) and elevation angle mask (`e1` and `e2`). Note: the reflector height region should not be too small, as it is also used to set the region for your periodogram. If you use tiny RH constraints, your periodogram will not make any sense and your work will fail the quality control metrics.

gnssir

`gnssir` estimates reflector heights. It assumes you have made SNR files and defined an analysis strategy. The minimum inputs are the station name, year, and doy.

```
gnssir p041 2020 150
```

Additional inputs

Where would the code store the files for this example?

- analysis instructions are stored in `$REFL_CODE/input/p041.json`
- SNR files are stored in `$REFL_CODE/2020/snr/p041`
- Reflector Height (RH) results are stored in `$REFL_CODE/2020/results/p041/150.txt`

For more information about the decisions made in `gnssir`, set **`-screenstats T`**

To have plots come to the screen, set `-plt` to `T` or `True`.

If you want to try different strategies, make multiple json files with the `-extension` input. Then use the same `-extension` command in `gnssir`.

This is a snippet of what the result file would look like

```
% gnssrefl, https://github.com/kristinmlarson
% Phase Center corrections have NOT been applied
% year, doy, RH, sat, UTctime, Azim, Amp, emin0, emax0, NumOf, freq, rise, EdotF, PkNoise, DelT, MJD, refr-appl
% (1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11) (12) (13) (14) (15) (16) (17)
% m hrs deg v/v deg deg values hrs min 1 is yes
2020 151 1.925 1 14.952 120.40 7.90 5.14 24.95 260 1 1 0.84517 5.59 64.75 58999.622998 1
2020 151 1.995 1 9.410 225.31 6.51 5.18 24.93 236 1 -1 -0.75974 3.91 58.75 58999.392095 1
2020 151 1.930 1 5.717 319.30 7.74 5.16 24.91 207 1 1 0.67554 5.15 51.50 58999.238194 1
2020 151 1.880 2 18.277 199.81 10.58 5.22 24.94 182 1 1 0.58884 5.58 45.25 58999.761539 1
2020 151 1.920 3 12.002 190.39 7.44 5.16 24.94 198 1 -1 -0.63144 4.68 49.25 58999.500081 1
2020 151 1.910 3 7.115 306.63 7.21 5.19 24.97 216 1 1 0.69272 4.59 53.75 58999.296435 1
2020 151 1.892 4 14.154 160.30 10.03 5.14 24.99 187 1 -1 -0.59952 6.32 46.50 58999.589757 1
2020 151 1.970 5 1.456 54.56 7.63 5.21 24.94 218 1 -1 -0.70039 4.20 54.25 58999.060671 1
2020 151 1.950 5 20.506 171.31 10.14 5.17 24.97 198 1 1 0.63146 5.63 49.25 58999.854421 1
2020 151 1.940 6 22.623 62.47 7.28 5.18 24.91 238 1 -1 -0.76263 4.88 59.25 58999.942616 1
2020 151 1.900 6 17.331 181.76 8.14 5.15 24.96 186 1 1 0.59437 4.77 46.25 58999.722130 1
2020 151 1.925 7 17.185 148.30 6.95 5.16 24.93 186 1 -1 -0.60020 4.53 46.25 58999.716053 1
2020 151 1.977 8 15.860 44.52 8.07 5.19 24.96 208 1 -1 -0.67217 4.96 51.75 58999.660845 1
2020 151 1.880 8 11.648 150.39 8.53 5.16 24.94 214 1 1 0.68352 5.86 53.25 58999.485324 1
2020 151 1.897 9 15.227 178.16 7.34 5.22 24.89 190 1 -1 -0.61098 4.09 47.25 58999.634456 1
```

Note that the names of the columns (and units) are provided (this may be out of date):

- *Amp* is the amplitude of the most significant peak in the periodogram (i.e. the amplitude for the RH you estimated).
- *DelT* is how long a given rising or setting satellite arc was, in minutes.
- *emin0* and *emax0* are the min and max observed elevation angles in the arc.
- *rise/set* tells you whether the satellite arc was rising (1) or setting (-1)
- *Azim* is the average azimuth angle of the satellite arc
- *sat* and *freq* are as defined for gnssrefl (i.e. 101 is Glonass L1)
- MJD is modified julian date
- PkNoise is the peak to noise ratio of the periodogram values
- last column is currently set to tell you whether the refraction correction has been applied
- EdotF is used in the RHdot correction needed for dynamic sea level sites. The units are hours/rad. When multiplied by RHdot (meters/hour), you will get a correction in units of meters. For further information, see the subdaily code.

FILES, FORMATS, FREQUENCIES

3.1 Environment Variables

You need three environment variables to run this code: REFL_CODE, ORBITS, and EXE. If you are using the jupyter notebooks or the docker, they are defined for you. If you are working with pypi or github install, you must define them EVERY TIME YOU USE THE CODE. This is most easily done by setting them in your setup script, which on my machine is called .bashrc.

3.2 GPS/GNSS Data Formats

Input observation formats: the code only recognizes RINEX 2.11, RINEX 3 and NMEA input files.

RINEX 2.11

We strongly prefer that you use lower case filenames. This is the standard at global archives. They must have SNR data in them (S1, S2, etc) and have the receiver coordinates in the header. The files should follow these naming rules:

- all lowercase
- station name (4 characters) followed by day of year (3 characters) then 0.yyo where yy is the two character year.
- Example: algo0500.21o where station name is algo on day of year 50 from the year 2021

Example filename : onsa0500.22o

RINEX 3

While we support RINEX 3 files, we do not read the RINEX 3 file itself - we rely on the gfzrnrx utility developed by Thomas Nischan at GFZ to translate from RINEX 3+ to RINEX 2.11 If you have RINEX 3 files, they should be all upper case (except for the extension rnx or crx).

Example filename: ONSA00SWE_R_20213050000_01D_30S_MO.rnx

- station name (9 characters where the last 3 characters are the country), underscore
- capital R or capital S , with underscore on either side
- four character year
- three character day of year
- four zeroes, underscore,
- 01D, underscore
- ssS, underscore, M0.
- followed by rnx (crx if it is Hatanaka format).

01D means it is one day. Some of the other parts of the very long station file name are no doubt useful, but they are not recognized by this code. By convention, these files may be gzipped but not unix compressed. If you want a generic translation program, you can try `rinex3_rinex2`. It has the requirement that you input the input and output file names.

For a few archives, we allow 1 sample per second files (which are all 15 minutes long). Please see the `rinex2snr` documentation page.

NMEA

NMEA formats can be translated to SNR using `nmea2snr`. Inputs are similar to `rinex2snr`: 4char station name, year, and day of year NMEA files are assumed to be stored as:

`$REFL_CODE + /nmea/ABCD/2021/ABCD0030.21.A`

for station ABCD in year 2021 and day of year 3.

NMEA files may be gzipped.

Additional information about `nmea2snr` is [in the code](#).

ORBITS

We have tried our best to make the orbit files relatively invisible to users. But for the sake of completeness, we are either using broadcast navigation files in the RINEX 2.11 format or precise orbits in the sp3 format.

EXECUTABLES

There are two key executables: `CRX2RNX` and `gfzrnrx`. For notebook and docker users, these are installed for you. pypi/github users must install them. The utility `installexe` should take care of this. They are stored in the directory defined by the EXE environment variable.

3.3 Where Files are Stored

File structure for station abcd in the year YYYY (last two characters YY), doy DDD:

- `REFL_CODE/input/abcd.json` - instructions for gnssir analysis, refraction files
- `REFL_CODE/YYYY/snr/abcd/abcdDDD0.YY.snr66` - SNR files
- `REFL_CODE/YYYY/rinex/abcd/` - RINEX files can be stored here
- `REFL_CODE/YYYY/results/abcd/DDD.txt` Lomb Scargle analysis goes here
- `REFL_CODE/YYYY/phase/abcd/DDD.txt` phase analysis
- `REFL_CODE/Files/` - various output files and plots will be placed here
- `ORBITS/YYYY/nav/autoDDD0.YYn` - GPS broadcast orbit file
- `ORBITS/YYYY/sp3/` - sp3 files of orbits - these use names from the archives.

RINEX files downloaded from archives are not stored by this code. In fact, quite the opposite. If they are being translated, they are deleted. Do not keep your only copy of RINEX files in your default directory.

You do not need precise orbits to do GNSS-IR. We only use them as a convenience. Generally we use multi-GNSS sp3 files. See the `rinex2snr` documentation for more details on the orbits you can use.

Some of the utilities and environmental products code store files in `REFL_CODE/Files` The locations of these files are always provided in the screen output.

The inputs to `gnssir` are generally stored in the `REFL_CODE/input` folder. This primarily means the Lomb Scargle data analysis inputs, i.e. the “json” files, e.g. `p041.json` for station p041. It also includes the refraction file (`p041_refr.txt`) that is created automatically. This calculation requires a set of parameters stored in a “pickle” format, `gpt_1wA.pickle`. This file should be automatically stored for you.

3.4 The SNR data format

Reminder: UTC does not exist in our world. Everything should be GPS time, which is UTC without leap seconds.

The snr options are mostly based on the need to remove the “direct” signal. This is not related to a specific site mask and that is why the most frequently used options (99 and 66) have a maximum elevation angle of 30 degrees. The azimuth-specific mask is decided later when you run **gnssir**. The SNR choices are:

- 66 is elevation angles less than 30 degrees (**this is the default**)
- 99 is elevation angles of 5-30 degrees
- 88 is all data
- 50 is elevation angles less than 10 degrees (good for very tall sites, high-rate applications)

66,99, etc are not good names for files. And for this I apologize. It is too late to change them now.

The columns in the SNR data are defined as:

- Satellite number (remember 100 is added for Glonass, 200 for Galileo etc)
- Elevation angle, degrees
- Azimuth angle, degrees
- **Seconds of the day, GPS time**
- elevation angle rate of change, degrees/sec.
- S6 SNR on L6
- S1 SNR on L1
- S2 SNR on L2
- S5 SNR on L5
- S7 SNR on L7
- S8 SNR on L8

The unit for all SNR data is dB-Hz.

3.5 GNSS frequencies

- 1,2,20, and 5 are GPS L1, L2, L2C, and L5
- 101,102 are Glonass L1 and L2
- 201, 205, 206, 207, 208: Galileo frequencies, which are set as 1575.420, 1176.450, 1278.70, 1207.140, 1191.795 MHz
- 302, 306, 307 : Beidou frequencies, defined as 1561.098, 1207.14, 1268.52 MHz

3.6 Additional files


- EGM96geoidDATA.mat is stored in REFL_CODE/Files
- station_pos.db is stored in REFL_CODE/Files. This is a compilation of station coordinates from Nevada Reno.
- gpt_1wA.pickle is stored in REFL_CODE/input. This file is used in the refraction correction.

3.7 Some comments about signals


3.7.1 GPS L2C

Why do I like L2C? What's not to like? It is a modern **civilian** code without high chipping rate. That civilian part matters because it means the receiver knows the code and thus retrievals are far better than a receiver having to do extra processing to extract the signal. Here is an example of a receiver that is tracking **both** L2P and L2C. Originally installed for the Plate Boundary Observatory, it is a Trimble. The archive (unavco) chose to provide only L2P in the 15 second default RINEX file. However, it does have the L2C data in the 1 second files. So that is how I am able to make this comparison. P038 is a very very very flat site.

Here are the L2P retrievals:

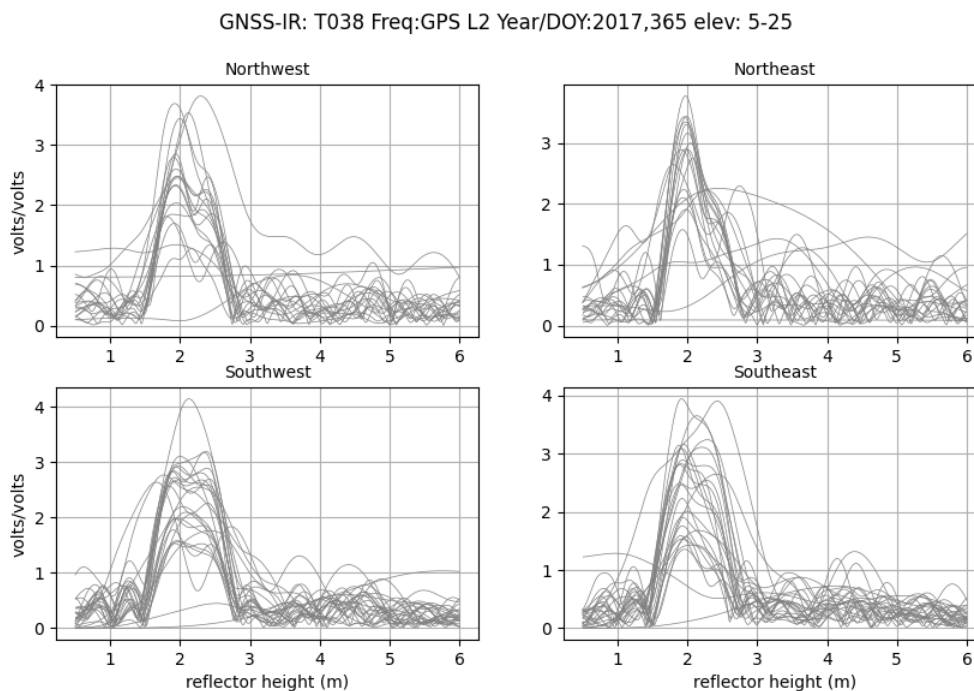

Now look at the L2C retrievals.

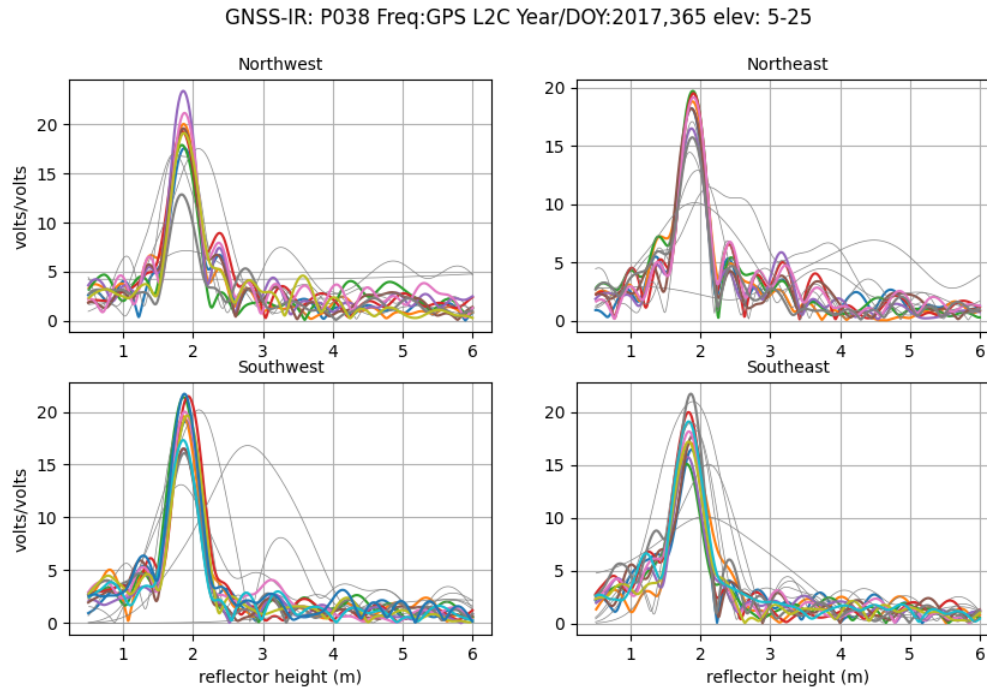

If you were trying to find a periodic signal, which one would you want to use?

To further confuse things, when the receiver was updated to a Septentrio, unavco began providing L2C data in the default 15 second files. This is a good thing - but it is confusing to people that won't know why the signal quality improved over night.


3.7.2 GPS L5

Another great signal. I love it. It does have a high chipping rate, which is relevant (i.e. bad) for reflectometry from very tall sites.


3.7.3 Aliasing

While it will show up in GPS results too - there seems to be a particularly bad problem with Glonass L1. I used an example from Thule. The RH is significant - ~20 meters. So you absolutely have to have at least 15 sec at the site or you violate the Nyquist. Personally I prefer to use 5 sec - which means I have to download 1 sec and decimate. This is extremely annoying because of how long it takes to ftp those files to my local machine. Let's look at L1 solutions using a 5 second file - but where I invoke the -dec option for gnssir. That way I can see the impact of the sampling. I also using the -plt T option.


This is 5 second GPS L1.

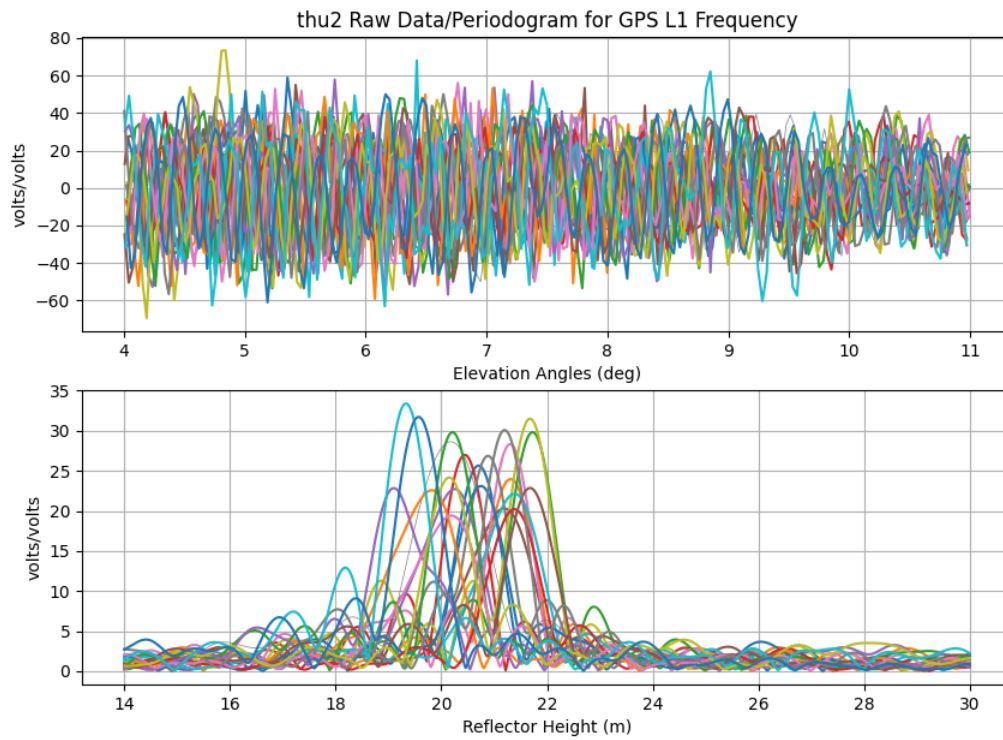


This is 15 second GPS L1. You see some funny stuff at 30 meters, and yes, the periodograms are noisier. But nothing insane.

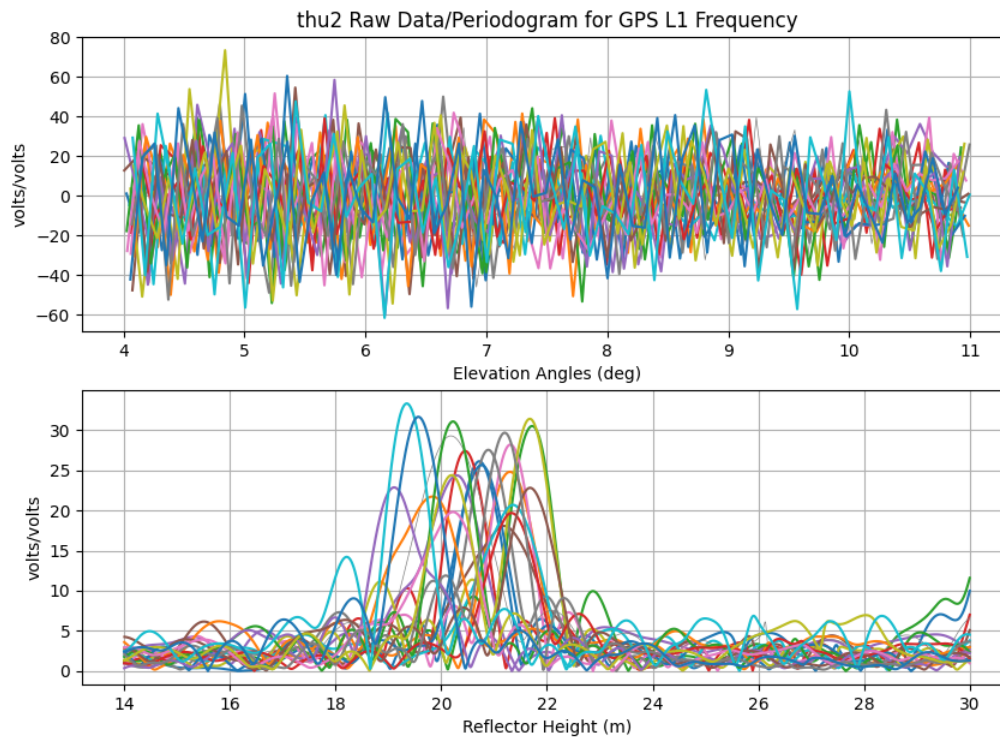

Now do 5 second Glonass L1

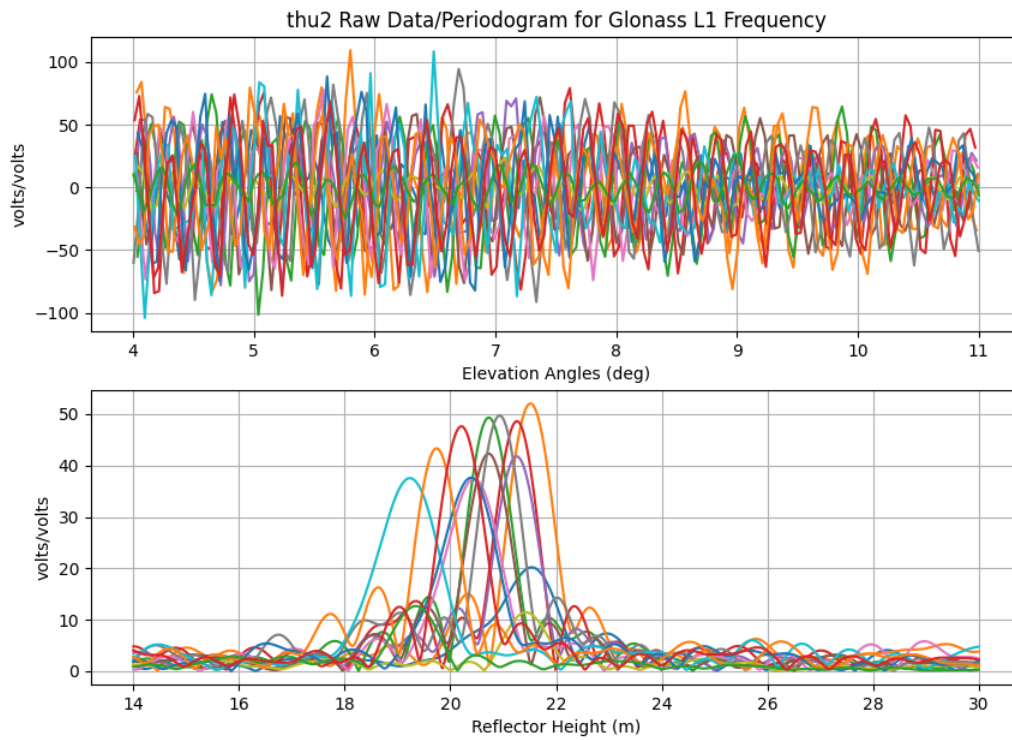


Contrast with the Glonass L1 results using 15 sec decimation! So yeah, aliasing is a problem.

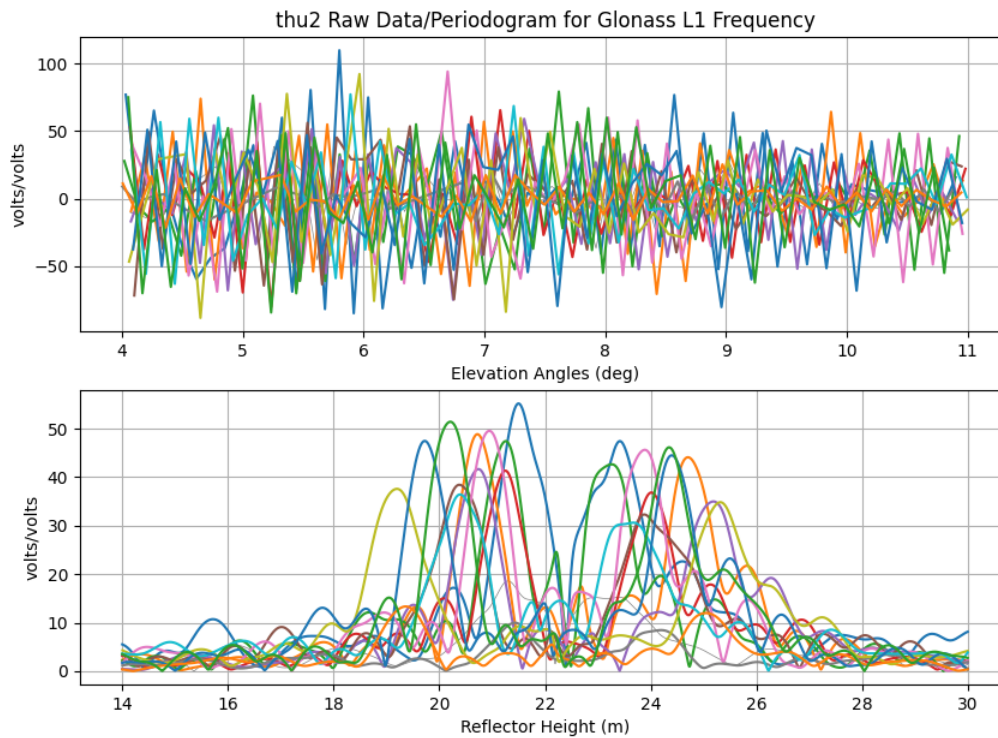


3.7.4 E5

Now about RINEX L8 ... also known as E5. This is one of the new Galileo signals. Despite the fact that it is near the frequencies of the other L5 signals, it is **not** the same. You can see that it in the multipath envelope work of Simsky et al. shown below.

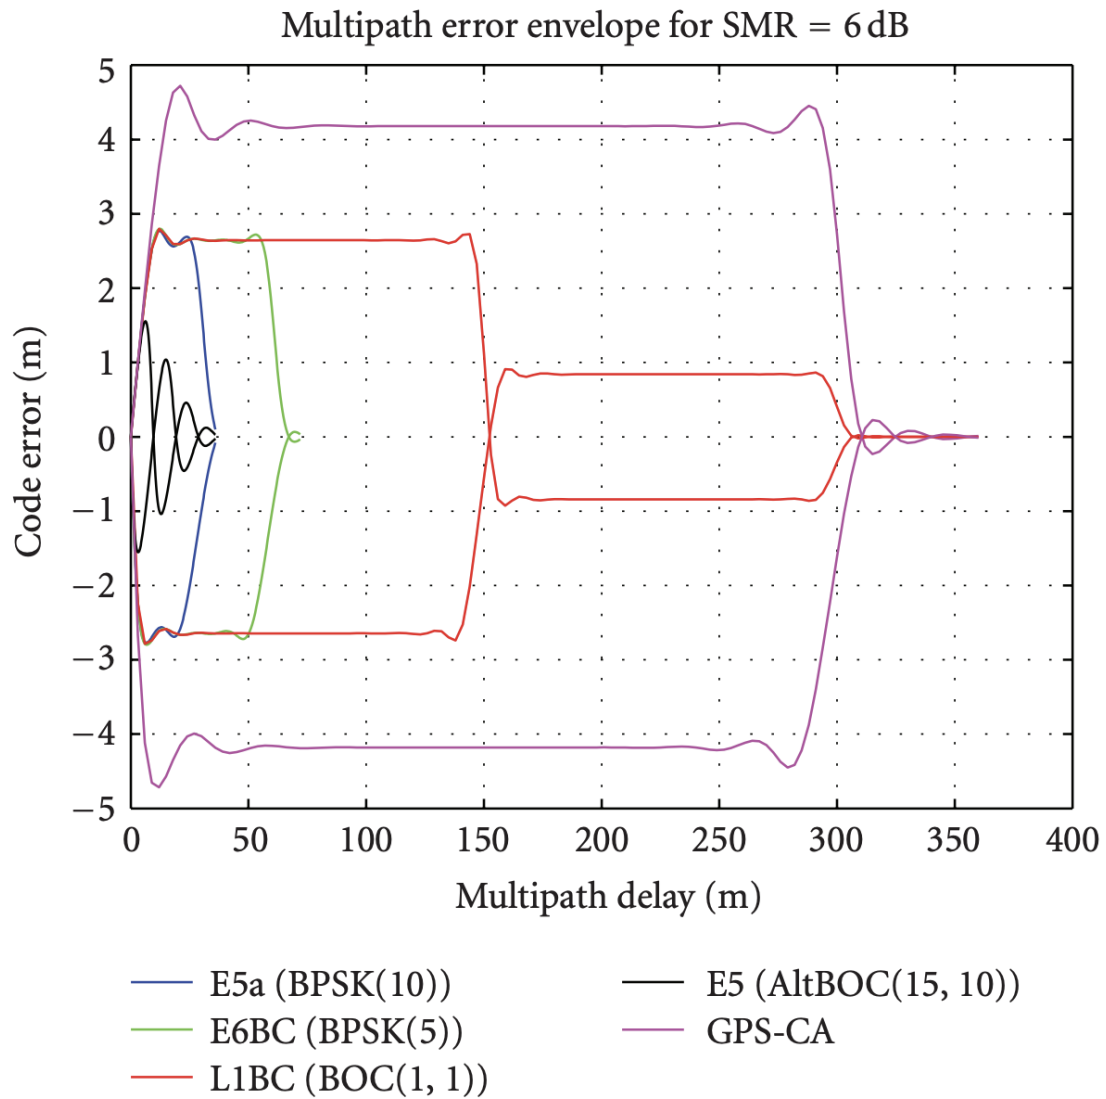


Most of you will not be familiar with multipath envelopes - but for our purposes, we want those envelopes to be big - cause more multipath, better GNSS-IR. First thing, multipath delay shown on the x-axis is NOT the reflector height (RH). it is $2RH\sin(\text{elevation angle})$. So even a pretty tall RH will not be obstructed by the new Galileo codes except for E5.

This is E5a

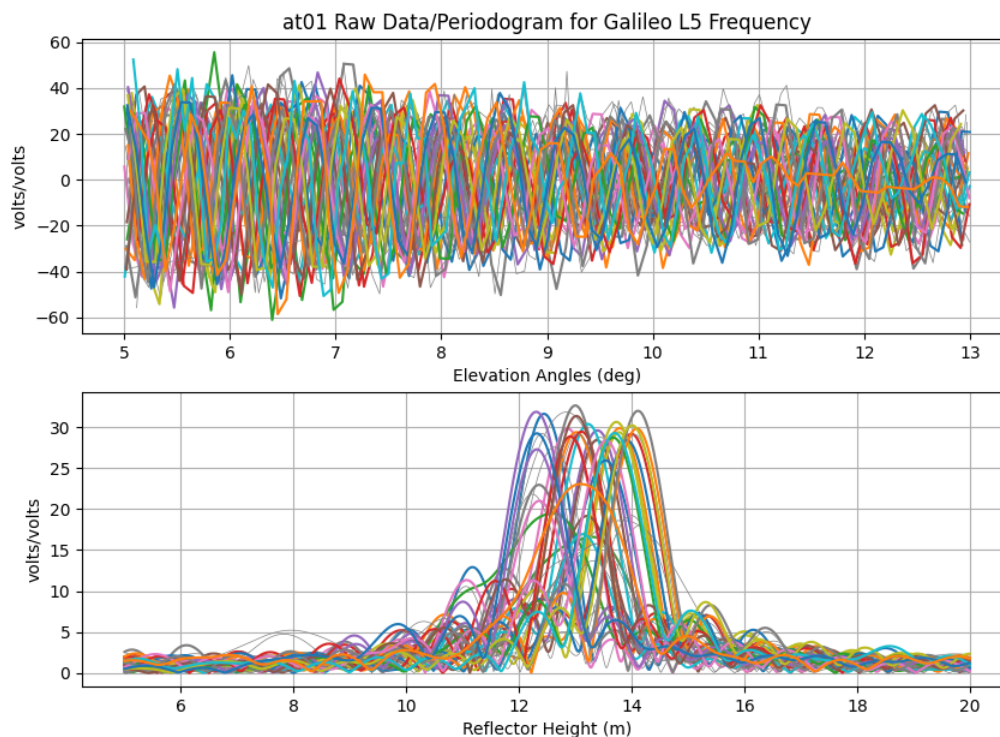

This is E5. Note that instead of nice clean peaks, it is spread out. You can also see that the E5 retrievals degrades as elevation angle increases, which is exactly what you would expect with the multipath delay increasing with elevation angle. I would just recommend only using this signal for RH < 5 meters. And even then, if you are tracking L8, you probably also have L5, L6, and L7, so there is not a ton gained by also using L8.

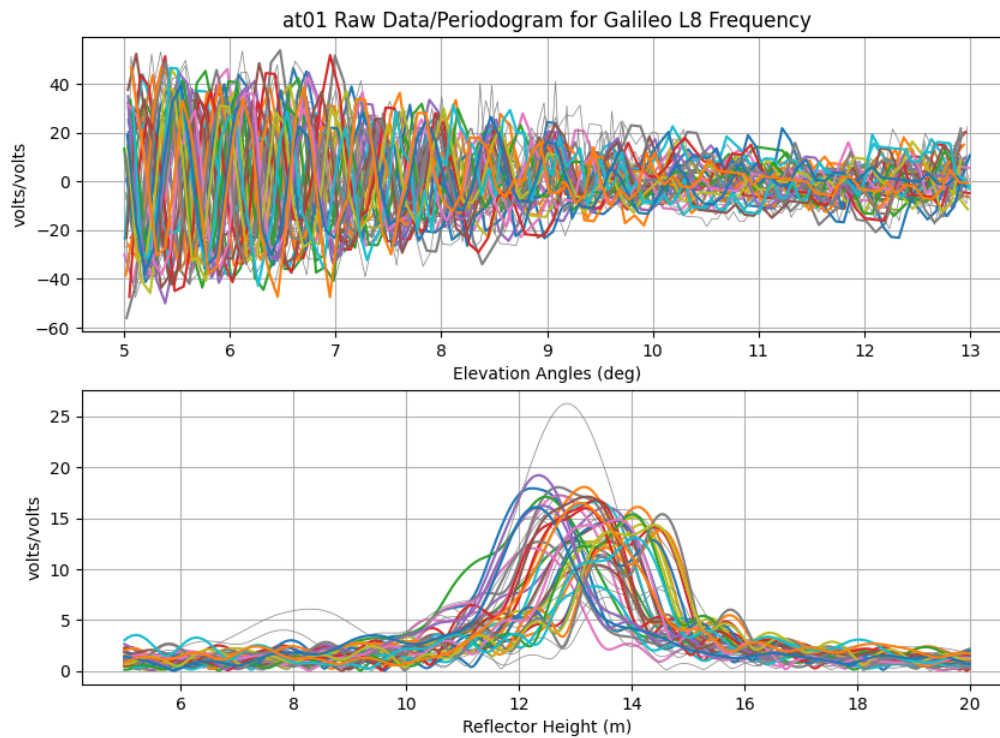

3.7.5 What about L1C?

I would be happy to host some results from L1C - please submit a pull request with the needed figures and a description of what you are comparing. I imagine this would require making two snr files - one with L1C and one with L1 C/A. And using only the small subset of satellites that transmit L1C. From what I have seen, it is not much better than L1 C/A - which surprises me. But I have to imagine it is receiver dependent (some receivers have terrible C/A SNR).

The multipath envelope figure is taken from:

Title: Experimental Results for the Multipath Performance of Galileo Signals Transmitted by GIOVE-A Satellite

Authors: Andrew Simsky, David Mertens, Jean-Marie Sleewaegen, Martin Hollreiser, and Massimo Crisci

International Journal of Navigation and Observation Volume 2008, DOI 10.1155/2008/416380

QUICK LINKS TO THE CODE

I originally made special documentation pages for different modules. I am now trying to put all documentation INTO the code itself using readthedocs. That includes example calls. While I still have some discussion pages (so a link to the code and a link to a discussion page), those discussion links will likely go away in the not very distant future.

4.1 Main Functions

- [rinex2snr](#)
- [quickLook](#)
- [gnssir code](#), [gnssir inputs](#)

4.2 Additional Utilities

- [nmea2snr](#)
- [daily_avg code](#), [discussion](#)
- [invsnr code](#), [discussion](#), [invsnr_input](#)
- [refl_zones](#)

4.3 Environmental Products

- [snowdepth code](#), [discussion](#)
- [tides code](#), [discussion](#)
- [vwc code](#), [discussion](#), [vwc_input](#), [phasecode](#), TBD

4.4 Download Scripts

- `download_orbits`
- `download_rinex`
- `download_tides`
- `download_unr`

4.5 Utilities

- `check_rinex_file`
- `gpsweek`
- `installexe`
- `llh2xyz`
- `max_resolve_RH`
- `mjd`
- `query_unr`
- `quickplt`
- `rinex3_rinex2`
- `rinex3_snr`
- `rinex_coords`
- `smoosh`
- `smoosh_snr`
- `xyz2llh`
- `ymd`
- `ydoy`

USE CASES

About 75% of these use cases use access to the Earthscope/UNAVCO archive. In some cases, `sopac` can be used as an alternate archive. If at all possible, you should [sign up for an EarthScope account](#).

Some of these use cases were created with an earlier version of the `gnscrefl` software. The plots might look slightly different and the defaults we used in the analysis might have changed.

5.1 Ice Sheets

- Lorne, Antarctica
- Dye2, Greenland
- Thwaites Glacier, Antarctica
- Summit Camp, Greenland
- Phoenix, Antarctica

5.2 Lakes, Reservoirs, and Rivers

- Michipicoten, Canada
- Lake Taupo, New Zealand
- Steenbras, South Africa
- St Lawrence River, Canada
- Lake Mathews, Riverside, USA
- Lake Malawi, Tanzania
- Lake Yellowstone, USA
- Wesel, Germany

5.3 Soil Moisture

- Portales, New Mexico USA
- Mitchell, Australia
- Victorville, California USA
- Boulder, Colorado USA

5.4 Seasonal Snow Accumulation

- Marshall, Colorado USA
- Niwot Ridge, Colorado USA
- Half Island Park, Idaho USA
- Utqiagvik, Alaska USA

5.5 Tides

- Friday Harbor, Washington USA
- St Michael, Alaska USA
- Vlissingen, the Netherlands
- Puerto Penasco, Mexico
- Elbe River, Germany

5.6 GPS Tool Box Demonstration

- MNIS (not finished)

5.7 Homeworks from Previous Shortcourses:

- Homework 0: Make sure you have properly installed the software
- Homework 1: Practice setting your azimuth and elevation angle mask
- Homework 2: Learn how to measure snow surface variations
 - Homework 2 Solution
- Homework 3: Learn how to measure water levels
 - Homework 3 Solution

COMMUNITY

6.1 Publications

- [One Receiver, Zenith Pointing](#)
- [Non-Zenith Pointing Antenna Examples](#)

6.2 Acknowledgements

- [Kristine M. Larson](#) Overall
- [Kelly Enloe](#) Jupyter Notebooks
- [Tim Dittmann](#) Access to Dockers
- [Radon Rosborough](#) helped with python/packaging questions, improved our docker distribution, and set up smoke tests.
- [Naoya Kadota](#) added the GSI data archive and helped find a bug in nmea2snr.
- [Joakim Strandberg](#) provided python RINEX translators and the EGM96 code.
- [Johannes Boehm](#) provided source code for the refraction correction.
- [Makan Karegar](#) added the NMEA capability.
- [Dave Purnell](#) provided his SNR inversion code.
- [Carolyn Roesler](#) helped with the original GNSS-IR Matlab codes.
- [Felipe Nievinski](#) and [Simon Williams](#) have provided significant advice for this project.
- [Clara Chew](#) and [Eric Small](#) developed the soil moisture algorithm; I ported it to python with Kelly's help.
- [Sree Ram Radha Krishnan](#) ported the rzones web app code.
- [Dan Nowacki](#) added Glonass to the NMEA reader
- [Taylor Smith](#) has worked on the NMEA reader and the refl_zones utility.
- [Surui Xie](#) was instrumental in finding a bug in the newarcs version
- [Peng Feng](#), [Rudiger Haas](#), and [Gunnar Elgered](#) have helped us improve refraction models.

6.3 How you can help improve this code

- Archives frequently change their file transfer protocols. If you find one in gnssrefl that doesn't work anymore, please fix it and let us know. Please test that it works for both older and newer data.
- If you would like to add an archive, please do so. Use the existing code as a starting point.
- Check the [issues section](#) of the repository and look for "help wanted."
- Write up a new [use case](#)
- Investigate surface related biases.

6.4 How to get help with your gnssrefl questions

If you are new to the software, you should consider watching the [videos about GNSS-IR](#)

Before you ask for help - you should check to see if you are running the current software. Please go to the install page for help on how to update your latest docker/jupyter installs. For github/pypi, we recommend doing a clean download and new install.

You are encouraged to submit your concerns as an issue to the [github repository](#). If you are unfamiliar with github, you can also email Kelly (enloe@earthscope.org) about Jupyter NoteBooks or Tim (dittmann@earthscope.org) for commandline/docker issues. Please include

- the exact command or section of code you were running that prompted your question.
- details such as the error message or behavior you are getting. Please copy and paste (this is preferred over a screenshot) the error string. If the string is long - please post the error string in a thread response to your question.
- the operating system of your computer.

Would you like to join our gnssrefl users email list? This is currently operated by earthscope.org. To join, please send Kristine an email.


[Old news section from before we moved to readthedocs](#)

Updated August 17, 2023

Kristine M. Larson

2023 GNSS-IR SHORT COURSE

[Documentation](#) | [KL Videos](#) | [Course Materials](#) | [Installation](#) | [Earthscope](#) |

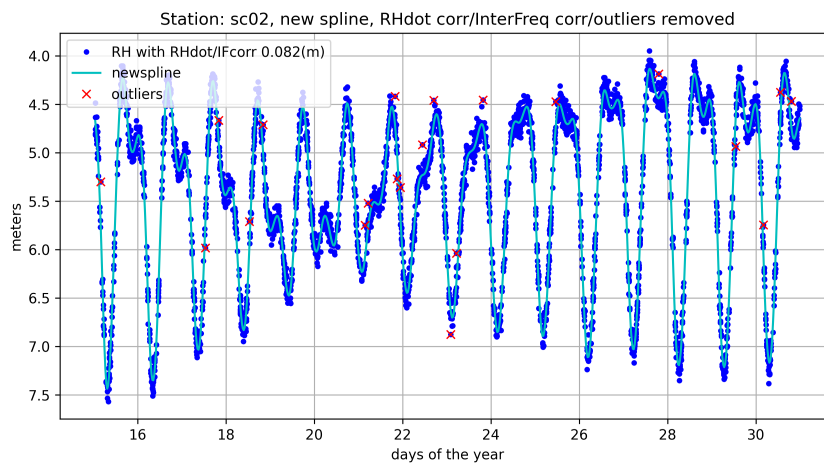

7.1 Agenda

May 2. Basic principles of GNSS-IR, How to run the gnsirefl software

May 3. Hydrologic Applications: snow accumulation and soil moisture

May 4. Water applications: lakes, rivers, tides

May 5: Optimizing site installations, GNSS-IR API, improving the software, low-cost sensors

The course meets each day from 09:00-11:00 MDT/17:00-19:00 CET. There will be a short break at the midpoint.

7.2 Before the Class Begins

Getting Started

7.3 Questions

For software installation questions, please use our Slack channel. [To join please use this link](#)

7.4 Videos

Some [older videos](#) about GNSS-IR are already available.

Welcome video posted April 19

[Links to the lectures materials and the videos](#)

7.5 Sponsors

[Collaborative Research Center 1502 DETECT, Bonn University](#)

[EarthScope](#)

7.6 Course Instructors

Kristine Larson, Bonn University, Germany

Simon Williams, Nat. Ocean Ctr.- United Kingdom

Felipe Nievinski, Uni. Federal do Rio Grande do Sul - Brazil

David Purnell, Laval University - Canada

Thomas Nylen, Danish Technical University, Denmark

Kelly Enloe, EarthScope - USA

Tim Dittmann, EarthScope - USA

WHAT IS A GOOD GNSS REFLECTIONS SITE?

A good GNSS reflection site has:


- a large reflection zone
- good receiver tracking multiple GNSS signals and modern (L2C,L5) GPS signals
- sampling rate that is commensurate with what you are trying to measure (i.e. 30 second sampling rate won't work for stations that are more than 8-9 meters above the reflecting surface).
- RINEX files with positions in the header and (preferably float) SNR data

8.1 Reflection Zones


The only inputs needed to calculate your reflection zones are:

- the approximate position of the GNSS site
- the positions of the GNSS satellites
- the height of the antenna above the reflecting surface
- the GNSS signal wavelength (~ 0.19 or 0.244 meters for L1 vs. L2)

The equations you need for a Fresnel zone are given in the appendix for Larson and Nievinski (2013). Here are static examples for a 2 meter reflector height for L1 and L2.

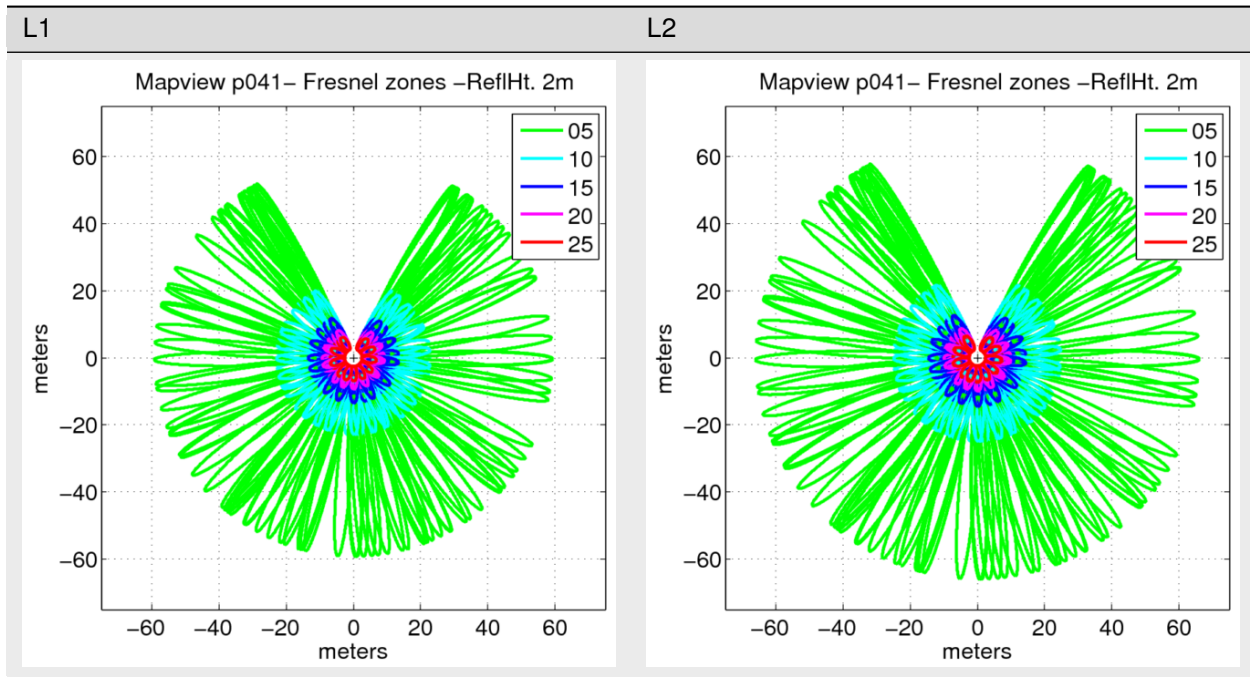

Compare with a 25 meter reflector height:

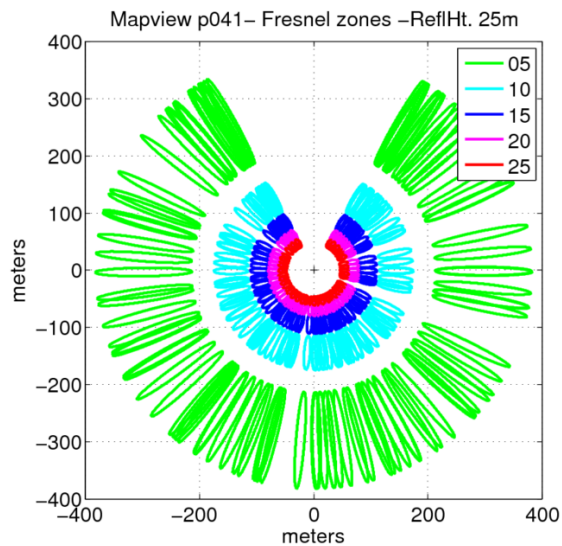

25m reflector height Fresnel zone

Similarly, the sampling rate you need to use is not unknown – you just need to understand how the Nyquist frequency is defined for the SNR observations.

8.2 Designing a good GNSS Reflections Site:

- Sampling interval should be commensurate with your reflection target area. You can generally get away with 30 sec for surfaces that are < 10 meters below the antenna, but I urge you to use **15 sec**. For reflectors larger than 50 meters, I recommend 1 sec sampling. The bare minimum sampling rate numbers you need can be calculated using the code in [Roesler and Larson \(2018\)](#). This code can also be run from [the GNSS-IR web app](#)
- Make sure your antenna is surrounded by natural planar surfaces. No crashing waves. No outlet glaciers. No large ships coming and going.
- Use the [reflection zone app](#) or the python utility `refl_zones` to make sure that you can sense the surface you want to measure. This is extremely important for water levels, as many groups think seeing the water in a photo means you can measure it. All you need to check this is the position of your site. The app will calculate the geoid correction for the ellipsoidal height. If you are trying to measure an interior water body (where mean sea level is not relevant), there is a manual override.
- If you have flexibility, take into account that sites at mid-latitudes have holes in their sensing zone. In CONUS, don't face your GNSS receiver to the north. In southern Africa, South America, and Australia, don't try to use GNSS-IR to measure water levels to the south.
- If you are trying to measure snow accumulation in polar regions, you should ensure that your antenna is always at least 1 meters above the highest snow level. This may mean you need to revisit your site to reset the pole vertically.

8.3 Operating a good GNSS reflections site:

- Always remove the elevation mask on the receiver.
- Set the sampling interval by evaluating reflection surfaces. The standard GNSS sampling interval of thirty seconds was selected over thirty years ago before the internet existed! Collect (and archive) more data.
- Take photographs of your site.
- If you plan to put your GNSS antenna on a roof, pick the corner that gives you the best view of natural surfaces.
- Track all GPS signals! (L1 and L1C, L2P and L2C, L5). If you can track GLONASS, Galileo, Beidou without costing a lot of money, I strongly recommend it.
- It doesn't matter if you turn on multipath suppression algorithms or buy a fancy antenna. They don't stop multipath.
- Put SNR data in your RINEX file. RINEX 3 is generally preferred because it makes it easy to include all signals, but RINEX 2.11 is fine as long as you make sure the file has L2C and L5 in it.

8.4 Further reading

- [Site guidelines for multi-purpose GNSS reflectometry stations](#)

API DOCUMENTATION

Information on specific functions, classes, and methods.

9.1 gnssrefl package

9.1.1 Submodules

gnssrefl.EGM96 module

class gnssrefl.EGM96.EGM96geoid

Bases: object

Class for EGM96 geoid corrections

Example

```
>>> egm = EGM96geoid()
>>> egm.heights(lat=10, lon=30)
-5.32
```

height(*lat: float, lon: float*)

gnssrefl.check_rinex_file module

gnssrefl.check_rinex_file.**check_l2**(*i, savebase, nsat_line1, lines, nlin, l2index, year, doy*)

Parameters

- **i** (*int*) – line number index in RINEX file
- **savebase** (*str*) – list of satellites at first epoch
- **nsat_line1** (*int*) – number of satellites in first epoch
- **nlin** (*int*) – number of lines per satellite allocated in RINEX file
- **l2index** (*int*) – index of L1 observable
- **year** (*int*) – full year
- **doy** (*int*) – day of year

gnssrefl.check_rinex_file.**check_rinex_file**(*rinexfile*)

commandline tool to look at header information in a RINEX file tries to look for existence of L2C data

Example

```
check_rinex_file p0311520.21o
```

Parameters

rinexfile (*str*) – name of the RINEX 2.11 file

```
gnssrefl.check_rinex_file.main()
```

gnssrefl.computemp1mp2 module

```
gnssrefl.computemp1mp2.ReadRecAnt(teqclog)
```

prints out Receiver and Antenna name from a teqc log

Parameters

teqclog (*str*) – the name of a teqc log

```
gnssrefl.computemp1mp2.check_directories(station, year)
```

checks that directories exist for teqc logs

Parameters

- **station** (*str*) – 4 character station name
- **year** (*int*) – full year

```
gnssrefl.computemp1mp2.get_files(station, year, doy, look)
```

Parameters

- **station** (*str*) – 4 character station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **look** (*bool*) – whether you should try to get the file from unavco if it does not exist locally

Returns

- **navfile** (*str*) – navigation/orbit file
- **rinexfile** (*str*) – name of the obs file
- **foutname** (*str*) – full name of the teqc log output
- **mpdir** (*str*) – directory for MP results
- **goahead** (*boolean*) – whether you should go ahead and run teqc

```
gnssrefl.computemp1mp2.main()
```

computes MP1 MP2 stats using teqc or reads existing log

```
gnssrefl.computemp1mp2.readoutmp(teqcfile, rcvtype)
```

teqcfile input is the full name of a teqc log rcvtype is a string that includes the name of the receiver you are searching for. it does not have to be exact (so NETR would work for NETRS) returns MP1, MP2 (both in meters), and a boolean as to whether the values were found if rcvtype is set to NONE, it will return data without restriction

```
gnssrefl.computemp1mp2.run_teqc(teqc, navfile, rinexfile, foutname, mpdir)
```

run teqcs and stores the output

Parameters

- **teqc** (*str*) – location of the teqc executable
- **navfile** (*str*) – name of the RINEX nav file
- **rinexfile** (*string*) – name of the RINEX observation file
- **foutname** (*str*) – name of the output file
- **mpdir** (*str*) – location of the multipath directory on your system

`gnssrefl.computemp1mp2.sfilename(station, year, doy)`

Finds mp1 filename on your system

Parameters

- **station** (*string*) – 4 character station name
- **year** (*integer*) –
- **doy** (*integer*) – day of year

Returns

xfile – the full SNR filename on your local system

Return type

string

`gnssrefl.computemp1mp2.vegplt(station, tv, winter)`

makes a plot of MP1 multipath metric. Sends to the screen

Parameters

- **station** (*str*) – 4 ch station name
- **tv** (*np array*) – (year, doy, mp1, mp2)
- **winter** (*bool*) – whether to throw out ~jan-apr and ~oct-dec

gnssrefl.daily_avg module

`gnssrefl.daily_avg.daily_avg_stat_plots(obstimes, meanRH, meanAmp, station, txt_dir, tv, ngps, nglo, ngal, nbei, test)`

plots of results for the daily avg code

Parameters

- **obstimes** (*datetime object*) –
- **meanRH** (*numpy array*) – daily averaged Reflector Height values in meters
- **meanAmp** (*numpy array*) – daily average RH amplitude
- **station** (*str*) – 4 character station name
- **txt_dir** (*str*) – directory for the results
- **tv** – is the variable of daily results
- **ngps** (*numpy array*) – number of gps satellites each day
- **nglo** (*numpy array*) – number of glonass satellites each day
- **ngal** (*numpy array*) – number of galileo satellites each day
- **nbei** (*numpy array*) – number of beidou satellites each day

- **test** (*bool*) –

`gnssrefl.daily_avg.fbias_daily_avg(station)`

reads QC-RH values and the daily averages computes residuals and estimate the frequency bias for all available frequencies which is printed to the screen

Parameters

station (*str*) – station name - 4char - lowercase

`gnssrefl.daily_avg.quick_raw(alldatafile2, xdir, station, subdir)`

quick plot of the raw RH data. No QC

Parameters

- **alldatafile2** (*str*) – name of the raw file to be read
- **xdir** (*str*) – code environ variable (I think)
- **station** (*str*) – 4 ch station name
- **subdir** (*str*) – subdirectory name for results in xdir/Files

`gnssrefl.daily_avg.readin_plot_daily(station, extension, year1, year2, fr, alldatafile, csvformat, howBig, ReqTracks, azim1, azim2, test, subdir, plot_limits)`

worker code for `daily_avg_cl.py`

It reads in RH files created by `gnssir`. Applies median filter and saves average results for further analysis

if there is only one RH on a given day - there is no median value and thus nothing will be saved for that day.

Parameters

- **station** (*str*) – station name, 4 ch, lowercase
- **extension** (*str*) – folder extension - usually empty string
- **year1** (*integer*) – first year
- **year2** (*integer*) – last year
- **fr** (*integer*) – 0 for all frequencies. otherwise, it must be a legal frequency (101 for Glonass L1)
- **alldatafile** (*str*) – name of the output filename
- **csvformat** (*boolean*) – whether you want output as csv format
- **howBig** (*float*) – criterion for the median filter, i.e. how far in meters can a RH be from the median for that day, in meters
- **ReqTracks** (*integer*) – is the number of retrievals required per day
- **azim1** (*integer*) – minimum azimuth, degrees
- **azim2** (*integer*) – maximum azimuth, degrees
- **test** (*bool*) –
- **subdir** (*boolean*) – subdirectory for output files
- **subdir** – whether plot limits for the median filter are shown

Returns

- **tv** (*numpy array*) – with these values [year, doy, meanRHtoday, len(rh), month, day, stdRH, averageAmplitude] len(rh) is the number of RH on a given day stdRH is the standard deviation of the RH values (meters) averageAmplitude is in volts/volts

- **obstimes** (*list of datetime objects*) – observation times

`gnssrefl.daily_avg.write_out_RH_file(obstimes, tv, outfile, csvformat)`

write out the daily average RH values

Parameters

- **obstimes** (*datetime object*) –
- **tv** (*numpy array*) – content of a LSP results file
- **outfile** (*string*) – full name of output file
- **csvformat** (*boolean*) – true if you want csv format output

`gnssrefl.daily_avg.write_out_all(allrh, csvformat, NG, yr, doy, d, good, gazim, gfreq, gsat, gamp, gpeak2noise, gutcTime, tvall)`

writing out all the RH retrievals to a single file: file ID is allrh) tvall had everything in it, but it was slowing everything down, so i do not do anything with it.

Parameters

- **allrh** (*fileID for writing*) –
- **csvformat** (*bool*) – whether you are writing to csv file
- **NG** (*int*) – number of lines of results
- **yr** (*int*) – year
- **doy** (*int*) – day of year
- **d** (*datetime object*) –
- **good** (*float*) – reflector height - I think
- **gazim** (*numpy array of floats*) – azimuths
- **gfreq** (*numpy array of int*) – frequencies
- **gsat** (*numpy array of int*) – satellite numbers
- **gamp** (*numpy array of floats*) – amplitudes of periodograms
- **gpeak2noise** (*numpy array of floats*) – peak 2 noise for periodograms
- **gutcTime** (*numpy array of floats*) – time of day in hours
- **tvall** –

Returns

tvall

Return type

??

gnssrefl.daily_avg_cl module

`gnssrefl.daily_avg_cl.daily_avg(station: str, medfilter: float, ReqTracks: int, txtfile: str = None, plt: bool = True, extension: str = "", year1: int = 2005, year2: int = 2030, fr: int = 0, csv: bool = False, azim1: int = 0, azim2: int = 360, test: bool = False, subdir: str = None, plot_limits: bool = False)`

The goal of this code is to consolidate individual RH results into a single file consisting of daily averaged RH without outliers. These daily average values are nominally associated with the time of 12 hours UTC.

There are two required parameters - `medfilter` and `ReqTracks`. These are quality control parameters. They are applied in two steps. The code first calculates the median value each day - and keeps only the RH that are within `medfilter` (meters) of this median value. If there are at least “ReqTracks” number of RH left after that step, a daily average is computed for that day.

If you are unfamiliar with what a median filter does in this code, please see https://gnssrefl.readthedocs.io/en/latest/pages/README_dailyavg.html

The outputs are stored in `$REFL_CODE/Files/station` by default. If you want to specify a new subdirectory, I believe that is an allowed option. You can also specify specific years to analyze and apply fairly simple azimuth constraints.

In summary, three text files are created

1. individual RH values with no QC applied
2. individual RH values with QC applied
3. daily average RH

Examples

daily_avg p041 0.25 10

consolidates results for p041 with median filter of 0.25 meters and at least 10 solutions per day

daily_avg p041 0.25 10 -plot_limits T

the same as above but with `plot_limits` to help you see where the median filter is applied

daily_avg p041 0.25 10 -year1 2015 -year2 2020

consolidates results for p041 with median filter of 0.25 meters and at least 10 solutions per day and restricts it to years between 2015 and 2020

daily_avg p041 0.25 10 -year1 2015 -year2 2020 -azim1 0 -azim2 180

consolidates results for p041 with median filter of 0.25 meters and at least 10 solutions per day and restricts it to years between 2015 and 2020 and azimuths between 0 and 180 degrees

daily_avg p041 0.25 10 -extension NV

consolidates results which were created using the extension NV when you ran `gnssir`.

Parameters

- **station** (*str*) – 4 ch station name, generally lowercase
- **medfilter** (*float*) – Median filter for daily reflector height (m). Start with 0.25 for surfaces where you expect no significant subdaily change (snow/lakes).
- **ReqTracks** (*int*) – Required number of daily satellite tracks to save the daily average value.
- **txtfile** (*str*, *optional*) – Use this parameter to set your own output filename. default is to let the code choose.
- **plt** (*bool*, *optional*) – whether to print plots to screen or not. default is True.

- **extension** (*str*, *optional*) – extension for solution names. default is ‘’. (empty string)
- **year1** (*int*, *optional*) – restrict to years starting with. default is 2005.
- **year2** (*int*, *optional*) – restrict to years ending with. default is 2030.
- **fr** (*int*, *optional*) – GNSS frequency. If none input, all are used. Value options:
 - 1 : GPS L1
 - 2 : GPS L2
 - 20 : GPS L2C
 - 5 : GPS L5
 - 101 : GLONASS L1
 - 102 : GLONASS L2
 - 201 : GALILEO E1
 - 205 : GALILEO E5a
 - 206 : GALILEO E6
 - 207 : GALILEO E5b
 - 208 : GALILEO E5
 - 302 : BEIDOU B1
 - 306 : BEIDOU B3
 - 307 : BEIDOU B2
- **csv** (*boolean*, *optional*) – Whether you want csv instead of a plain text file. default is False.
- **azim1** (*int*, *optional*) – minimum azimuth, degrees note: should be modified to allow negative azimuth
- **azim2** (*int*, *optional*) – maximum azimuth, degrees
- **test** (*bool*, *optional*) – not sure what this does
- **subdir** (*str*, *optional*) – non-default subdirectory for Files output
- **plot_limits** (*bool*, *optional*) – adds the median value and median filter limits to the plot. default is False

```
gnssrefl.daily_avg_cl.main()
```

```
gnssrefl.daily_avg_cl.parse_arguments()
```

gnssrefl.decipher_argt module

`gnssrefl.decipher_argt.decipher_argt(station, filename, idec, snrname, orbfile, recx, csnr, year, month, day)`

This is an attempt to properly model the satellite orbits. It uses GNSS orbits from the GFZ and Fortran to compute azimuth and elevation angle. Right now it is L1 only, but does allow Galileo, GPS, and Glonass. It does require that someone send a proper station location.

This code was written specifically for a dataset collected in Argentina. It is not in NMEA format but was parsed from it.

Parameters

- **station** (*str*) – 4 char id
- **filename** (*str*) – NMEA output from Argentina
- **idec** (*int*) – decimation interval, sec
- **snrname** (*str*) – ultimaet output file
- **orbfile** (*str*) – sp3 filename
- **recx** (*list of floats*) – Cartesian station coordinates in meters
- **csnr** (*str*) – 2 ch snr file choice, i.e. ‘66’ or ‘99’
- **year** (*int*) – full yaer
- **month** (*int*) – calendar month
- **day** (*int*) – calendar day

`gnssrefl.decipher_argt.new_azel(station, tmpfile, snrname, orbfile, csnr)`

This is an attempt to properly model the satellite orbits. It uses GNSS orbits from the GFZ and Fortran to compute azimuth and elevation angle. Right now it is L1 only, but does allow Galileo, GPS, and Glonass. It does require that someone send a proper station location.

Parameters

- **tmpfile** (*str*) – NMEA output from Argentina
- **snrname** (*str*) – ultimaet output file
- **orbfile** (*str*) – sp3 filename
- **csnr** (*str*) – 2 ch snr file choice, i.e. ‘66’ or ‘99’

gnssrefl.download_ioc module

`gnssrefl.download_ioc.download_ioc(station: str, date1: str, date2: str, output: str = None, plt: bool = False, outliers: bool = False, sensor=None, subdir: str = None)`

Downloads and saves IOC tide gauge files

Parameters

- **station** (*str*) – IOC station name
- **date1** (*str*) – begin date in yyyyymmdd. Example value: 20150101
- **date2** (*str*) – end date in yyyyymmdd. Example value: 20150101
- **output** (*str*) – Optional output filename default is None The file will be written to REFL_CODE/Files

- **plt** (*bool*, *optional*) – plot comes to the screen default is None
- **outliers** (*bool*, *optional*) – tried to remove outliers, but it doesn't work as yet default is No
- **sensor** (*str*, *optional*) – type of sensor, prs(for pressure), rad (for radar), flt (for float) default is None, which means it will print out what is there. if there is more than one sensor you should specifically ask for the one you want

`gnssrefl.download_ioc.find_start_stop(year, m)`

finds the start and stop times for each month of the IOC download

Parameters

- **year** (*int*) – full year
- **m** (*int*) – month number

Returns

- **d1** (*str*) – yyyyymmdd for first day of requested month
- **d2** (*str*) – yyyyymmdd for last day of requested month

gnssrefl.download_noaa module

`gnssrefl.download_noaa.download_noaa(station: str, date1: str, date2: str, output: str = None, plt: bool = False, datum: str = 'mllw', subdir: str = None)`

Downloads NOAA tide gauge files and stores locally If you ask for 31 days of data or less, it will download exactly what you ask for. But if you want a longer time series, this code needs to query the NOAA API every month. To make the code easier to write, I start with the first day of the first month you ask for and end with last day in the last month.

Output is written to REFL_CODE/Files/ unless subdir optional input is set Plot is sent to the screen if requested.

Parameters

- **station** (*str*) – 7 character ID of the station.
- **date1** (*str*) – start date. Example value: 20150101
- **date2** (*str*) – end date. Example value: 20150110
- **output** (*string*, *optional*) – Optional output filename default is None
- **plt** (*boolean*, *optional*) – plot comes to the screen default is None
- **datum** (*string*, *optional*) – set to lwd for lakes? default is mllw
- **subdir** (*str*, *optional*) – subdirectory for output in the \$REFL_CODE/Files area

`gnssrefl.download_noaa.multimonthdownload(station, datum, fout, year1, year2, month1, month2, csv)`

downloads NOAA water level measurements > one month

Parameters

- **station** (*str*) – NOAA station name
- **datum** (*str*) – definition of water level datum
- **results** (*fout - fileID for writing*) –
- **year1** (*int*) – year when first measurements will be downloaded
- **month1** (*integer*) – month when first measurements will be downloaded

- **year2** (*integer*) – last year when measurements will be downloaded
- **month2** (*integer*) – last month when measurements will be downloaded
- **csv** (*boolean*) – whether output file is csv format

Returns

- **tt** (*list of times*) – modified julian day
- **obstimes** (*list of datetime objects*)
- **slevel** (*list or is it numpy ??*) – water level in meters

`gnssrefl.download_noaa.noaa2me(date1)`

converts NOAA type of date string to simple integers

Parameters

date1 (*string*) – time in format YYYYMMDD for year month and day

Returns

- **year1** (*integer*) – full year
- **month1** (*integer*) – month
- **day1** (*integer*) – day of the month
- **doy** (*integer*) – day of year
- **modjulday** (*float*) – modified julian date

`gnssrefl.download_noaa.noaa_command(station, fout, year, month1, month2, datum, metadata, tt, obstimes, slevel, csv)`

downloads/writes NOAA tidegauge data for one month

Parameters

- **station** (*str*) – station name
- **year** (*int*) – full year
- **month1** (*int*) – starting month
- **month2** (*int*) – ending month
- **datum** (*str*) – water datum
- **metadata** (*bool*) – whether you want the metadata printed to the screen
- **tt** (*numpy array*) – modified julian date for water measurements
- **obstimes** (*numpy array of datetimes*) – time of the measurements
- **slevel** (*numpy array of floats*) – water level in meters
- **csv** (*bool*) – True if csv output wanted (default is False)

Returns

- **tt** (*numpy array*) – modified julian date for water measurements
- **obstimes** (*numpy array*) – datetime format, updated with new data
- **slevel** (*numpy array*) – sea level (m) updated with new data

`gnssrefl.download_noaa.pickup_from_noaa(station, date1, date2, datum, printmeta)`

pick up NOAA data between date1 and date2, which can be longer than one month (NOAA API restriction)

Parameters

- **station** (*str*) – station name
- **date1** (*str*) – beginning time, 20120101 is January 1, 2012
- **date2** (*str*) – end time , same format
- **datum** (*str*) – what kind of datum is requested
- **printmeta** (*bool*) – print metadata to screen

Returns

- **data** (*dictionary in NOAA format*)
- **error** (*bool*)

`gnssrefl.download_noaa.write_out_data(data, fout, tt, obstimes, slevel, csv)`

writes out the NOAA water level data to a file 20213-mar-27 using new format

Parameters

- **data** (*dictionary from NOAA API*) –
- **fout** (*file ID*) – for output
- **tt** –
- **obstimes** (*list of datetimes*) – times of water level measurements
- **slevel** (*numpy array of floats*) – water level in meters
- **csv** (*boolean*) – whether csv format or not

Returns

- **tt** (*same as input, but larger*)
- **obstimes** (*list of datetimes*) – times for waterlevels
- **slevel** (*list of floats*) – water levels in meters

gnssrefl.download_orbits module

`gnssrefl.download_orbits.download_orbits(orbit: str, year: int, month: int, day: int, doy_end: int = None)`

command line interface for download_orbits. If day is zero, then it is assumed that the month record is day or year

Examples

download_orbits nav 2020 50 0

downloads broadcast orbits for day of year 50 in the year 2020

download_orbits nav 2020 1 1

downloads broadcast orbits for January 1, 2020

download_orbits gnss 2023 1 1

multi-GNSS orbits from GFZ

download_orbits rapid 2023 1 1

rapid multi-GNSS orbits from GFZ

download_orbits rapid 2023 1 0 -doy_end 10

rapid multi-GNSS orbits from GFZ for days of year 1 thru 10 in 2023

Parameters

- **orbit** (*string*) – value options:
 - gps (default) : uses GPS broadcast orbit
 - gps+glo : will use JAXA orbits which have GPS and Glonass (usually available in 48 hours)
 - gnss : will use GFZ orbits, which is multi-GNSS (available in 3-4 days). but taken from CDDIS archive
 - nav : GPS broadcast, adequate for reflectometry. Searches various places
 - nav-sopac : GPS broadcast file from SOPAC, adequate for reflectometry.
 - nav-esa : GPS broadcast file from ESA, adequate for reflectometry.
 - nav-cddis : GPS broadcast file from CDDIS, very slow to download
 - igs : IGS precise, GPS only
 - igr : IGS rapid, GPS only
 - jax : JAXA, GPS + Glonass, within a few days, missing block III GPS satellites
 - gbm : GFZ Potsdam, multi-GNSS, not rapid
 - grg : French group, GPS, Galileo and Glonass, not rapid
 - esa : ESA, multi-GNSS
 - gfr : GFZ rapid, GPS, Galileo and Glonass, since May 17 2021
 - wum : (disabled) Wuhan, multi-GNSS, not rapid
 - gnss2 : multi-GNSS, but uses IGN instead of CDDIS. does not work
 - gnss3 : multi-GNSS, but uses GFZ archive instead of CDDIS. same as gnss-gfz
 - ultra : ultra orbits directly from GFZ
 - rapid : rapid orbits directly from GFZ
- **year** (*integer*) – full year
- **month** (*integer*) – calendar month
- **day** (*integer*) – day of the month
- **doy_end** (*integer*) – optional, allows multiple day download

gnssrefl.download_orbits.main()

gnssrefl.download_orbits.parse_arguments()

gnssrefl.download_psmsl module

`gnssrefl.download_psmsl.download_psmsl(station: str, output: str = None, plt: bool = False)`

Downloads PSMSL tide gauge files created by Simon Williams in json format, converts it to plain txt or csv format

Parameters

- **station** (*str*) – 4 ch station name
- **output** (*str*, *optional*) – Optional output filename default is None
- **plt** (*bool*, *optional*) – plot comes to the screen

gnssrefl.download_rinex module

downloads RINEX files

`gnssrefl.download_rinex.download_rinex(station: str, year: int, month: int, day: int, rate: str = 'low', archive: str = 'all', version: int = 2, strip: bool = False, doy_end: int = None, stream: str = 'R', samplerate: int = 30, screenstats: bool = False, dec: int = 1, save_crx: bool = False)`

Command line interface for downloading RINEX files from global archives. Required inputs are station, year, month, and day. If you want to use day of year, call it as station, year, doy, 0.

decimate does not seem to do anything, at least not for RINEX 2.11 files

bkg option is changed. now must specify bkg-igs or bkg-euref

Examples

download_rinex mfile 2015 1 1

downloads January 1, 2015

download_rinex mfile 2015 52 0

Using day of year instead of month/day:

download_rinex p101 2015 52 0 -archive sopac

checks only sopac archive

Parameters

- **station** (*str*) – 4 or 9 character ID of the station.
- **year** (*int*) – full Year
- **month** (*int*) – month
- **day** (*int*) – day of month
- **rate** (*str*, *optional*) – sample rate. value options:
 - low (default) : standard rate data
 - high : high rate data
- **archive** (*str*, *optional*) – Select which archive to get the files from. Default is redirected to all, as defined below. Value options:

cddis : (NASA)

bev : (Austria Federal Office of Metrology and Surveying)

bkg-igs : igs folder of BKG (German Agency for Cartography and Geodesy)

bkg-euref : Euref folder of BKG (German Agency for Cartography and Geodesy)

bfg : (German Agency for water research, only Rinex 3)

ga : (Geoscience Australia)

gfz : (GFZ)

jp : (Japan)

jeff : Jeff Freymueller

nrcan : (Natural Resources Canada)

ngs : (National Geodetic Survey)

nz : (GNS, New Zealand)

sonel : (?)

sopac : (Scripps Orbit and Permanent Array Center)

special : (reflectometry Rinex 2.11 files maintained by unavco)

unavco : now earthscope

all : (searches unavco, sopac, and sonel in that order)

- **version** (*int*, *optional*) – Version of Rinex file. Default is 2. Value options 2 or 3
- **strip** (*bool*, *optional*) – Whether to strip only SNR observables. Uses teqc or gfzrnrx. Default is False.
- **doy_end** (*int*, *optional*) – End day of year to be downloaded. Default is None. (meaning only a single day using the doy parameter)
- **stream** (*str*, *optional*) – Receiver or stream file, for RINEX3 only Default is ‘R’ but you can set to ‘S’ to get streamed version
- **samplerate** (*int*, *optional*) – Sample rate in seconds for RINEX3 only. Default is 30.
- **screenstats** (*bool*, *optional*) – provides screen output helpful for debugging Default is False
- **dec** (*int*, *optional*) – some highrate file downloads allow decimation. Default is 1 sec, i.e. no decimation
- **save_crx** (*bool*, *option*) – saves crx version for Rinex3 downloads. Otherwise they are deleted.

gnssrefl.download_rinex.main()

gnssrefl.download_rinex.parse_arguments()

gnssrefl.download_teqc module

download a year of teqc logs from unavco can do multiple years as well 2022 september 15, updated to https access

`gnssrefl.download_teqc.download_teqc(station: str, year: int, year_end: int = None)`

Download teqc logs from UNAVCO for one (or more) year.

Parameters

- **station** (*string*) – 4 character ID of the station
- **year** (*integer*) – Year
- **year_end** (*int*, *optional*) – end year.

`gnssrefl.download_teqc.main()`

`gnssrefl.download_teqc.mpfile_unavco(station, year, doy)`

picks up teqc log from unavco if it exists stores it in \$REFL_CODE / year / mp / station directory does not check that directory exists. Assumes you previously ran check_directories from the veg library

Parameters

- **station** (*string*) – four character station name
- **year** (*integer*) –
- **doy** (*integer*) – day of year

`gnssrefl.download_teqc.parse_arguments()`

gnssrefl.download_tides module

`gnssrefl.download_tides.download_tides(station: str, network: str, date1: str = None, date2: str = None, output: str = None, plt: bool = False, datum: str = 'mllw', subdir: str = None)`

Downloads tide gauge data from four different networks (see below)

Output is written to REFL_CODE/Files/ unless subdir optional input is set. Plot is sent to the screen if requested.

Examples

`download_tides 8768094 noaa 20210101 20210131`

NOAA station 876094

`download_tides thul ioc 20210101 20210131`

IOC station thul

`download_tides 5970026 wsv`

WSV station 5970026

`download_tides 10313 psmsl`

PSMSL station 10313 (downloads one file)

Parameters

- **station** (*str*) – station name
- **network** (*str*) – name of tide network. Options:

noaa : US NOAA

ioc : UNESCO

wsv : Germany, Wasserstrassen-und Schifffahrtsverwaltung

psmsl : Permanent Service Mean Sea Level

- **date1** (*str*, *optional*) – start date, 20150101, needed for NOAA/IOC
- **date2** (*str*, *optional*) – end date, 20150110, needed for NOAA/IOC
- **output** (*str*, *optional*) – Optional output filename
- **plt** (*bool*, *optional*) – plot comes to the screen
- **datum** (*str*, *optional*) – NOAA input, default is mllw
- **sensor** (*str*, *optional*) – setting for IOC
- **subdir** (*str*, *optional*) – subdirectory for output in the \$REFL_CODE/Files area

```
gnssrefl.download_tides.main()
```

```
gnssrefl.download_tides.parse_arguments()
```

gnssrefl.download_unr module

```
gnssrefl.download_unr.download_unr(station: str)
```

Command line interface for downloading time series from the University of Nevada Reno website

This code is not actively maintained.

Examples

```
download_unr p041
```

```
download_unr sc02
```

Parameters

station (*str*) – 4 character ID of the station name

```
gnssrefl.download_unr.main()
```

```
gnssrefl.download_unr.parse_arguments()
```

gnssrefl.download_wsv module

```
gnssrefl.download_wsv.download_wsv(station: str, plt: bool = True, output: str = None)
```

Downloads and saves WSV (Germany) tide gauge files

Parameters

- **station** (*str*) – station name
- **plt** (*bool*, *optional*) – plot comes to the screen default is None
- **output** (*str*, *optional*) – output filename which is stored in \$REFL_CODE/Files if not set, it uses station.txt

```
gnssrefl.download_wsv.main()
```

```
gnssrefl.download_wsv.parse_arguments()
```

gnssrefl.filesizes module

```
gnssrefl.filesizes.main()
```

very simple code to pick up all the file sizes for SNR files in a given year only checks for snr66 files

gnssrefl.gnssir_cl module

```
gnssrefl.gnssir_cl.gnssir(station: str, year: int, doy: int, snr: int = 66, plt: bool = False, fr: int = None,
                           ampl: float = None, sat: int = None, doy_end: int = None, year_end: int = None,
                           azim1: int = 0, azim2: int = 360, nooverwrite: bool = False, extension: str = "",
                           compress: bool = False, screenstats: bool = False, delTmax: int = None, e1: float
                           = None, e2: float = None, mmdd: bool = False, gzip: bool = True, dec: int = 1,
                           newarcs: bool = True)
```

gnssir is the main driver for estimating reflector heights. The user is required to have set up an analysis strategy using gnssir_input.

Examples

gnssir p041 2021 15

analyzes the data for station p041, year 2021 and day of year 15.

gnssir p041 2021 15 -snr 99

uses SNR files with a 99 suffix

gnssir p041 2021 15 -plt T

plots of SNR data and periodograms come to the screen. Each frequency gets its own plot.

gnssir p041 2021 15 -screenstats T

sends debugging information to the screen

gnssir p041 2021 15 -nooverwrite T

only runs gnssir if there isn't a previous solution

gnssir p041 2021 15 -extension strategy1

runs gnssir using json file called p041.strategy1.json

gnssir p041 2021 15 -doy_end 20

Analyzes data from day of year 15 to day of year 20

gnssir p041 2021 15 -dec 5

before computing periodograms, decimates the SNR file contents to 5 seconds

gnssir p041 2021 15 -gzip T

gzipts the SNR file after you run the code. Big space saver (now the default)

Parameters

- **station** (*str*) – lowercase 4 character ID of the station
- **year** (*int*) – full Year
- **doy** (*integer*) – Day of year

- **snr** (*int*, *optional*) – SNR format. This tells the code what elevation angles to save data for. Input is the snr file ending. Value options:
 - 66 (default) : saves all data with elevation angles less than 30 degrees
 - 99 : saves all data with elevation angles between 5 and 30 degrees
 - 88 : saves all data
 - 50 : saves all data with elevation angles less than 10 degrees
- **plt** (*bool*, *optional*) – Send plots to screen or not. Default is False.
- **fr** (*int*, *optional*) – GNSS frequency. Value options:
 - 1,2,20,5 : GPS L1, L2, L2C, L5
 - 101,102 : GLONASS L1, L2
 - 201, 205,206,207,208 : GALILEO E1, E5a,E6,E5b,E5
 - 302,306,307 : BEIDOU B1, B3, B2 (not sure we do 307)
- **ampl** (*float*, *optional*) – minimum spectral peak amplitude. default is None
- **sat** (*int*, *optional*) – satellite number to only look at that single satellite. default is None.
- **doy_end** (*int*, *optional*) – end day of year. This is to create a range from doyear to doyear_end of days. If year_end parameter is used - then day_end will end in the day of the year_end. Default is None. (meaning only a single day using the doyear parameter)
- **year_end** (*int*, *optional*) – end year. This is to create a range from year to year_end to get the snr files for more than one year. doyear_end will be for year_end. Default is None.
- **azim1** (*int*, *optional*) – lower limit azimuth. If the azimuth angles are changed in the json (using 'azval' key) and not here, then the json overrides these. If changed here, then it overrides what you requested in the json. default is 0.
- **azim2** (*int*, *optional*) – upper limit azimuth. If the azimuth angles are changed in the json (using 'azval' key) and not changed here, then the json overrides these. If changed here, then it overrides what you requested in the json. default is 360.
- **nooverwrite** (*bool*, *optional*) – Use to overwrite lomb scargle result files or not. Default is False, i.e., it will overwrite.
- **extension** (*string*, *optional*) – extension for result file, useful for testing strategies. default is empty string
- **compress** (*boolean*, *optional*) – xz compress SNR files after use. default is False.
- **screenstats** (*bool*, *optional*) – whether to print stats to the screen or not. default is True.
- **deltmax** (*int*, *optional*) – maximum satellite arc length in minutes. found in the json
- **e1** (*float*, *optional*) – use to override the minimum elevation angle.
- **e2** (*float*, *optional*) – use to override the maximum elevation angle.
- **mmdd** (*boolean*, *optional*) – adds columns in results for month, day, hour, and minute. default is False.
- **gzip** (*boolean*, *optional*) – gzip compress SNR files after use. default is True (as of 2023 Sep 17).
- **dec** (*int*, *optional*) – decimate SNR file to this sampling period before the periodograms are computed. 1 sec is default (i.e. no decimating)

- **newarcs** (*bool*, *optional*) – this input no longer has any meaning

```
gnssrefl.gnssir_cl.main()
```

```
gnssrefl.gnssir_cl.parse_arguments()
```

gnssrefl.gnssir_input module

```
gnssrefl.gnssir_input.main()
```

```
gnssrefl.gnssir_input.make_gnssir_input(station: str, lat: float = 0, lon: float = 0, height: float = 0, e1:
float = 5.0, e2: float = 25.0, h1: float = 0.5, h2: float = 8.0, nr1:
float = None, nr2: float = None, peak2noise: float = 2.8, ampl:
float = 5.0, allfreq: bool = False, l1: bool = False, l2c: bool =
False, xyz: bool = False, refraction: bool = True, extension: str
= "", ediff: float = 2.0, delTmax: float = 75.0, frlist: list = [],
azlist2: list = [0, 360], ellist: list = [], refr_model: int = 1)
```

This new script sets the Lomb Scargle analysis strategy you will use in gnssir. It saves your inputs to a json file which by default is saved in REFL_CODE/<station>.json. This code replaces make_json_input.

This version no longer requires you to have azimuth regions of 90-100 degrees. You can set a single set of azimuths in the command line variable azlist2, i.e. -azlist2 0 270 would accommodate all rising and setting arcs between 0 and 270 degrees. If you have multiple distinct regions, that is also acceptable, i.e. -azlist2 0 150 180 360 would use all azimuths between 0 and 360 except for 150 to 180

Your first azimuth constraint can be negative, i.e. -azlist2 -90 90, is allowed.

Note: you can keep using your old json files - you just need to add this new -azlist2 setting manually.

Latitude, longitude, and height are assumed to be stored in the UNR database. If they are not, you should set them manually.

Example of a json file that has both the old and new ways. The arrays within the json file are called azval and azval2.

https://morefunwithgps.com/public_html/sc02.json

Refraction

originally we had refraction as a boolean, i.e. on or off. This is stored in the json. The code however, uses an integer 1 (for a simple non-time-varying Bennett correction) and integer 0 for no correction. From version 1.8.4 we begin to implement more refraction models. 1 (and Bennett) will continue to be the default. The “1” is written to the LSP results file so that people can keep track easily of whether they are inadvertently mixing files with different strategies. And that is why it is an integer, because all results in the LSP results files are numbers. Going forward, we are adding a time-varying capability.

Model 1: Bennett, static Model 2: Bennett and time-varying Model 3: Ulich, static Model 4: Ulich, time-varying

gnssir_input will have a new parameter for the json output, refr_model. If it is not set, i.e. you have an old json, it is assumed to be 1. You can change it by hand if you like. And you can certainly test out the impact by using -extension option.

Examples

gnssir_input p041

uses only GPS frequencies and all azimuths and the coordinates in the UNR database

gnssir_input p041 -azlist2 0 180 -fr 1 101

uses UNR coordinates, GPS L1 and Glonass L1 frequencies, and azimuths between 0 and 180.

gnssir_input p041 -lat 39.9494 -lon -105.19426 -height 1728.85 -l2c T -e1 5 -e2 15

uses only L2C GPS data between elevation angles of 5 and 15 degrees. user input lat/long/height

gnssir_input p041 -h1 0.5 -h2 10 -e1 5 -e2 25

uses UNR database, only GPS data between elevation angles of 5-25 degrees and reflector heights of 0.5-10 meters

gnssir_input p041 -ediff 1

uses UNR database, only GPS data, default station coordinates, enforces elevation angles to be within 1 degrees of default elevation angle limits (5-25)

gnssir_input sc02 -ellist 5 10 7 12

let's say you want to compute smaller arcs than just a single set of elevation angles. you can use this to set this up, so instead of 5 and 12, you could set it up to do two arcs, one for 5-10 degrees and the other for 7-12. WARNING: you need to pay attention to QC metrics (amplitude and peak2noise). You likely need to lower them since your periodogram for fewer data will be less robust than with the longer elevation angle region.

param station

4 character station ID.

type station

str

param lat

latitude in degrees.

type lat

float, optional

param lon

longitude in degrees.

type lon

float, optional

param height

ellipsoidal height in meters.

type height

float, optional

param e1

elevation angle lower limit in degrees. default is 5.

type e1

float, optional

param e2

elevation angle upper limit in degrees. default is 25.

type e2

float, optional

param h1
reflector height lower limit in meters. default is 0.5.

type h1
float, optional

param h2
reflector height upper limit in meters. default is 8.

type h2
float, optional

param nr1
noise region lower limit for QC in meters. default is None.

type nr1
float, optional

param nr2
noise region upper limit for QC in meters. default is None.

type nr2
float, optional

param peak2noise
peak to noise ratio used for QC. default is 2.7 (just a starting point for water - should be 3 or 3.5 for snow or soil...)

type peak2noise
float, optional

param ampl
spectral peak amplitude for QC. default is 6.0 this is receiver and elevation angle region dependent - so you need to change it based on your site

type ampl
float, optional

param allfreq
True requests all GNSS frequencies. default is False (defaults to use GPS frequencies).

type allfreq
bool, optional

param l1
set to True to use only GPS L1 frequency. default is False.

type l1
bool, optional

param l2c
set to use only GPS L2C frequency. default is False.

type l2c
bool, optional

param xyz
set to True if using Cartesian coordinates instead of Lat/Long/Ht. default is False.

type xyz
bool, optional

param refraction
set to False to turn off refraction correction. default is True.

type refraction

bool, optional

param extension

provide extension name so you can try different strategies. Results will then go into \$REFL_CODE/YYYY/results/ssss/extension Default is ''

type extension

str, optional

param ediff

quality control parameter (Degrees) Allowed min/max elevation angle diff from requested min/max elev angle default is 2

type ediff

float, optional

param delTmax

maximum allowed arc length (minutes) default is 75, which can be a bit long for tides

type delTmax

float, optional

param frlist

avoids all the booleans - if you know the frequencies, enter them. e.g. 1 2 or 1 20 5 or 1 20 101 102

type frlist

list of integers

param azlist2

Default is 0 to 360. list of azimuth limits as subquadrants are no longer required.

type azlist2

list of floats

param ellist

min and max elevation angles to be used with the azimuth regions you listed, i.e. [5 10 6 11 7 12 8 13] would allow overlapping regions - all five degrees long Default is empty list.

type ellist

list of floats

param refr_model

refraction model. we are keeping this as integer as it is written to a file with only numbers in it. 1 is the default simple refraction (just correct elevation angles using standard bending models). 0 is no refraction correction. As we add more models, they will receive their own number.

type refr_model

int

```
gnssrefl.gnssir_input.parse_arguments()
```

gnssrefl.gnssir_old module

`gnssrefl.gnssir_old.apply_refraction_corr(lsp, ele, p, T)`

Parameters

- **lsp** (*dictionary*) – info from make_json_input
- **ele** (*numpy array of floats*) – elevation angles (deg)
- **p** (*float*) – pressure
- **T** (*float*) – temperature (C)

Returns

ele – elevation angle (deg)

Return type

numpy array of floats

`gnssrefl.gnssir_old.gnssir_guts(station, year, doy, snr_type, extension, lsp)`

Computes lomb scargle periodograms for a given station, year, day of year etc.

Parameters

- **station** (*string*) – 4 character station name
- **year** (*integer*) – full year
- **doy** (*integer*) – day of year
- **snr_type** (*integer*) – snr file type
- **extension** (*string*) – optional subdirectory to save results
- **lsp** (*dictionary*) –

e1

[float] min elev angle, deg

e2

[float] max elev angle, deg

NReg

[list of floats] noise region for RH peak2noise , meters

azval

[list of floats] pairs of azimuth regions, i.e. [0 90 90 180]

`gnssrefl.gnssir_old.local_update_plot(x, y, px, pz, ax1, ax2, failure)`

updates result plot

Parameters

- **x** (*numpy array*) – elevation angle (deg)
- **y** (*numpy array*) – SNR (volt/volt)
- **px** (*numpy array*) – reflector height (m)
- **pz** (*numpy array*) – spectral amplitude (volt/volt)
- **ax1** (*matplotlib figure control*) – top plot
- **ax2** (*matplotlib figure control*) – bottom plot
- **failure** (*boolean*) – whether periodogram fails QC

`gnssrefl.gnssir_old.onesat_freq_check(satlist, f)`

for a given satellite name - tries to determine if you have a compatible frequency

Parameters

- **satlist** (*list*) – integer
- **f** (*integer*) – frequency

Returns

satlist – integer

Return type

list

`gnssrefl.gnssir_old.plot2screen(station, f, ax1, ax2, pltname)`

Add axis information and Send the plot to the screen. <https://www.semicolonworld.com/question/57658/matplotlib-adding-an-axes-using-the-same-arguments-as-a-previous-axes>

Parameters

station (*string*) – 4 character station ID

`gnssrefl.gnssir_old.read_json_file(station, extension)`

picks up json instructions for calculation of lomb scargle periodogram

Parameters

- **station** (*str*) – 4 character station name
- **extension** (*str*) – experimental subdirectory - default is “

Returns

lsp

Return type

dictionary

`gnssrefl.gnssir_old.set_refraction_params(station, dmjd, lsp)`

set values used in refraction correction

Parameters

- **station** (*string*) – 4 character station name
- **dmjd** (*float*) – modified julian date
- **lsp** (*dictionary*) –

gnssrefl.gnssir_v2 module

`gnssrefl.gnssir_v2.apply_refraction_corr(lsp, ele, p, T)`

Parameters

- **lsp** (*dictionary*) – info from make_json_input such as station lat and lon
- **ele** (*numpy array of floats*) – elevation angles (deg)
- **p** (*float*) – pressure
- **T** (*float*) – temperature (C)

Returns

ele – elevation angle (deg)

Return type

numpy array of floats

`gnssrefl.gnssir_v2.check_azim_compliance(initA, azlist)`

Check to see if your arc is in one of the requested regions

Parameters

- **initA** (*float*) – azimuth of selected arc (deg)
- **azlist** (*list of floats*) – list of acceptable azimuth regions

Returns**keeparc** – whether the arc is in a selected azimuth range**Return type**

bool

`gnssrefl.gnssir_v2.find_mgnss_satlist(f, year, doy)`

find satellite list for a given frequency and date

Parameters

- **f** (*integer*) – frequency
- **snrExist** (*numpy array*, *bool*) – tells you if a signal is (potentially) legal
- **year** (*int*) – full year
- **doy** (*int*) – day of year

Returns**satlist** – satellites to use**Return type**

numpy list of integers

`gnssrefl.gnssir_v2.gnssir_guts_v2(station, year, doy, snr_type, extension, lsp)`

Computes lomb scargle periodograms for a given station, year, day of year etc.

Arcs are determined differently than in the first version of the code, which was quadrant based. This identifies arcs and applies azimuth constraints after the fact.

2023-aug-02 trying to fix the issue with azimuth print out being different than azimuth at lowest elevation angle

Parameters

- **station** (*string*) – 4 character station name
- **year** (*integer*) – full year
- **doy** (*integer*) – day of year
- **snr_type** (*integer*) – snr file type
- **extension** (*string*) – optional subdirectory to save results
- **lsp** (*dictionary*) –

e1

[float] min elev angle, deg

e2

[float] max elev angle, deg

freqs: list of floats

list of frequencies to use

minH

[float] min reflector height, m

maxH

[float] max reflector height, m

NReg

[list of floats] noise region for RH peak2noise , meters

azval2

[list of floats] new pairs of azimuth regions, i.e. [0 180 270 360]

delTmax

[float] max allowed arc length in minutes

pele: list of floats

min and max elev angle in DC removal

PkNoise

[float] peak to noise value for QC

ediff

[float] elev angle difference for arc length, QC

reqAmp

[float] required periodogram amplitude for QC

ellist: list of floats

added 23jun16, allow multiple elevation angle regions

`gnssrefl.gnssir_v2.local_update_plot(x, y, px, pz, ax1, ax2, failure)`

updates optional result plot for SNR data and Lomb Scargle periodograms

Parameters

- **x** (*numpy array*) – elevation angle (deg)
- **y** (*numpy array*) – SNR (volt/volt)
- **px** (*numpy array*) – reflector height (m)
- **pz** (*numpy array*) – spectral amplitude (volt/volt)
- **ax1** (*matplotlib figure control*) – top plot
- **ax2** (*matplotlib figure control*) – bottom plot
- **failure** (*boolean*) – whether periodogram fails QC

`gnssrefl.gnssir_v2.new_rise_set(elv, azm, dates, e1, e2, ediff, sat, screenstats)`

This provides a list of rising and setting arcs for a given satellite in a SNR file based on using changes in elevation angle

Parameters

- **elv** (*numpy array of floats*) – elevation angles from SNR file
- **azm** (*numpy array of floats*) – azimuth angles from SNR file
- **dates** (*numpy array of floats*) – seconds of the day from SNR file
- **e1** (*float*) – min eval
- **e2** (*float*) – max eval
- **ediff** (*float*) – el angle difference QC

- **sat** (*int*) – satellite number

Returns

tv – beginning and ending indices of the arc satellite number, arc number

Return type

numpy array

`gnssrefl.gnssir_v2.new_rise_set_again(elv, azm, dates, e1, e2, ediff, sat, screenstats)`

This provides a list of rising and setting arcs for a given satellite in a SNR file based on using changes in elevation angle

Parameters

- **elv** (*numpy array of floats*) – elevation angles from SNR file
- **azm** (*numpy array of floats*) – azimuth angles from SNR file
- **dates** (*numpy array of floats*) – seconds of the day from SNR file
- **e1** (*float*) – min elevation angle (deg)
- **e2** (*float*) – max elevation angle (deg)
- **ediff** (*float*) – e1 angle difference required, deg, QC
- **sat** (*int*) – satellite number
- **screenstats** (*bool*) – whether you want info printed to the screen

Returns

tv – beginning and ending indices of the arc satellite number, arc number, elev min, elev max

Return type

numpy array

`gnssrefl.gnssir_v2.onesat_freq_check(satlist, f)`

for a given satellite name - tries to determine if you have a compatible frequency

Parameters

- **satlist** (*list*) – integer
- **f** (*integer*) – frequency

Returns

satlist – integer

Return type

list

`gnssrefl.gnssir_v2.plot2screen(station, f, ax1, ax2, pltname)`

Add axis information and Send the plot to the screen. <https://www.semicolonworld.com/question/57658/matplotlib-adding-an-axes-using-the-same-arguments-as-a-previous-axes>

Parameters

station (*string*) – 4 character station ID

`gnssrefl.gnssir_v2.read_json_file(station, extension)`

picks up json instructions for calculation of lomb scargle periodogram

Parameters

- **station** (*str*) – 4 character station name
- **extension** (*str*) – experimental subdirectory - default is “

Returns**lsp****Return type**

dictionary

`gnssrefl.gnssir_v2.read_snr(obsfile)`

Simple function to load the contents of a SNR file into a numpy array

Parameters**obsfile** (*str*) – name of the snrfile**Returns**

- **allGood** (*int*) – 1, file was successfully loaded, 0 if not. apparently this variable was defined when I did not know about booleans...
- **f** (*numpy array*) – contents of the SNR file
- **r** (*int*) – number of rows in SNR file
- **c** (*int*) – number of columns in SNR file

`gnssrefl.gnssir_v2.rewrite_azel(azval2)`

Trying to allow regions that cross zero degrees azimuth

Parameters**azval2** (*list of floats*) – input azimuth regions**Returns****azelout** – azimuth regions without negative numbers ...**Return type**

list of floats

`gnssrefl.gnssir_v2.set_refraction_params(station, dmjd, lsp)`

set values used in refraction correction

Parameters

- **station** (*string*) – 4 character station name
- **dmjd** (*float*) – modified julian date
- **lsp** (*dictionary with information about the station*) –

lat

[float] latitude, deg

lon

[float] longitude, deg

ht

[float] height, ellipsoidal

Returns

- **p** (*float*) – pressure, hPa
- **T** (*float*) – temperature, Celsius
- **irefr** (*int*) – refraction model number I believe, which is also sent, so not needed
- **e** (*float*) – water vapor pressure, hPa

`gnssrefl.gnssir_v2.window_new(snrD, f, satNu, ncols, pele, pfitV, e1, e2, azlist, screenstats)`

retrieves SNR arcs for a given satellite. returns elevation angle and detrended linear SNR

2023-aug02 updated to improve azimuth calculation reported

Parameters

- **snrD** (*numpy array (multiD)*) – contents of the snr file, i.e. 0 column is satellite numbers, 1 column elevation angle ...
- **f** (*int*) – frequency you want
- **satNu** (*int*) – requested satellite number
- **ncols** (*int*) – how many columns does the SNR file have
- **pele** (*list of floats*) – elevation angles for polynomial fit
- **pfitV** (*float*) – polynomial order
- **e1** (*float*) – requested min elev angle (deg)
- **e2** (*float*) – requested max elev angle (deg)
- **azlist** (*list of floats (deg)*) – non-contiguous azimuth regions, corrected for negative regions
- **screenstats** (*bool*) – whether you want debugging information

Returns

- **x** (*numpy array of floats*) – elevation angle, degrees
- **y** (*numpy array of floats*) – linear SNR with DC removed
- **Nvv** (*int*) – number of points in x/y array
- **cf** (*float*) – scale factor for requested frequency (used in LSP)
- **meanTime** (*float*) – UTC hour of the day (GPS time)
- **avgAzim** (*float*) – average azimuth of the arc (deg) ### this will not be entirely consistent with other metric
- **outFact1** (*float*) – kept for backwards compatibility. set to zero
- **outFact2** (*float*) – edot factor used in RH dot correction
- **delT** (*float*) – arc length in minutes

gnssrefl.gps module

`gnssrefl.gps.LSPresult_name(station, year, doy, extension)`

makes name for the Lomb Scargle output

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **extension** (*str*) – name of subdirectory for results

Returns

- **filepath1** (*str*) – where Lomb Scargle output goes
- **fileexists** (*bool*) – whether output already exists

`gnssrefl.gps.UNR_highrate(station, year, doy)`

picks up the 5 minute time series from UNR website for a given station

Parameters

- **station** (*str*) – 4 character station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year

Returns

- **filename** (*str*) – output filename
- **goodDownload** (*bool*) – whether your download was successful

`gnssrefl.gps.arc_scaleF(f, satNu)`

calculates LSP scale factor cf, the wavelength divided by 2

Parameters

- **f** (*integer*) – satellite frequency
- **satNu** (*integer*) – satellite number (1-400)

Returns

cf – GNSS wavelength/2 (meters)

Return type

float

`gnssrefl.gps.avoid_cddis(year, month, day)`

work around for people that can't use CDDIS ftps this will get multi-GNSS files for GFZ from the IGN hopefully

Parameters

- **year** (*int*) – full year
- **month** (*int*) – month of the year
- **day** (*int*) – calendar day

Returns

- **filename** (*str*) – name of the orbit file
- **fdir** (*str*) – where the orbit file is stored
- **foundit** (*bool*) – whether it was found or not

`gnssrefl.gps.azimuth_angle(RecSat, East, North)`

Given cartesian Receiver-Satellite vectors, and East and North unit vectors, computes azimuth angle

Parameters

- **RecSat** (3-vector) – meters
- **East** (3-vector) – unit vector in east direction
- **North** (3-vector) – unit vector in north direction

Returns

azangle – azimuth angle in degrees

Return type

float

`gnssrefl.gps.back2thefuture(iyear, idoy)`

code checks that this is not a day in the future also rejects data before the year 2000

Parameters

- **iyear** (*int*) – full year
- **idoy** (*int*) – day of year

Returns**badDay** – whether your day exists (yet)**Return type**

bool

`gnssrefl.gps.bfg_data(fstation, year, doy, samplerate=30, debug=False)`

Picks up a RINEX3 file from BFG network

Parameters

- **fstation** (*string*) – 4 char station ID
- **year** (*integer*) – year
- **doy** (*integer*) – day of year
- **samplerate** (*integer*) – sample rate of the receiver (default is 30)
- **debug** (*boolean*) – directory file listing provided if true default is false

`gnssrefl.gps.bfg_password()`

Picks up BFG userid and password that is stored in a pickle file in your REFL_CODE/Files/passwords area If it does not exist, it asks you to input the values and stores them for you.

Returns

- **userid** (*str*) – BFG username
- **password** (*str*) – BFG password

`gnssrefl.gps.big_Disk_in_DC_hourly(station, year, month, day, idtag)`

Picks up a one hour RINEX file from CORS. and gunzips it

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*int*) – full year
- **month** (*int*) – calendar month
- **day** (*integer*) – day of the month. if zero, it means month is really day of year
- **idtag** (*str*) – small case letter from a to x; tells the code which hour it is

`gnssrefl.gps.big_Disk_work_hard(station, year, month, day)`

Attempts to pick up subdaily RINEX 2.11 files from the NGS archive creates a single RINEX file

If day is 0, then month is presumed to be the day of year

Requires teqc

Parameters

- **station** (*str*) – 4 char station name
- **year** (*int*) – year
- **month** (*int*) – month
- **day** (*integer*) – day

`gnssrefl.gps.binary(string)`

changes python string to bytes for use in fortran code using f2py via numpy input is a string, output is bytes with null at the end

`gnssrefl.gps.cdate2nums(coll)`

returns fractional year from ch date, e.g. 2012-02-15 if time is blank, return 3000

Parameters

coll (*str*) – date in yyyy-mm-dd, 2012-02-15

Returns

t – fractional date, year + doy/365.25

Return type

float

`gnssrefl.gps.cdate2ydoys(coll)`

returns year and day of year from character date, e.g. '2012-02-15'

Parameters

coll (*str*) – date in yyyy-mm-dd, 2012-02-15

Returns

- **year** (*int*) – full year
- **doy** (*int*) – day of year

`gnssrefl.gps.cddis_download_2022B(filename, directory)`

Nth iteration of download code for CDDIS

Parameters

- **filename** (*str*) – name of the rinex file or orbit file
- **directory** (*str*) – where the file lives at CDDIS

`gnssrefl.gps.cddis_download_2022B_new(filename, directory)`

download code for CDDIS using https and password

Parameters

- **filename** (*str*) – name of the rinex file or orbit file
- **directory** (*str*) – where the file lives at CDDIS

`gnssrefl.gps.cddis_password()`

Picks up cddis userid and password that is stored in a pickle file in your REFL_CODE/Files/passwords area If it does not exist, it asks you to input the values and stores them for you.

Returns

- **userid** (*str*) – cddis username
- **password** (*str*) – cddis password

`gnssrefl.gps.cddis_restriction(iyear, idoy, archive)`

CDDIS has announced a restructuring of their archive. After 6 months files are tarred. It would be ok for the code to accommodate this change, but it will have to come from the community. If six months has passed since you ran the code, a warning will come to the screen and the code will exit.

updated now that i realize BKG does the same thing

Parameters

- **iyear** (*int*) – year you want to download from CDDIS
- **idoy** (*int*) – day of year you want to download from CDDIS
- **archive** (*str*) – name of archive

Returns

bad_day – if bad_day is true, you cannot access high-rate data from CDDIS or BKG

Return type

bool

`gnssrefl.gps.char_month_converter(month)`

integer month to 3 character month

Parameters

month (*int*) – integer month (1-12)

Returns

month – three char month, uppercase

Return type

str

`gnssrefl.gps.checkEGM()`

Downloads and stores EGM96 file in REFL_CODE/Files for use in refl_zones

Returns

foundfile – whether EGM96 file was found (or installed) on your local machine

Return type

bool

`gnssrefl.gps.checkFiles(station, extension)`

apparently no one consistently checks for the Files directory existence. this is an attempt to fix that.

Parameters

- **station** (*str*) – 4 ch station ID
- **extension** (*str*) – subdirectory for results in \$REFL_CODE/Files/station

`gnssrefl.gps.check_environ_variables()`

Checks to see if you have set the expected environment variables used in gnssrefl

`gnssrefl.gps.check_inputs(station, year, doy, snr_type)`

inputs to Lomb Scargle and Rinex translation codes are checked for sensibility. Returns true or false to code can exit.

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year

- **snr_type** (*int*) – snr file type (e.g. 66)

Returns

exitSys – whether fatal error is trigger by a bad choice

Return type

bool

`gnssrefl.gps.check_navexistence(year, month, day)`

Check to see if you already have the nav file. Uncompresses it if necessary

Parameters

- **year** (*int*) – full year
- **month** (*int*) – month or doy if day is zero
- **day** (*int*) – day of month or 0

Returns

foundit – whether nav file has been found

Return type

boolean

`gnssrefl.gps.confused_obstimes(tvd)`

Parameters

tvd (*numpy array*) – results of LSP results

Returns

modifiedjulian – modified julian date values

Return type

numpy array of floats

`class gnssrefl.gps.constants`

Bases: object

bei_L2 = 1561.098

bei_L5 = 1176.45

bei_L6 = 1268.52

bei_L7 = 1207.14

c = 299792458

fL1 = 1575.42

fL2 = 1227.6

fL5 = 1176.45

gal_L1 = 1575.42

gal_L5 = 1176.45

gal_L6 = 1278.7

gal_L7 = 1207.14

```

gal_L8 = 1191.795
mu = 3986005000000000.0
omegaEarth = 7.2921151467e-05
wL1 = 0.19029367279836487
wL2 = 0.24421021342456825
wL5 = 0.25482804879085386
wbL2 = 0.19203948631027648
wbL5 = 0.25482804879085386
wbL6 = 0.2363324646044209
wbL7 = 0.2483493695843067
wgL1 = 0.19029367279836487
wgL5 = 0.25482804879085386
wgL6 = 0.23445097208101978
wgL7 = 0.2483493695843067
wgL8 = 0.251547000952345

```

`gnssrefl.gps.dec31(year)`

Calculates the day of year for December 31

Parameters

input (*integer*) – year

Returns

doy – day of year for December 31

Return type

integer

`gnssrefl.gps.define_and_xz_snr(station, year, doy, snr)`

finds and checks for existence of a SNR file uncompresses if that is needed (xz or gz)

Parameters

- **station** (*str*) – station name, 4 characters
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **snr** (*int*) – kind of snr file (66,77, 88 etc)

Returns

- **fname** (*str*) – full name of the SNR file
- **fname2** (*str*) – no longer used but kept for backwards capability
- **snre** (*bool*) – whether the file exists or not

`gnssrefl.gps.define_quick_filename(station, year, doy, snr)`

defines SNR File name

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **snr** (*int*) – snr file type (66,88, etc)

Returns

f – SNR filename

Return type

str

`gnssrefl.gps.diffraction_correction(el_deg, temp=20.0, press=1013.25)`

Computes and return the elevation correction for refraction in the atmosphere such that the elevation of the satellite plus the correction is the observed angle of incidence.

Based on an empirical model by G.G. Bennet. This code was provided by Chalmers Group, Joakim Strandberg and Thomas Hobiger Bennett, G. G. The calculation of astronomical refraction in marine navigation. Journal of Navigation 35.02 (1982): 255-259.

Parameters

- **el_deg** (*array_like*) – A vector of true satellite elevations in degrees for which the correction is calculated.
- **temp** (*float, optional*) – Air temperature at ground level in degrees celsius, default 20 C.
- **press** (*float, optional*) – Air pressure at ground level in hPa, default 1013.25 hPa.

Returns

corr_el_deg – The elevation correction in degrees.

Return type

1d-array

`gnssrefl.gps.doy2ymd(year, doy)`

Parameters

- **year** (*int*) –
- **doy** (*int*) – day of year

Returns

d

Return type

datetime object

`gnssrefl.gps.elev_angle(up, RecSat)`

computes satellite elevation angle

Parameters

- **up** (*3 vector float*) – unit vector in the up direction
- **RecSat** (*3 vector numpy*) – Cartesian vector pointing from receiver to satellite in meters

Returns

angle – elevation angle in radians

Return type

float

`gnssrefl.gps.fday2mjd(year, fday)`

calculates modified julian day from year and fractional day of year

Parameters

- **year** (*int*) – full year
- **fday** (*float*) – fractional day of year

Returns

mjd – modified julian day

Return type

float

`gnssrefl.gps.final_gfz_orbits(year, month, day)`

downloads gfz final orbit and stores in \$ORBITS

Parameters

- **year** (*int*) – full year
- **month** (*int*) – month or day of year if day is set to zero
- **day** (*int*) – day of month

Returns

- **littlename** (*str*) – orbit filename, fdir, foundit
- **fdir** (*str*) – directory where the orbit file is stored locally
- **foundit** (*bool*) – whether the file was found

`gnssrefl.gps.findConstell(cc)`

determine constellation integer value

Parameters

cc (*string is one character (from rinex satellite line)*) –

constellation definition:

G : GPS R : Glonass E : Galileo C : Beidou

Returns

out – value added to satellite number for our system, 0 for GPS, 100 for Glonass, 200 for Galileo, 300 for everything else

Return type

integer

`gnssrefl.gps.find_satlist_wdate(f, snrExist, year, doy)`

find satellite list for a given frequency and date

Parameters

- **f** (*integer*) – frequency
- **snrExist** (*numpy array, bool*) – tells you if a signal is (potentially) legal
- **year** (*int*) – full year

- **doy** (*int*) – day of year

Returns

- **satlist** (*numpy list of integers*) – satellites to use
- **june 24, 2021** (*updated for SVN78*)

`gnssrefl.gps.freq_out(x, ofac, hifac)`

Parameters

- **x** (*numpy array*) – sine(elevation angle)
- **ofac** (*float*) – oversampling factor
- **hifac** (*float*) – how far to calculate RH frequencies (in meters)

Returns

pd – frequencies

Return type

float numpy arrays

`gnssrefl.gps.ftitle(freq)`

makes a frequency title for plots

Parameters

freq (*int*) – GNSS frequency

Returns

returnf – nice string for the constellation/frequency for the title of a plot

Return type

str

`gnssrefl.gps.ga_highrate(station9, year, doy, dec, deleteOld=True)`

Attempts to download highrate RINEX from GA

Parameters

- **station9** (*str*) – nine character station name appropriate for rinex 3
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **dec** (*int*) – decimation value. 1 or 0 means no decimation
- **deleteOld** (*bool*) – whether to delete old rinex 3 files

Returns

- **rinex2** (*string*) – rinex2 filename created by merging 96 files!
- **fxist** (*boolean*) – whether a rinex2 file was successfully created

`gnssrefl.gps.gbm_orbits_direct(year, month, day)`

downloads gfz multi-gnss orbits, aka gbm orbits, directly from GFZ. thus avoids CDDIS. it first checks to see if you have the files online. both version of the long name.

Parameters

- **year** (*int*) – full year
- **month** (*int*) – month number or day of year if day is set to zero

- **day** (*int*) – calendar day of month

`gnssrefl.gps.geoidCorrection(lat, lon)`

Calculates the EGM96 geoid correction

Parameters

- **lat** (*float*) – latitude, degrees
- **lon** (*float*) – longitude, degrees

Returns

geoidC – geoid correction in meters

Return type

float

`gnssrefl.gps.getMJD(year, month, day, fract_hour)`

Parameters

- **year** (*int*) –
- **month** (*int*) –
- **day** (*int*) –
- **fract_hour** (*float*) – hour (fractional)

Returns

mjd – modified julian day

Return type

float

`gnssrefl.gps.get_cddis_navfile(navfile, cyyyy, cyy, cdoy)`

Tries to download navigation file from CDDIS Renames it to my convention (auto0010.22n)

Parameters

- **navfile** (*str*) – name of GPS broadcast orbit file
- **cyyyy** (*str*) – 4 char year
- **cyy** (*str*) – 2 char year
- **cdoy** (*str*) – 3 char day of year

Returns

navfile – full path of the stored navigation file

Return type

str

`gnssrefl.gps.get_esa_navfile(cyyyy, cdoy)`

downloads GPS broadcast navigation file from ESA tries both Z and gz compressed

Parameters

- **cyyyy** (*str*) – 4 char year
- **cdoy** (*str*) – 3 char day of year

Returns

fstatus – whether file was found or not

Return type

bool

`gnssrefl.gps.get_noaa_obstimes(t)`

Needs to be fixed for new file structure

Parameters`t` (*list of integers*) – year, month, day, hour, minute, second**Returns**`obstimes`**Return type**

datetime

`gnssrefl.gps.get_noaa_obstimes_plus(t, **kwargs)`

given a list of time tags (y,m,d,h,m,s), it calculates datetime objects and modified julian days

Parameters`t` (*numpy array*) – our water level format where year, month, day, hour, minute, second are in the first columns**Returns**

- `obstimes` (*datetime obj*) – timetags
- `modjulian` (*numpy array of floats*) – modified julian date array

`gnssrefl.gps.get_obstimes(tvd)`

Calculates datetime objects for times associated with LSP results file contents, i.e. the variable created when you read in the results file.

Parameters`tvd` (*numpy array*) – results of LSP results**Returns**`obstimes` – datetime objects**Return type**

numpy array

`gnssrefl.gps.get_obstimes_plus(tvd)`

send a LSP results file, so the variable created when you read in the results file. return obstimes for matplotlib plotting purposes 2022jun10 - added MJD output

See `get_obstimes``gnssrefl.gps.get_ofac_hifac(elevAngles, cf, maxH, desiredPrec)`

Computes two factors - ofac and hifac - that are inputs to the Lomb-Scargle Periodogram code. We follow the terminology and discussion from Press et al. (1992) in their LSP algorithm description.

Parameters

- `elevAngles` (*numpy of floats*) – vector of satellite elevation angles in degrees
- `cf` (*float*) – (L-band wavelength/2) in meters
- `maxH` (*int*) – maximum LSP grid frequency in meters
- `desiredPrec` (*float*) – the LSP frequency grid spacing in meters i.e. how precise you want the LSP reflector height to be estimated

Returns

- **ofac** (*float*) – oversampling factor
- **hifac** (*float*) – high-frequency factor

`gnssrefl.gps.get_orbits_setexe(year, month, day, orbtype, fortran)`

picks up and stores orbits as needed. It also sets executable location for translation (gpsonly vs multignss)

Parameters

- **year** (*int*) – full year
- **month** (*int*) – calendar month
- **day** (*int*) – calendar day
- **orbtype** (*str*) – orbit source, e.g. nav, gps...
- **fortran** (*bool*) – whether you are using fortran code for translation

Returns

- **foundit** (*bool*) – whether orbit file was found
- **f** (*str*) – name of the orbit file
- **orbidir** (*str*) – location of the orbit file
- **snrex** (*str*) – location of SNR executable. only relevant for fortran users

`gnssrefl.gps.get_sopac_navfile(navfile, cyyyy, cyy, cdoy)`

downloads navigation file from SOPAC

Parameters

- **navfile** (*string*) – name of GPS broadcast orbit file
- **cyyyy** (*string*) – 4 char year
- **cyy** (*string*) – 2 char year
- **cdoy** (*string*) – 3 char day of year

Returns

navfile – should be the same name as input. not logical! I have no idea why i did it this way.

Return type

string

`gnssrefl.gps.get_sopac_navfile_cron(yyyy, doy)`

downloads navigation file from SOPAC to be used in a cron job

Parameters

- **yyyy** (*int*) – full year
- **doy** (*int*) – day of year

Returns

filefound – whether file is found

Return type

bool

`gnssrefl.gps.getnavfile(year, month, day)`

picks up nav file and stores it in the ORBITS directory

Parameters

- **year** (*int*) – full year
- **month** (*int*) – if day is zero, the month value is really the day of year
- **day** (*int*) – day of the month

Returns

- **navname** (*string*) – name of navigation file
- **navdir** (*string*) – location of where the nav file should be stored
- **foundit** (*bool*) – whether the file was found

`gnssrefl.gps.getnavfile_archive(year, month, day, archive)`

picks up nav file from a specific archive and stores it in the ORBITS directory

Parameters

- **year** (*integer*) – full year
- **month** (*int*) – calendar month, or day of year
- **day** (*int*) – day of the month, or zero
- **archive** (*str*) – name of the GNSS archive. currently allow sopac and esa

Returns

- **navname** (*str*) – name of navigation file (should always be auto???0.yyn, so unclear to me why it is sent)
- **navdir** (*str*) – location of where the file has been stored
- **foundit** (*bool*) – whether the file was found

`gnssrefl.gps.getseries(site)`

originally from brendan crowell. picks up two UNR time series - stores in subdirectory called tseries input is station name (four character, lower case)

`gnssrefl.gps.getsp3file(year, month, day)`

retrieves IGS sp3 precise orbit file from CDDIS

Parameters

- **year** (*integer*) – full year
- **month** (*integer*) – calendar month
- **day** (*integer*) – calendar day

Returns

- **name** (*str*) – filename for the orbits
- **fdir** (*str*) – directory for the orbits

`gnssrefl.gps.getsp3file_flex(year, month, day, pCtr)`

retrieves sp3files returns the name of the orbit file and its directory from CDDIS only gets the old-style filenames

Parameters

- **year** (*integer*) –
- **month** (*integer*) –
- **day** (*integer*) –

- **pCtr** (*string*) – 3 character orbit processing center

Returns

- **name** (*str*) – filename for the orbits
- **fdir** (*str*) – directory for the orbits
- **fexist** (*bool*) – whether the orbit file was successfully found

`gnssrefl.gps.getsp3file_mgex(year, month, day, pCtr)`

retrieves MGEX sp3 orbit files

Parameters

- **year** (*integer*) –
- **month** (*integer*) –
- **day** (*integer*) –
- **pCtr** (*string*) – name of the orbit center

Returns

- **name** (*str*) – orbit filename
- **fdir** (*str*) – file directory
- **foundit** (*bool*)

`gnssrefl.gps.gfz_version()`

Finds location of the gfzrn executable

Returns

gfzv – name/location of gfzrn executable

Return type

str

`gnssrefl.gps.glonass_channels(f, prn)`

Retrieves appropriate wavelength for a given Glonass satellite

Parameters

- **f** (*int*) – frequency(101 or 102)
- **prn** (*int*) – satellite number

Returns

- **l** (*float*) – wavelength for glonass satellite in meters
- *logic from Simon Williams*

`gnssrefl.gps.gnssSNR_version()`

Finds location of the GNSS to SNR executable

Returns

gpse – location of gnssSNR executable

Return type

str

`gnssrefl.gps.gpsSNR_version()`

Finds location of the gps to SNR executable

Returns

gpse – location of gpsSNR executable

Return type

str

`gnssrefl.gps.hatanaka_version()`

Finds the Hatanaka decompression executable

Returns

hatanakav – name/location of hatanaka executable

Return type

str

`gnssrefl.gps.hatanaka_warning()`

Return type

warning about missing Hatanaka executable

`gnssrefl.gps.highrate_nz(station, year, month, day)`

NO LONGER SUPPORTED picks up a high-rate RINEX 2.11 file from GNS New zealand requires teqc to convert/merge the files

Parameters

- **station** (*str*) – station name
- **year** (*int*) – full year
- **month** (*int*) – month or day of year
- **day** (*int*) – day or zero

`gnssrefl.gps.ign_orbits(filename, directory, year)`

Downloads sp3 files from the IGN archive

Parameters

- **filename** (*str*) – name of the sp3 file
- **directory** (*str*) – location of orbits at the IGN
- **year** (*int*) – full year

Returns

foundit – whether sp3 file was found

Return type

bool

`gnssrefl.gps.ign_rinex3(station9ch, year, doy, srate)`

Downloads a RINEX 3 file from IGN

Parameters

- **station9ch** (*str*) – 9 character station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **srate** (*int*) – sample rate

Returns

fexist – whether file was downloaded

Return type

bool

`gnssrefl.gps.igsname(year, month, day)`

returns the name of an IGS orbit file

Parameters

- **year** (*integer*) – four character year
- **month** (*integer*) –
- **day** (*integer*) –

Returns

- **name** (*str*) – IGS orbit name
- **clockname** (*string*) – COD clockname

`gnssrefl.gps.inout(c3gz)`

Takes a Hatanaka rinex3 file that has been gzipped gunzips it and decompresses it

Parameters

c3gz (*string*) – name of a gzipped hatanaka compressed RINEX 3 filename

Returns

- **translated** (*boolean*) – whether file was successfully translated or not
- **rnex** (*string*) – filename of the uncompressed and de-Hatanaka'ed RINEX file

`gnssrefl.gps.is_it_legal(freq)`

checks whether the frequency list set by the user in gnssir is legal

Parameters

- **freq** (*list of integers*) – frequencies you want to check
- **Returns** –
- ----- –
- **legal** (*bool*) – whether it is legal or not

`gnssrefl.gps.kgpsweek(year, month, day, hour, minute, second)`

Calculates GPS week and GPS second of the week There is another version that works on character string. I think (kgpsweekC)

Examples

`kgpsweek(2023,1,1,0,0,0)`

returns 2243 and 0

Parameters

- **year** (*int*) – full year
- **month** (*int*) – calendar month
- **day** (*int*) – calendar day

- **hour** (*int*) – hour of the Day (gps time)
- **minute** (*int*) – minutes
- **second** (*int*) – seconds

Returns

- **GPS_wk** (*int*) – GPS week
- **GPS_sec_wk** (*int*) – GPS second of the week

`gnssrefl.gps.kgpsweekC(z)`

converts RINEX timetag line into integers/float

Parameters

z (*str*) – timetag from rinex file (YY MM DD MM SS.SSSS)

Returns

- **gpsw** (*integer*) – GPS week
- **gpss** (*integer*) – GPS seconds

`gnssrefl.gps.l2c_l5_list(year, doy)`

Creates a satellite list of L2C and L5 transmitting satellites for a given year/doy

Parameters

- **year** (*int*) – full year
- **doy** (*integer*) – day of year

Returns

- **l2csatlist** (*numpy array (int)*) – satellites possibly transmitting L2C
- **l5satlist** (*numpy array (int)*) – satellites possibly transmitting L5

`gnssrefl.gps.1lh2xyz(lat, lon, height)`

converts llh to Cartesian values

Parameters

- **lat** (*float*) – latitude in degrees
- **lon** (*float*) – longitude in degrees
- **height** (*float*) – ellipsoidal height in meters

Returns

- **x** (*float*) – X coordinate (m)
- **y** (*float*) – Y coordinate (m)
- **z** (*float*) – Z coordinate (m)
- **Ref** (*Decker, B. L., World Geodetic System 1984,*)
- *Defense Mapping Agency Aerospace Center.*
- *modified from matlab version kindly provided by CCAR*

gnssrefl.gps.make_azim_choices(*alist*)

not used yet

Parameters

- **alist** (*list of floats*) – azimuth pairs - must be even number of values, i.e. [amin1, amax1, amin2, amax2]
- **azval** (*list of floats*) – azimuth regions for lomb scargle periodograms

gnssrefl.gps.make_nav_dirs(*yyyy*)

input year and it makes sure output directories are created for orbits

Parameters

yyyy (*int*) – year

gnssrefl.gps.make_snrdir(*year, station*)

makes various directories needed for SNR file/analysis outputs

Parameters

- **year** (*int*) – full year
- **station** (*str*) – 4 ch station name

gnssrefl.gps.mjd(*y, m, d, hour, minute, second*)

calculate the integer part of MJD and the fractional part.

Parameters

- **year** (*int*) – full year
- **month** (*int*) – calendar month
- **day** (*int*) – calendar day
- **hour** (*int*) – hour of day
- **minute** (*int*) – minute of the day
- **second** (*int*) – second of the day

Returns

- **mjd** (*float*) – modified julian day of y-m-d
- **fracDay** (*float*) – fractional day
- **using information from [http](http://infohost.nmt.edu/~shipman/soft/sidereal/ims/web/MJD-fromDatetime.html)** (*//infohost.nmt.edu/~shipman/soft/sidereal/ims/web/MJD-fromDatetime.html*)

gnssrefl.gps.mjd_more(*mmjd*)

This is not working yet.

Parameters

mmjd (*float*) – mod julian date

Returns

- **year** (*int*) – full year
- **mm** (*int*) – month
- **dd** (*int*) – day
- **doy** (*int*) – day of year

`gnssrefl.gps.mjd_to_date(jd)`

<https://gist.github.com/jiffyclub/1294443>

Converts Modified Julian Day to y,m,d

Algorithm from Practical Astronomy with your Calculator or Spreadsheet

4th ed., Duffet-Smith and Zwart, 2011.

Parameters

jd (*float*) – Julian Day

Returns

- **year** (*int*) – Year as integer. Years preceding 1 A.D. should be 0 or negative. The year before 1 A.D. is 0, 10 B.C. is year -9.
- **month** (*int*) – Month as integer, Jan = 1, Feb. = 2, etc.
- **day** (*float*) – Day, may contain fractional part.

`gnssrefl.gps.mjd_to_datetime(mjd)`

Parameters

mjd (*float*) – modified julian date

Returns

dt

Return type

datetime object

`gnssrefl.gps.month_converter(month)`

brendan gave this to me - give it a 3 char month, returns integer

`gnssrefl.gps.more_confused_obstimes(tvd)`

Parameters

tvd (*numpy array of floats*) – lsp results from a loadtxt command

Returns

modifiedjulian – mjd values

Return type

numpy array of floats

`gnssrefl.gps.myfavoritegpsobs()`

returns list of GPS only SNR obs needed for gfzrnz.

`gnssrefl.gps.myfavoriteobs()`

returns list of SNR obs needed for gfzrnz.

`gnssrefl.gps.myfindephem(week, sweek, ephemeris, prn)`

inputs are gps week, seconds of week # ephemerides and PRN number # returns the closest ephemeris block after the epoch # if one does not exist, returns the first one

`gnssrefl.gps.myreadnav(file)`

Parameters

- **file** (*str*) – nav filename
- **blocks** (*output is complicated - broadcast ephemeris*) –

`gnssrefl.gps.myscan(rinexfile)`

stripping the header code came from pyrinex. data are stored into a variable called table columns 0,1,2 are PRN, GPS week, GPS seconds, and observables rows are the different observations. these should be stored properly - this is a kluge

`gnssrefl.gps.nav_name(year, month, day)`

returns the name and location of the navigation file

Parameters

- **year** (*integer*) –
- **month** (*integer*) –
- **day** (*integer*) –

Returns

- **navfilename** (*str*) – name of the navigation file
- **navfiledir** (*str*) – local directory where navigation file will be stored

`gnssrefl.gps.navfile_retrieve(navfile, cyyyy, cyy, cday)`

retrieves navfile from either SOPAC or CDDIS

Parameters

- **navfile** (*str*) – name of the broadcast orbit file
- **cyyyy** (*str*) – 4 character year
- **cyy** (*string*) – 2 character year
- **cday** (*str*) – 3 character day of year

Returns

FileExists – whether the file was found

Return type

bool

`gnssrefl.gps.new_rinex3_rinex2(r3_filename, r2_filename, dec=1, gpsonly=False)`

This code translates a RINEX 3 file into a RINEX 2.11 file. It is assumed that the gfzrn exists and that the RINEX 3 file is Hatanaka uncompressed or compressed.

Parameters

- **r3_filename** (*str*) – RINEX 3 format filename. Either Hatanaka compressed or uncompressed allowed
- **r2_filename** (*str*) – RINEX 2.11 file
- **dec** (*integer*) – decimation factor. If 0 or 1, no decimation is done.
- **gpsonly** (*bool*) – whether you want only GPS signals. Default is false

Returns

fexists – whether the RINEX 2.11 file was created and exists

Return type

bool

`gnssrefl.gps.nextdoy(year, doy)`

given a year/doy returns the subsequent year/doy

Parameters

- **year** (*int*) – day of year
- **doy** (*int*) – day of year

Returns

- **nyear** (*int*) – next year
- **ndoy** (*int*) – next day of year

`gnssrefl.gps.nicerTime(UTCtime)`

Converts fractional time (hours) to HH:MM

Parameters

UTCtime (*float*) – fractional hours of the day

Returns

T – output as HH:MM

Return type

str

`gnssrefl.gps.norm(vect)`

calculates magnitude of a vector

Parameters

vect (*float*) – vector

Returns

nv – norm of vect

Return type

float

`gnssrefl.gps.open_outputfile(station, year, doy, extension)`

opens output file in REFL_CODE/year/results/station/extension directory

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **extension** (*str*) – analysis extension name (for storage of results)

Returns

fileID – I don't know the proper name of this - but what comes out when you open a file so you can keep writing to it

Return type

?

`gnssrefl.gps.open_plot(plt_screen)`

is this used?

simple code to open a figure, called by gnssIR_lomb

`gnssrefl.gps.orbfile_cddis(name, year, secure_file, secure_dir, file2)`

tries to download a file from a directory at CDDIS which it then stores it the year directory (with a given name)

Parameters

- **name** (*str*) – the name of the orbit file you want to download from CDDIS

- **year** (*int*) – full year
- **secure_file** (*str*) – name of the file at CDDIS
- **secure_dir** (*str*) – where the file lives at CDDIS
- **file2** (*str*) – name without the compression???

Returns

- **foundit** (*bool*) – whether the file was found
- *now checks that file size is not zero. allows old file name downloads*

`gnssrefl.gps.prevdoy(year, doy)`

Given year and doy, return previous year and doy

Parameters

- **year** (*int*) – full year
- **doy** (*int*) – day of year

Returns

- **pyear** (*int*) – previous year
- **pdoy** (*int*) – previous day of year

`gnssrefl.gps.print_file_stats(ele, sat, s1, s2, s5, s6, s7, s8, e1, e2)`

inputs

ele

sat

s1

s2

`gnssrefl.gps.propagate(week, sec_of_week, ephem)`

inputs are GPS week, seconds of the week, and the appropriate ephemeris block from the navigation message
returns the x,y,z, coordinates of the satellite and relativity correction (also in meters), so you add, not subtract

`gnssrefl.gps.queryUNR_modern(station)`

Queries the UNR database for station coordinates that has been stored in sql. downloads it if necessary

Parameters

station (*str*) – 4 character station name

Returns

- **lat** (*float*) – latitude in degrees (zero if not found)
- **lon** (*float*) – longitude in degrees (zero if not found)
- **ht** (*float*) – ellipsoidal ht in meters (zero if not found)

`gnssrefl.gps.quick_plot(plt_screen, gj, station, pltname, f)`

inputs plt_screen variable (1 means go ahead) and integer variable gj which if > 0 there is something to plot also
station name for the title pltname is png filename, if requested

`gnssrefl.gps.quickazel(gweek, gpss, sat, recv, ephemdata, localup, East, North)`

assumes you have read in the broadcast ephemeris, know where your receiver is and the time (gps week, second of week)

`gnssrefl.gps.quickp(station, t, sealevel)`

makes a quick plot of sea level prints the plot to the screen - it does not save it.

Parameters

- **station** (*str*) – station name
- **t** (*numpy array in datetime format*) – time of the sea level observations UTC
- **sealevel** (*list of floats*) – meters (unknown datum)

`gnssrefl.gps.rapid_gfz_orbits(year, month, day)`

downloads gfz rapid orbit and stores in \$ORBITS locally

Parameters

- **year** (*int*) – full year
- **month** (*int*) – month or day of year if day is set to zero
- **day** (*int*) – day of month

Returns

- **littlename** (*str*) – name of the orbit file
- **fdir** (*str*) – name of the file directory where orbit is stored
- **foundit** (*bool*) – whether file was found

`gnssrefl.gps.read_files(year, month, day, station)`

`gnssrefl.gps.read_leapsecond_file(mjd)`

reads leap second file and tries to figure out the UTC-GPS time offset needed for NMEA file users for the given MJD value

It will download and store the leap second file in REFL_CODE/Files if you don't already have it.

Parameters

mjd (*float*) – Modified Julian Day for when you want to know the leap seconds since GPS began

Returns

offset – UTC-GPS time offset in seconds. This should be added to UTC to get GPS

Return type

int

`gnssrefl.gps.read_simon_williams(filename, outfilename)`

Reads a PSMSL file and creates a new file in the standard format I use for tide gauge data in gnssrefl

Parameters

- **filename** (*str*) – datafile of GNSS based water level measurements from the archive at PSMSL created by Simon Williams
- **outfilename** (*str*) – where the rewritten data will go

Returns

- **outobstimes** (*datetime array*) – time of observations
- **outmjd** (*numpy array of floats*) – modified julian day
- **outsealevel** (*numpy array of floats*) – sea level, meters
- **prn** (*numpy array of integers*) – satellite numbers

- **fr** (*numpy array of integers*) – frequency
- **az** (*numpy array of floats*) – azimuth (degrees)

`gnssrefl.gps.read_sp3(file)`

borrowed from Ryan Hardy, who got it from David Wiese ...

`gnssrefl.gps.read_sp3file(file_path)`

input: `file_path` is the `sp3` file name this code is from Joakim Strandberg I believe. It is for the python only version of the translator, which should be deprecated

Returns

- **sp3** (*ndarray*)
- *columns are satnum, gpsweek, gps_sow, x,y,z*
- *x,y,z are in meters*
- *satnum has 0, 100, 200, 300 added for gps, glonass, galileo, beidou,*
- *respectively. all other satellites are ignored*

`gnssrefl.gps.removeDC(dat, satNu, sat, ele, pele, azi, az1, az2, edot, seconds)`

remove direct signal using given elevation angle (`pele`) and azimuth (`az1,az2`) constraints, return `x,y` as primary used data and windowed azimuth, time, and `edot` removed zero points, which 10^0 have value 1. used 5 to be sure?

Parameters

- **dat** (*numpy array of floats*) – SNR data
- **satNu** (*float*) – requested satellite number
- **sat** (*numpy array of floats*) – satellite numbers
- **ele** (*numpy array of floats*) – elevation angles, deg
- **pele** (*list of floats*) – min and max elevation angles (deg)
- **azi** (*numpy array of floats*) – azimuth angle, deg
- **az1** (*float*) – minimum azimuth angle (deg)
- **az2** (*float*) – maximum azimuth angle (deg)
- **edot** (*numpy array of floats*) – derivative elevation angle (deg/sec)
- **seconds** (*numpy array of floatas*) – seconds of the day

Returns

- **x** (*numpy array of floats*) – sine of elevation angle (i believed)
- **y** (*numpy array of floats*) – SNR data in lineer units with DC component removed
- **sat** (??) – not sure why this is sent and returned
- **azi** (*numpy array of flaots*) – azimuth angles
- **seconds** (*numpy array of flaots*) – seconds of the day
- **edot** (*numpy array of floats*) – derivative of elevation angle

`gnssrefl.gps.result_directories(station, year, extension)`

Creates directories for results

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*int*) – full year
- **extension** (*str*) – subdirectory for results (used for analysis strategy)

`gnssrefl.gps.rewrite_UNR_highrate(fname, station, year, doy)`

takes a filename from was already retrieved? from UNReno, reads it, rewrites as all numbers for other uses. no header, but year, month, day, day of year, seconds vertical, east, north the latter three are in meters stores in \$REFL_CODE/yyyy/pos/station

`gnssrefl.gps.rewrite_tseries(station)`

given a station name, look at a daily blewitt position (ENV) file and write a new file that is more human friendly

Parameters

station (*str*) – 4 character station name

`gnssrefl.gps.rewrite_tseries_igs(station)`

given a station name, look at a daily blewitt position (ENV) file and write a new file that is less insane to understand

`gnssrefl.gps.rewrite_tseries_wrapids(station)`

given a station name, look at a daily blewitt position (ENV) file and write a new file that is less insane to understand

`gnssrefl.gps.rinex3_nav(year, month, day)`

not sure what this does!

`gnssrefl.gps.rinex_ga_highrate(station, year, month, day)`

no longer supported -

Parameters

- **station** (*str*) – 4 character station ID, lowercase
- **year** (*int*) – full year
- **month** (*int*) – calendar month
- **day** (*integer*) – day of the month

`gnssrefl.gps.rinex_jp(station, year, month, day)`

Picks up RINEX file from Japanese GSI GeoNet archive URL : <https://www.gsi.go.jp/ENGLISH/index.html>

Parameters

- **station** (*str*) – station name
- **year** (*int*) – full year
- **month** (*int*) – month or day of year
- **day** (*int*) – day of month or zero

`gnssrefl.gps.rinex_name(station, year, month, day)`

Defines rinex 2.11 file name

Parameters

- **station** (*str*) – 4 character station ID
- **year** (*int*) – full year
- **month** (*int*) –
- **day** (*int*) –

Returns

- **fnameo** (*str*) – RINEX 2.11 name
- **fnamed** – RINEX 2.11 name, Hatanaka compressed

`gnssrefl.gps.rinex_nrcan_highrate(station, year, month, day)`

picks up 1-Hz RINEX 2.11 files from NRCAN requires `gfzrn` or `teqc` to merge the 15 minute files

Parameters

- **station** (*string*) – 4 character station name
- **year** (*integer*) – year
- **month** (*integer*) – month or day of year if day is set to zero
- **day** (*integer*) – day

`gnssrefl.gps.rinex_unavco(station, year, month, day)`

This is being used by the vegetation code picks up a RINEX 2.11 file from unavco low-rate area requires Hatanaka code

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*integer*) – full year
- **month** (*integer*) – month or day of year
- **day** (*integer*) – day of month or zero

`gnssrefl.gps.rinex_unavco_highrate(station, year, month, day)`

picks up a 1-Hz RINEX 2.11 file from unavco.

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*int*) –
- **month** (*intr*) –
- **day** (*int*) –

`gnssrefl.gps.rot3(vector, angle)`

Parameters

- **vector** (*3 vector*) – float
- **angle** (*float*) – radians

Returns

vector2 – float, original vector rotated by angle

Return type

3 vector

`gnssrefl.gps.save_plot(plotname)`

save plot and send location info to the screen

Parameters

plotname (*str*) – name of output figure file

`gnssrefl.gps.set_subdir(subdir)`

make sure that subdirectory exists for output files should return the directory name ...

Parameters

subdir (*str*) – subdirectory in \$REFL_CODE/Files

`gnssrefl.gps.snr_exist(station, year, doy, snrEnd)`

check to see if the SNR file already exists uncompresses if necessary (gz or xz)

Parameters

- **station** (*str*) – four character station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **snrEnd** (*str*) – 2 character snr type, i.e. 66, 99

Returns

snre – whether SNR file exists.

Return type

boolean

`gnssrefl.gps.snr_name(station, year, month, day, option)`

Defines SNR filename

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*int*) –
- **month** (*int*) –
- **day** (*int*) –
- **option** (*int*) – snr filename delimiter, i.e. 66

Returns

fname – snr filename

Return type

string

`gnssrefl.gps.sp3_name(year, month, day, pCtr)`

defines old-style sp3 name

Parameters

- **year** (*int*) –
- **month** (*int*) –
- **day** (*int*) –
- **pCtr** (*str*) – Orbit processing center

Returns

- **sp3name** (*str*) – old-style (lowercase) IGS name for sp3 file
- **sp3dir** (*str*) – where file is stored locally

`gnssrefl.gps.store_orbitfile(filename, year, orbtype)`

Stores orbit files locally

Parameters

- **filename** (*str*) – orbit filename
- **year** (*int*) – full year
- **orbtype** (*str*) – kind of orbit (nav or sp3)

Returns

xdir – local directory where the orbit belongs

Return type

str

`gnssrefl.gps.store_snrfile(filename, year, station)`

move an snr file to the right place

Parameters

- **filename** (*str*) – name of SNR file
- **year** (*int*) – full year
- **station** (*str*) – 4 ch station name

`gnssrefl.gps.strip_compute(x, y, cf, maxH, desiredP, pfitV, minH)`

strips snr data

Parameters

- **x** (*numpy array*) – elevation angles in degrees
- **y** (*numpy array*) – SNR data
- **cf** (*float*) – scale factor for given frequency
- **maxH** (*float*) – maximum reflector height in meters
- **desiredP** (*float*) – precision of Lomb Scargle in meters
- **pfitV** (*integer*) – polynomial order for DC model
- **minH** (*float*) – minimum reflector height in meters

Returns

- **maxF** (*float*) – maximum Reflector height (meters)
- **maxAmp** (*float*) – amplitude of periodogram
- **eminObs** (*float*) – minimum observed elevation angle in degrees
- **emaxObs** (*float*) – maximum observed elevation angle in degrees
- **riseSet** (*integer*) – 1 for rise and -1 for set
- **px** (*numpy array*) – periodogram, x-axis, RH, meters
- **pz** (*numpy array*) – periodogram, y-axis, volts/volts

`gnssrefl.gps.teqc_version()`

Finds location of the teqc executable

Returns

gpse – location of teqc executable

Return type

str

`gnssrefl.gps.translate_dates(year, month, day)`

i do not think this is used

`gnssrefl.gps.ultra_gfz_orbits(year, month, day, hour)`

downloads rapid GFZ sp3 file and stores them in \$ORBITS

Parameters

- **year** (*int*) – full year
- **month** (*int*) – month or day of year
- **day** (*int*) – day or if set to 0, then month is really day of year
- **hour** (*int*) – hour of the day

Returns

- **littlename** (*str*) – name of the orbit file
- **fdir** (*str*) – name of the file directory where orbit is stored
- **foundit** (*bool*) – whether file was found

`gnssrefl.gps.up(lat, lon)`

returns the up unit vector, and local east and north unit vectors needed for azimuth calc.

Parameters

- **latitude** (*float*) – radians
- **longitude** (*float*) – radians

Returns

- **East** (*three vector*) – local transformation unit vector
- **North** (*three vector*) – local transformation unit vector

`gnssrefl.gps.update_plot(plt_screen, x, y, px, pz)`

is this used?

plt_screen

[int] 1 means update the plot

x

[numpy array of floats] elevation angles (deg)

y

[numpy array of floats] SNR data, volts/volts

px

[numpy array of floats] periodogram, x-axis (meters)

pz

[numpy array of floats] periodogram, y-axis

`gnssrefl.gps.update_quick_plot(station, f)`

updates plot in quickLook

Parameters

- **station** (*str*) – 4 ch name
- **f** (*int*) – frequency

`gnssrefl.gps.warn_and_exit(snrexex, fortran)`

if the GNSS/GPS to SNR executable does not exist, exit

Parameters

- **snrexex** (*str*) – name of the executable
- **fortran** (*bool*) – whether fortran is being used for translation

`class gnssrefl.gps.wgs84`

Bases: object

wgs84 parameters for Earth radius and flattening

a = 6378137.0

e = 0.08181919084262149

f = 0.0033528106647474805

`gnssrefl.gps.window_data(s1, s2, s5, s6, s7, s8, sat, ele, azi, seconds, edot, f, az1, az2, e1, e2, satNu, pfitV, pele, screenstats)`

window the SNR data for a given satellite azimuth and elevation angle range

also calculates the scale factor for various GNSS frequencies. currently returns meanTime in UTC hours and mean azimuth in degrees cf, which is the wavelength/2 currently works for GPS, GLONASS, GALILEO, and Beidou new: pele are the elevation angle limits for the polynomial fit. these are applied before you start windowing the data

Parameters

- **s1** (*numpy array*) – SNR L1 data, floats
- **s2** (*numpy array*) – SNR L2 data, floats
- **s5** (*numpy array*) – SNR L5 data
- **s6** (*numpy array floats*) – SNR L6 data
- **s7** (*numpy array floats*) – SNR L7 data
- **s8** (*numpy array floats*) – SNR L8 data
- **sat** (*numpy array*) – satellite number
- **ele** (*numpy array*) – elevation angle (Degrees)
- **azi** (*numpy array*) – azimuth angle (Degrees)
- **seconds** (*numpy array*) – seconds of the day (GPS time)
- **edot** (*numpy array*) – elev angle time rate of change (units?)
- **f** (*int*) – requested frequency
- **az1** (*float*) – minimum azimuth limit, degrees
- **az2** (*float*) – maximum azimuth limit, degrees

- **e1** (*float*) – minimum elevation angle limit, degrees
- **e2** (*float*) – maximum elevation angle limit, degrees
- **satNu** (*int*) – requested satellite number
- **pfitV** (*int*) – polynomial order for DC fit
- **screenstats** (*bool*) – Whether statistics come to the screen

Returns

- **x** (*numpy array of floats*) – elevation angle, deg
- **y** (*numpy array of floats*) – SNR, db-Hz
- **Nvv** (*int*) – number of points in x
- **cf** (*float*) – refl scale factor ($\lambda/2$)
- **meanTime** (*float*) – UTC hour of the arc
- **avgAzim** (*float*) – average azimuth of the track (degrees)
- **outFact1** (*float*) – $\tan(\text{elev})/\text{elevdot}$, hours, from SNR file
- **outFact2** (*float*) – $\tan(\text{elev})/\text{elevdot}$, hours, from linear fit
- **delT** (*float*) – track length in minutes

`gnssrefl.gps.write_QC_fails(delT, delTmax, eminObs, emaxObs, e1, e2, ediff, maxAmp, Noise, PkNoise, reqamp, tooclose2edge)`

prints out various QC fails to the screen

Parameters

- **delT** (*float*) – how long the satellite arc is (minutes)
- **delTmax** (*float*) – max satellite arc allowed (minutes)
- **eminObs** (*float*) – minimum observed elev angle (Deg)
- **emaxObs** (*float*) – maximum observed elev angle (Deg)
- **e1** (*float*) – minimum allowed elev angle (deg)
- **e2** (*float*) – maximum allowed elev angle (deg)
- **ediff** (*float*) – allowed min/max elevation diff from obs min/max elev angle (deg)
- **maxAmp** (*float*) – measured peak LSP
- **Noise** (*float*) – measured noise value for the periodogram
- **PkNoise** (*float*) – required peak to noise
- **reqamp** (*float*) – require peak LSP
- **tooclose2edge** (*bool*) – whether peak value is too close to beginning or ending of the RH constraints

`gnssrefl.gps.xyz2llh(xyz, tol)`

Computes latitude, longitude and height from XYZ (meters)

Parameters

- **xyz** (*list or np array*) – X,Y,Z in meters
- **tol** (*float*) – tolerance in meters for the calculation (1E-8 is good enough)

Returns

- **lat** (*float*) – latitude in radians
- **lon** (*float*) – longitude in radians
- **h** (*float*) – ellipsoidal height in WGS84 in meters

`gnssrefl.gps.xyz2llhd(xyz)`

Converts cartesian coordinates to latitude,longitude,height

Parameters

xyz (*three vector of floats*) – Cartesian position in meters

Returns

- **lat** (*float*) – latitude in degrees
- **lon** (*float*) – longitude in degrees
- **h** (*float*) – ellipsoidal height in WGS84 in meters

`gnssrefl.gps.ydoy2useful(year, doy)`

Calculates various dates

Parameters

- **year** (*int*) – full year
- **doy** (*int*) – day of year

Returns

- **year** (*int*) – full year
- **month** (*int*) – calendar month
- **day** (*integer*) – calendar day
- **yyyy** (*str*) – four character year
- **cdoy** (*str*) – three character day of year
- **YMD** (*str*) – date as in ‘19-12-01’ for December 1, 2019

`gnssrefl.gps.ydoy2ymd(year, doy)`

inputs: year and day of year (doy) returns: year, month, day

`gnssrefl.gps.ydoych(year, doy)`

Converts year and doy to various character strings (two char year, 4 char year, 3 char day of year)

Parameters

- **year** (*int*) – full year
- **doy** (*int*) – day of year

Returns

- **yyyy** (*str*) – 4 character year
- **cyy** (*str*) – 2 character year
- **cdoy** (*str*) – 3 character day of year

`gnssrefl.gps.ymd2ch(year, month, day)`

returns doy and character versions of year,month,day if day is zero, it assumes doy is in the month input

Parameters

- **year** (*int*) – full year
- **month** (*int*) – if day is zero this is day of year
- **day** (*int*) – day of month or zero

Returns

- **month** (*int*) – numerical month of the year
- **day** (*int*) – day of the month
- **doy** (*int*) – day of year
- **yyyy** (*str*) – 4 ch year
- **cyy** (*str*) – 2 ch year
- **cdoy** (*str*) – 4 ch year

`gnssrefl.gps.ymd2doy(year, month, day)`

Calculates day of year and other date strings

Parameters

- **year** (*integer*) – full year
- **month** (*integer*) – month
- **day** (*integer*) – day of the month

Returns

- **doy** (*int*) – day of year
- **cdoy** (*str*) – three character day of year
- **yyyy** (*str*) – four character year
- **cyy** (*str*) – two character year

`gnssrefl.gps.ymd_hhmmss(year, doy, utc, dtime)`

translates year, day of year and UTC hours into various other time parameters

Parameters

- **year** (*int*) – full year
- **doy** (*int*) – full year
- **UTC** (*float*) – fractional hours
- **dtime** (*bool*) – whether you want datetime object

Returns

- **bigT** (*datetime object*)
- **year** (*int*) – full year
- **month** (*int*) – calendar month
- **day** (*int*) – calendar day
- **hour** (*int*) – hour of the day

- **minute** (*int*) – minutes of the day
- **second** (*int*) – seconds

`gnssrefl.gps.zenithdelay(h)`

a very simple zenith troposphere delay in meters this is NOT to be used for precise geodetic applications

Parameters

h (*float*) – ellipsoidal (height) in meters

Returns

zd – simple zenith delay for the troposphere in meters

Return type

float

gnssrefl.gpsweek module

`gnssrefl.gpsweek.main()`

Calculates GPS week information and prints it to the screen

Parameters

- **year** (*integer*) – full year
- **month** (*integer*) – calendar month
- **day** (*integer*) – day of the month

Returns

- **wk** (*int*) – GPS week
- **dayofthewk** (*int*) – day of the week (from 0-6) used by the IGS and others for orbit filenames

gnssrefl.highrate module

`gnssrefl.highrate.bkg_highrate(station, year, month, day, stream, dec_rate, bkg)`

picks up a highrate RINEX 3 file from BKG, merges and decimates it. requires gfzrnX

Parameters

- **inputs** (*string*) – 9 ch station name
- **year** (*integer*) – full year
- **month** (*integer*) – month or day of year if day set to 0
- **day** (*integer*) – day of the month
- **stream** (*str*) – R or S
- **dec_rate** (*integer*) – decimation rate in seconds
- **bkg** (*str*) – file directory at BKG

Returns

- **file_name24** (*str*) – name of merged rinex file
- **fexist** (*boolean*) – whether file exists

`gnssrefl.highrate.cddis_highrate(station, year, month, day, stream, dec_rate)`

picks up highrate RINEX files from CDDIS and merges them

Parameters

- **station** (*str*) – 4 char or 9 char station name Rinex 2.11 for the first and rinex 3 for the latter
- **year** (*int*) – full year
- **month** (*int*) – calendar month
- **day** (*int*) – calendar day
- **stream** (*str*) – rinex3 ID, S or R
- **dec_rate** (*int*) – decimation rate, seconds

Returns

- **rinexname** (*str*) – name of the merged/uncompressed outputfile
- **fxist** (*bool*) – whether the Rinex file was successfully retrieved
- *requires hatanaka code and gfzrn*

`gnssrefl.highrate.variableArchives(station, year, doy, cyyyy, cyy, cdoy, chh, cmm)`

creates rinex3 compliant file names and finds executables needed to manipulate those files

Parameters

- **station** (*str*) – 9 ch station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **cyyyy** (*str*) – 4 ch year
- **cyy** (*str*) – two ch year
- **cdoy** (*str*) – 3 ch day of year
- **chh** (*str*) – 2 ch hour
- **cmm** (*str*) – 2 ch minutes

Returns

- **file_name** (*str*) – first filename to look for
- **crnx_name** (*str*) – first hatanaka name
- **file_name2** (*str*) – second filename to look for
- **crnx_name2** (*str*) – second hatanaka compressed name
- **exe1** (*str*) – uncompression executable to use for file_name
- **exe2** (*str*) – uncompression executable to use for file_name2

gnssrefl.installexe_cl module

`gnssrefl.installexe_cl.checkexist(exe)`

check to see if an executable exists

Parameters

exe (*str*) – executable name to check

`gnssrefl.installexe_cl.download_chmod_move(url, savename, exedir)`

download an executable, chmod it, and store it locally

Parameters

- **url** (*string*) – external location of the executable
- **savename** (*string*) – name of the executable
- **exedir** (*string*) – name of local executable directory (EXE environment variable)

`gnssrefl.installexe_cl.installexe(opsys: str)`

Command line interface to install non-python executables, specifically CRX2RNX and gfzrnx.

<https://stackoverflow.com/questions/12791997/how-do-you-do-a-simple-chmod-x-from-within-python>

Parameters

opsys (*string*) – operating system. Allowed values are linux64, macos, and mac-newchip PC users should use the docker, where these executables come pre-installed

`gnssrefl.installexe_cl.main()`

command line code that downloads helper GNSS codes: Hatanaka and gfzrnx

Parameters

opsys (*string*) – operating system. Allowed values are linux64, macos, and mac-newchip PC users should use the docker, where these executables come pre-installed

`gnssrefl.installexe_cl.newchip_gfzrnx(exedir)`

installs the gfzrnx executable and stores in the EXE directory

Parameters

exedir (*str*) – location of the executable directory

`gnssrefl.installexe_cl.newchip_hatanaka(exedir)`

compiles hatanaka code if an existing executable is not there stores in EXE directory

Parameters

exedir (*str*) – location of the executable directory

`gnssrefl.installexe_cl.parse_arguments()`

gnssrefl.invsnr_cl module

`gnssrefl.invsnr_cl.invsnr(station: str, year: int, doy: int, signal: str, pktlim: float = 2.5, constel: str = None, screenstats: bool = False, tempres: int = 1, polydeg: int = 2, snrfit: bool = True, plt: bool = True, doy_end: int = None, lspfigs: bool = False, snrfigs: bool = False, knot_space: int = 3, rough_in: float = 0.1, risky: bool = False, snr_ending: int = 66, outfile_type: str = 'txt', outfile_name: str = '', outlier_limit: float = 0.5, no_dots: bool = False, delta_out: int = 300, refraction: bool = True, json_override: bool = False)`

You must have run `invsnr_input` before using this code. This is the wrapper code that does the `invsnr` modelling. Note: `outfile_name` and `outfile_type` are unnecessary. Consolidate them.

In an earlier version of the code the `pk2nlim` was set to 4. Later the definition of the metric was changed, and this made the default setting far too stringent. In short, no arcs were being found. As of 2023/10/28 it is set to 2.5. This may not be optimal, but it is not as bad as 4. Please set it yourself as you prefer. Note: it will not be the same as `gnssir` as this code was written separately and for a different purpose.

Examples

`invsnr sc02 2023 15 L1+L2+L5`

would analyze day of year 15 and the L1, L2, and L5 signals

`invsnr sc02 2023 15 ALL`

would analyze day of year 15 and all signals

`invsnr sc02 2023 15 L1+L2`

would analyze day of year 15 and just L1 and L2

`invsnr sc02 2023 15 L1+L2 -pk2nlim 2`

would analyze day of year 15 and just L1 and L2, lower peak to noise limit ratio

`invsnr sc02 2023 15 L1+L2 -doy_end 18`

would analyze day of years 15 through 18 and L1 and L2 signals

Parameters

- **`station`** (*str*) – four character ID
- **`year`** (*int*) – Year
- **`doy`** (*int*) – Day of year
- **`signal`** (*str*) – signal to use, L1 L2 L5 L6 L7 L1+L2 L1+L2+L5 L1+L5 ALL
- **`pktnlim`** (*float*, *optional*) – Peak2noise ratio limit for Quality Control. Default is 2.5
- **`constel`** (*str*, *optional*) – Only a single constellation. Default is `gps`, `glonass`, and `galileo`. value options:
 - G : GPS
 - E : Galileo
 - R : Glonass
 - C : Beidou`withBeidou` : adds Beidou to the default.
- **`screenstats`** (*bool*, *optional*) – Whether to print out stats to the screen. Default is `False`
- **`tempres`** (*int*, *optional*) – SNR file decimator (seconds) Default is 1 (everything)
- **`polydeg`** (*integer*, *optional*) – polynomial degree for direct signal removal Default is 2
- **`snrfit`** (*bool*, *optional*) – Whether to do the inversion or not Default is `True`
- **`plt`** (*bool*, *optional*) – Whether to plot to the screen or not Default is `True`
- **`doy_end`** (*int*, *optional*) – day of year to end analysis. Default is `None`.

- **lspfigs** (*bool, optional*) – Whether or not to make LSP plots Note: Don't turn these on unless you really need plots because it is slow to make one per satellite arc. Default is False
- **snrfigs** (*boolean, optional*) – Whether or not to make SNR plots Don't turn these on unless you really need plots because it is slow to make one per satellite arc. Default is False
- **knot_space** (*float, optional*) – Knot spacing in hours Default is 3
- **rough_in** (*float, optional*) – Roughness Default is 0.1
- **risky** (*bool, optional*) – Risky taker related to gaps/knot spacing Default is False
- **snr_ending** (*int, optional*) – SNR file ending. Default is 66
- **outfile_type** (*string, optional*) – output file type, txt or csv Default is txt
- **outfile_name** (*string, optional*) – output file name. Default is ??
- **outlier_limit** (*float, optional*) – Outliers plotted. (meters) Default is 0.5
- **no_dots** (*bool, optional*) – To plot lombscargle or not. Default is False
- **delta_out** (*int, optional*) – Output increment, in seconds. Default is 300
- **refraction** (*bool, optional*) – Default is True
- **json_override** (*bool, optional*) – Override json file name Default is False

```
gnssrefl.invsnr_cl.main()
```

```
gnssrefl.invsnr_cl.parse_arguments()
```

gnssrefl.invsnr_input module

```
gnssrefl.invsnr_input.invsnr_input(station: str, h1: float = 1, h2: float = 8, e1: float = 5, e2: float = 15,
                                   azimuth1: float = 0, azimuth2: float = 360, lat: float = None, lon: float =
                                   None, height: float = None)
```

Sets some of the analysis parameters for invsnr. Values are stored in a json in \$REFL_CODE/input Note: this code was written independently of gnssrefl. The Quality Control parameters are thus quite different from how gnssrefl is done. The LSP RH retrievals are not - and should not - be the same.

Examples

```
invsnr_input sc02 -h1 3 -h2 12 -e1 5 -e2 13 -azim1 40 -azim2 220
```

general Friday Harbor inputs

```
invsnr_input at01 -h1 9 -h2 14 -e1 5 -e2 13 -azim1 20 -azim2 22
```

St Michael inputs

Parameters

- **station** (*str*) – four ch ID of the station
- **h1** (*float, optional*) – Lower limit reflector height (m)
- **h2** (*float, optional*) – Upper limit reflector height (m)
- **e1** (*float, optional*) – Lower limit elev. angle (deg)
- **e2** (*float*) – Upper limit elev. angle (deg)

- **azim1** (*float*) – Lower limit azimuth angle (deg)
- **azim2** (*float*) – Upper limit azimuth angle (deg)
- **lat** (*float, optional*) – Latitude (degrees)
- **lon** (*float, optional*) – Longitude (degrees)
- **height** (*float, optional*) – Ellipsoidal height (meters)

`gnssrefl.invsnr_input.main()`

`gnssrefl.invsnr_input.parse_arguments()`

`gnssrefl.karnak_libraries` module

`gnssrefl.karnak_libraries.filename_plus(station9ch, year, doy, srate, stream)`

function to create RINEX 3 filenames for one day files.

Parameters

- **station9ch** (*str*) – 9 character station name
- **year** (*int*) –
- **doy** (*int*) – day of year
- **srate** (*int*) – receiver sample rate
- **stream** (*str*) – R or S ; latter means the file was streamed.
- **output** (*str*) – compliant filename with `crx.gz` on the end as this is how the files are stored at GNSS archives as far as I know.

Returns

- **file_name** (*str*) – filename of the RINEX 3 file
- **yyyyy** (*str*) – 4ch year
- **cdoy** (*str*) – 3ch day of year

`gnssrefl.karnak_libraries.ga_stuff(station, year, doy, rinexv=3)`

GA API requirements to download a Rinex 3 file

Parameters

- **station** (*str*) – 9 character station name
- **year** (*integer*) – full year
- **doy** (*int*) – day of year
- **rinexv** (*int*) – rinex version

Returns

- **QUERY_PARAMS** (*json*) – I think
- **headers** (*json*) – I think

`gnssrefl.karnak_libraries.ga_stuff_highrate(station, year, doy, rinexv=3)`

This should be merged with existing `ga_stuff` code

Parameters

- **station** (*str*) – 4 or 9 ch station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **rinexv** (*int*) – rinex version

Returns

- **QUERY_PARAMS** (*json*) – i think
- **headers** (*json*) – i think

`gnssrefl.karnak_libraries.gogetit(dir1, filename, ext)`

The purpose of this function is to to download RINEX 2 files. The code will try to get the file and check to see if it was successful.

Parameters

- **dir1** (*str*) – the main https directory address
- **filename** (*str*) – name of the GNSS files
- **ext** (*str*) – kind of ending to the filename, (Z, gz etc)

Returns

- **foundit** (*bool*) – whether file was found
- **f** (*str*) – name of the file

`gnssrefl.karnak_libraries.gsi_data(station, year, doy)`

get data from GSI

Parameters

- **station** (*str*) – 6 char station name
- **year** (*int*) – full year
- **doy** (*int*) – day of yare

`gnssrefl.karnak_libraries.just_bkg(cyyyy, cdoy, file_name)`

looks for RINEX files at BKG in two directories

Parameters

- **cyyyy** (*str*) – four character year
- **cdoy** (*str*) – three character day of year
- **file_name** (*str*) – expected RINEX filename

`gnssrefl.karnak_libraries.make_rinex2_ofiles(file_name)`

take a rinex2 file, gunzip or uncompress it, and then Hatanaka decompress it

Parameters

file_name (*string*) – rinex2 filename

Returns

- **new_name** (*string*) – filename after multiple decompression processes

- **fxist** (*boolean*) – whether file was successfully created

`gnssrefl.karnak_libraries.rinex2_highrate(station, year, doy, archive, strip_snr)`

kluge to download highrate data since i have revamped the rinex2 code `strip_snr` is boolean as to whether you want to strip out the non-SNR data it can be slow with highrate data. it requires `gfzrn`

Parameters

- **station** (*string*) – 4 character station ID. lowercase
- **year** (*integer*) – full year
- **doy** (*integer*) – day of year
- **archive** (*string*) – name of GNSS archive
- **strip_snr** (*boolean*) – whether you want to strip out the observables (leaving only SNR)

`gnssrefl.karnak_libraries.rinex2names(station, year, doy)`

Creates the expected filename for rinex2 version files

Parameters

- **station** (*string*) –
- **year** (*integer*) –
- **doy** (*integer*) – day of year
- **Results** –
- ----- –
- **f1** (*str*) – hatanaka rinex filename
- **f2** (*str*) – regular rinex filename
- **yyyy** (*str*) – four character year
- **cdoy** (*string*) – three character day of year

`gnssrefl.karnak_libraries.serial_cddis_files(dname, yyyy, cdoy)`

Looks for rinex files in the hatanaka decompression section of `cddis`

Parameters

- **dname** (*string*) – rinex2 filename without compression extension
- **yyyy** (*string*) – four character year
- **cdoy** (*string*) – three character day of yaer

Returns

- **foundit** (*bool*) – whether file was found
- **f** (*str*) – filename

`gnssrefl.karnak_libraries.strip_rinexfile(rinexfile)`

uses either `teqc` or `gfzrn` to reduce observables, i.e. only SNR data.

Parameters

- **rinexfile** (*string*) – name of the rinex2 file

`gnssrefl.karnak_libraries.swapRS(stream)`

function that swaps R to S and vice versa for RINEX 3 files

Parameters

stream (*str*) – RINEX 3 filename streaming acronym (S or R)

Returns

newstream – the opposite of what was in stream

Return type

str

`gnssrefl.karnak_libraries.universal(station9ch, year, doy, archive, srate, stream, debug=False)`

main code for seamless archive for RINEX 3 files ...

Parameters

- **station9ch** (*str*) – nine character station name
- **year** (*int*) – year
- **doy** (*int*) – day of year
- **archive** (*str*) – archive name
- **srate** (*int*) – receiver samplerate
- **stream** (*str*) – one character: R or S
- **debug** (*bool*) – whether debugging statements printed

Returns

- **file_name** (*str*) – name of rinexfile
- **foundit** (*boolean*) – whether file was found

`gnssrefl.karnak_libraries.universal_all(station9ch, year, doy, srate, stream, screenstats)`

check multiple archives for RINEX 3 data

Parameters

- **station9ch** (*str*) – 9 character station name
- **year** (*int*) – full year
- **doy** (*int*) – doy of year
- **srate** (*int*) – receiver sample rate
- **stream** (*str*) – R or S
- **screenstats** (*bool*) – print statements
- **Peturns** –
- ----- –
- **file_name** (*str*) – rinex filename
- **foundit** (*bool*) – whether rinex file was found

`gnssrefl.karnak_libraries.universal_rinex2(station, year, doy, archive, screenstats)`

seamless archive for rinex 2 files ...

Parameters

- **station** (*str*) – four character station name

- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **archive** (*str*) – name of the GNSS archive
- **screenstats** (*bool*) – whether print statements come to scree

Returns

- **file_name** (*str*) – filename that was downloaded
- **foundit** (*bool*) – whether file was found

gnssrefl.kelly module

`gnssrefl.kelly.the_kelly_simple_way(url, filename)`

new way to access rinex files at unavco using earthscope-sdk downloads file - does not translate or uncompress

Updated 2023 august 20 to place and expect the token in REFL_CODE

Parameters

- **url** (*string*) – path to the file
- **filename** (*string*) – rinexfilename you are downloading. Could be hatanaka or not

Returns

foundit – whether file was found

Return type

bool

gnssrefl.llh2xyz module

`gnssrefl.llh2xyz.main()`

Command line tool that converts latitude, longitude, and ellipsoidal ht to Cartesian coordinates and prints to the screen

Examples

llh2xyz 39.949492042 -105.194266387 1728.856

returns -1283634.1616 -4726427.8934 4074798.0432

Parameters

- **lat** (*float*) – latitude in degrees
- **lon** (*float*) – longitude in degrees
- **height** (*float*) – ellipsoidal height in meters

Returns

XYZ – Cartesian coordinates to the screen (m)

Return type

float

gnssrefl.make_meta module**gnssrefl.make_meta.check_offsets**(*station*, *meta_dict*)

check GAGE processing offset file for sources of possible gnssrefl timeseries offsets currently only relevant for ~3k stations processed by GAGE

Parameters

- **station** (*str*) – 4 character station ID.
- **meta_dict** (*dict*) – dictionary of metadata; keys ‘dates’, ‘current’, ‘previous’.

Returns

meta_dict – dictionary of metadata; keys ‘dates’, ‘current’, ‘previous’.

Return type

dict

gnssrefl.make_meta.get_coords(*station*, *lat*, *lon*, *height*)

initializes metadata dictionary with lat lon ht keys, either from UNR database (default) or user entered

Parameters

- **station** (*str*) – 4 character station ID.
- **lat** (*float*, *optional*, *default is None*) – latitude in deg
- **lon** (*float*, *optional*, *default is None*) – longitude in deg
- **height** (*float*, *optional*, *default is None*) – ellipsoidal height in m

Returns

comp_dict – dictionary of metadata; keys ‘lat’, ‘lon’, ‘ht’ ‘meta’.

Return type

dict

gnssrefl.make_meta.get_es_sdk_headers()

checks for earthscope-sdk authentication token and refreshes repurposed from gnssrefl/kelly.py

Returns

header – dictionary of es-sdk token

Return type

dict

gnssrefl.make_meta.main()

gnssrefl.make_meta.make_meta(*station*: *str*, *lat*: *float* = *None*, *lon*: *float* = *None*, *height*: *float* = *None*,
man_input: *bool* = *True*, *read_offset*: *bool* = *False*, *overwrite*: *bool* = *False*)

Make a json file that includes equipment metadata information. It saves your inputs to a json file saved in REFL_CODE/input/<station>_meta.json.

If station is in the UNR database, those lat/lon/ht values are used. You may override those values with the optional inputs.

The default is for the user to enter these values; multiple calls will append entries to the metadata array, unless the user sets overwrite to True. The user can attempt to extract some of this information from the GAGE offset file. GAGE file used is https://data.unavco.org/archive/gnss/products/offset/cwu.kalts_nam14.off (requires ES auth) [A caveat: this file is comprehensive for antennas changed by stations included in GAGE processing (n=~3k). Receivers are included, but incomplete.]

Examples

make_meta p038

makes json meta file for p038; uses UNR coords and will request user manually populate meta info. If meta json already exists for p038, will append to existing file.

make_meta test -lat 39.7417583 -lon -105.0706972 -height 1655

makes json meta file for test; uses manually input coords and will request user manually populate meta info

make_meta p038 -man_input False -read_offset True -overwrite True

makes json meta file for p038; uses UNR coords, will not request user manually populate meta info but will extract available meta info from GAGE offset file. Will overwrite any existing meta json file for p038

Parameters

- **station** (*str*) – 4 character station ID.
- **lat** (*float*, *optional*) – latitude in deg
- **lon** (*float*, *optional*) – longitude in deg
- **height** (*float*, *optional*) – ellipsoidal height in m
- **read_offset** (*bool*, *optional*) – set to True to parse GAGE offset file. default is False.
- **man_input** (*bool*, *optional*) – set to True to manually input equipment metadata. default is True.
- **overwrite** (*bool*, *optional*) – set to True to overwrite existing metadata file. default is False.

`gnssrefl.make_meta.meta_man_input(meta_dict)`

allows user to manually enter metadata information [Rx, Antenna, Dome, FW] at a given YYYY-mm-dd

Parameters

meta_dict (*dict*) – dictionary of metadata; keys 'dates','current','previous'.

Returns

meta_dict – dictionary of metadata; keys 'dates','current','previous'.

Return type

dict

`gnssrefl.make_meta.parse_arguments()`

gnssrefl.max_resolve_RH_cl module

`gnssrefl.max_resolve_RH_cl.main()`

`gnssrefl.max_resolve_RH_cl.max_resolve_RH(station: str, lat: float = None, lon: float = None, el_height: float = None, e1: float = 5, e2: float = 25, samplerate: float = 30, system: str = 'gps', hires_figs: bool = False)`

Calculates the Maximum Resolvable Reflector Height. This is analogous to a Nyquist frequency for GNSS-IR. It creates a plot and makes a plain txt file in case you want to look at the numbers.

Examples

max_resolve_RH sc02 -e1 5 -e2 15

typical case for most geodetic sites, 30 seconds, elevation angles 5-15 degrees

max_resolve_RH sc02 -samplerate 15 -system galileo

receiver sampling rate of 15 seconds and galileo

Parameters

- **station** (*str*) – 4 ch station name
- **lat** (*float*, *optional*) – latitude in deg
- **lon** (*float*, *optional*) – longitude in deg
- **el_height** (*float*, *optional*) – ellipsoidal height in m
- **e1** (*float*) – min elevation angles (deg)
- **e2** (*float*) – max elevation angles (deg)
- **samplerate** (*float*) – receiver sampling rate
- **system** (*str*, *optional*) – name of constellation (gps, glonass, galileo, beidou allowed)
default is gps
- **hires_figs** (*bool*) – whether you want eps files instead of png

Return type

Creates a figure file, stored in \$REFL_CODE/Files/station

`gnssrefl.max_resolve_RH_cl.parse_arguments()`

gnssrefl.mjd module

`gnssrefl.mjd.main()`

converts MJD to year, month, day, hour, minute, second and prints that to the screen

Parameters

mjd (*float*) –

gnssrefl.nmea2snr module

`gnssrefl.nmea2snr.NMEA2SNR(locdir, fname, snrfile, csnr, dec, year, doy, llh, sp3, gzip)`

Reads and translates the NMEA file stored in locdir + fname

Naming convention assumed for NMEA files : SSSS1520.23.A

where SSSS is station name, day of year is 152 and year is 2023

locdir is generally \$REFL_CODE/nmea/SSSS/yyyy where yyyy is the year number and SSSS is the station name

I believe lowercase is also allowed, but the A at the end is still set to be upper case

(I believe) The SNR files are stored with upper case if given upper case, lower case if given lower case.

Parameters

- **locdir** (*str*) – directory where your NMEA files are kept
- **fname** (*str*) – NMEA filename

- **snrfile** (*str*) – name of output file for SNR data
- **csnr** (*str*) – snr option, i.e. ‘66’ or ‘99’
- **dec** (*int*) – decimation value in seconds
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **llh** (*list of floats*) – station location, lat (deg), lon(deg), height (m)
- **sp3** (*bool*) – whether you use multi-GNSS sp3 file to do azimuth elevation angle calculations currently this only uses the GFZ rapid orbit.
- **gzip** (*bool*) – gzip compress snrfiles. No idea if it is used here ... as this compression should happen in the calling function, not here

`gnssrefl.nmea2snr.angle_range_positive(ang)`

someone should document this

Parameters

ang –

`gnssrefl.nmea2snr.azimuth_diff(azim1, azim2)`

someone should document this

Parameters

- **azim1** –
- **azim2** –

Return type

???

`gnssrefl.nmea2snr.azimuth_diff1(azim)`

Parameters

azim –

`gnssrefl.nmea2snr.azimuth_diff2(azim1, azim2)`

`gnssrefl.nmea2snr.azimuth_mean(azim1, azim2)`

someone should document this

Parameters

- **azim1** (*list of floats ?*) – azimuth degrees
- **azim2** (*list of floats*) – azimuth degrees

Returns

azim – azimuths in degrees

Return type

list of floats ?

`gnssrefl.nmea2snr.elev_limits(snroption)`

Given a snr option, return the elevation angle limits

Parameters

snroption (*int*) – snrfile number

Returns

- **emin** (*float*) – min elevation angle (degrees)
- **emax** (*float*) – max elevation angle (degrees)

`gnssrefl.nmea2snr.fix_angle_azimuth(time, angle, azimuth)`

interpolate elevation angles and azimuth to retrieve decimal values thru time this is for NMEA files.

Parameters

- **time** (*list of floats*) – GPS seconds of the week
- **angle** (*list of floats*) – elevation angles (degrees)
- **azimuth** (*list of floats*) – azimuth angles (degrees)

Returns

- **angle_fixed** (*list of floats*) – interpolated elevation angles
- **azim_fixed** (*list of floats*) – interpolated azimuth angles

`gnssrefl.nmea2snr.quickname(station, year, cyy, cdoy, csnr)`

Creates a full name of the snr file name (i.e. including the path) >>>> Checks that directories exist.

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*int*) – full year
- **cyy** (*str*) – two character year
- **cdoy** (*str*) – three character day of year
- **csnr** (*str*) – snr type, e.g. '66'

Returns

fname – output filename

Return type

str

`gnssrefl.nmea2snr.read_nmea(fname)`

reads a NMEA file. it only reads the GPGLGA sentence (includes snr data) in NMEA files

Parameters

fname (*string*) – NMEA filename

Returns

- **t** (*list of integers*) – timetags in GPS seconds
- **prn** (*list of integers*) – GPS satellite numbers
- **az** (*list of floats ??*) – azimuth values (degrees)
- **elv** (*list of floats ??*) – elevation angles (degrees)
- **snr** (*list of floats*) – snr values
- **freq** (*list of ???*) – apparently frequency values -

`gnssrefl.nmea2snr.run_nmea2snr(station, year_list, doy_list, isnr, overwrite, dec, llh, sp3, gzip)`

runs the nmea2snr conversion code

Looks for NMEA files in \$REFL_CODE/nmea/ssss/2023 for station ssss and year 2023. I prefer lowercase station names, but I believe the code allows both upper and lower case.

Files are named: SSSS1520.23.A

where SSSS is station name, day of year 152 and the last two characters of the 2023 as the middle value.

The SNR files are stored with upper case if given upper case, lower case if given lower case.

Parameters

- **station** (*str*) – 4 ch name of station
- **year_list** (*list of integers*) – years
- **doy_list** (*list of days of year*) – days of years
- **isnr** (*int*) – snr file type
- **overwrite** (*bool*) – whether make a new SNR file even if one already exists
- **dec** (*int*) – decimation in seconds
- **llh** (*list of floats*) – lat and lon (deg) and ellipsoidal ht (m)
- **sp3** (*bool*) – whether you want to use GFZ rapid sp3 file for the orbits
- **gzip** (*bool*) – whether snrfiles are gzipped after creation

gnssrefl.nmea2snr_cl module

`gnssrefl.nmea2snr_cl.main()`

main script for the nmea2snr conversion code

Looks for NMEA files in `$REFL_CODE/nmea/ssss/2023` for station `ssss` and year 2023 or `$REFL_CODE/nmea/SSSS/2023` for station `SSSS`. Personally I prefer lowercase station names, but I believe the code allows you to do either.

Files are named: SSSS1520.23.A or ssss1520.23.A

day of year is 152 and year is 2023 in this example

The SNR files are stored with upper case if given upper case, lower case if given lower case. Currently I have left the last character in the file name as it was given to me - capital A. If this should be lower case for people that use lowercase station names, please let me know.

As far as I can tell, the necessary fields in the NMEA files are GPGGA and GPGSV.

Originally this code used interpolations of the az and el NMEA fields. I have decided this is DANGEROUS. If you really want to use those low-quality measurements, you can use them by saying `-sp3 F`.

The default usage is to use multi-GNSS orbits from GFZ. To compute az-el, you need to provide a priori station coordinates. You can submit those on the command line or it will read them from the `$REFL_CODE/input/ssss.json` file (for station `ssss` or `SSSS`) if it exists.

As of 2023 September 14, the SNR files are defined in GPS time, which is how the file is defined. Prior to version 1.7.0, if you used the `sp3` option, the SNR files were written in UTC. This led to the orbits being propagated to the wrong time and thus az-el values are biased. The impact on RH is not necessarily large - but you should be aware. The best thing to do is remake your SNR files.

Parameters

- **station** (*str*) – 4 ch name of station
- **year** (*int*) – full year
- **doy** (*int*) – day of year

- **snr** (*str*, *optional*) – snr file type, default is 66
- **overwrite** (*bool*, *optional*) – whether make a new SNR file even if one already exists
- **dec** (*int*, *optional*) – decimation in seconds
- **lat** (*float*, *optional*) – latitude, deg, required for sp3file if json file not available
- **lon** (*float*, *optional*) – longitude, deg, required for sp3file if json file not available
- **height** (*float*, *optional*) – height, m, required for sp3file if json file not available
- **sp3** (*str*, *optional*) – set to False or F to use low quality NMEA values for az and el angles. this is changed to a boolean in the nmea2snr command line tool.
- **risky** (*str*, *optional*) – T or True if you want to use the NMEA az-el values instead of sp3 values. NMEA-based az-el values cannot be trusted, and thus the code is asking you to confirm that you know you are doing something that is risky.
- **gzip** (*bool*, *opt*) – compress SNR files after creation. Default is true

Examples

nmea2snr wesl 2023 8 -dec 5

makes SNR file with decimation of 5 seconds with good orbits

nmea2snr wesl 2023 8

makes SNR file with original sampling rate and good orbits

nmea2snr xyz2 2023 8 -lat 40.2342 -lon -120.32424 -height 12

makes SNR file with user provided station coordinates and good orbits

gnssrefl.nyquist_libs module

`gnssrefl.nyquist_libs.ny_plot(station, allN, info, hires_figs)`

allN is a numpy array of azimuth(deg)/nyquist(m) info is only needed for the title

Parameters

- **station** (*str*) – 4 char station name
- **allN** (*numpy array* ?) – azimuth and nyquist answers
- **info** (*str*) – information for the title
- **hires_figs** (*bool*) – whether you want eps instead of png

Returns

pngfile – name of plot file

Return type

str

`gnssrefl.nyquist_libs.pickup_files_nyquist(station, recv, obsfile, constel, e1, e2, reqsamplerate, hires_figs)`

Parameters

- **station** (*str*) – lowercase four character station name
- **recv** (*numpy array*) – Cartesian coordinates of station (m)
- **obsfile** (*str*) – name of orbit file

- **constel** (*int*) – requested constellation (1-4)
- **e1** (*float*) – min elevation angle (deg)
- **e2** (*float*) – max elevation angle (deg)
- **reqsamplerate** (*float*) – sample rate of receiver
- **hires_figs** (*bool*) – whether you want eps instead of png

`gnssrefl.nyquist_libs.read_the_orbits(obsfile, constel)`

Parameters

- **obsfile** (*str*) – name of the orbit file to be read
- **constel** (*int*) – which constellation (1-4), 1 for gps, 2 for glonass etc

gnssrefl.phase_functions module

`gnssrefl.phase_functions.apriori_file_exist(station, fr)`

reads in the a priori RH results

Parameters

- **station** (*string*) – station name
- **fr** (*integer*) – frequency

Return type

boolean as to whether the apriori file exists

`gnssrefl.phase_functions.convert_phase(station, year, year_end=None, plt2screen=True, fr=20, tmin=0.05, tmax=0.5, polyorder=-99, circles=False, subdir="", hires_figs=False)`

Convert GPS phase to VWC. Using Clara Chew's algorithm from Matlab write_vegcorrect_smc.m

<https://scipy-cookbook.readthedocs.io/items/SignalSmooth.html>

Parameters

- **station** (*str*) – 4 char station name
- **year** (*int*) – beginning year
- **year_end** (*int*) – last year
- **plt2screen** (*boolean*) – plots come to the screen
- **fr** (*integer*) – frequency default is L2C (20)
- **tmin** (*float*) – soil texture minimum
- **tmax** (*float*) – soil texture maximum
- **polyorder** (*integer*) – override on the polynomial order used in leveling
- **circles** (*boolean*) – final plot using circles (instead of line)
- **subdir** (*str*) – subdirectory for \$REFL_CODE/Files
- **hires_figs** (*bool*) – whether you want eps instead of png files created

`gnssrefl.phase_functions.daily_phase_plot(station, fr, datetime_dates, tv, xdir, subdir, hires_figs)`

makes a plot of daily averaged phase

Parameters

- **station** (*str*) – 4 char station name
- **fr** (*int*) – frequency of signal
- **datetime_dates** – datetime values for phase points
- **tv** (*list of results*) – cannot remember the format
- **xdir** (*str*) – location of the results (environment variable REFL_CODE)
- **subdir** (*str*) – subdirectory in Files
- **hires_figs** (*bool*) – whether you want eps instead of png files

`gnssrefl.phase_functions.filter_out_snow(station, year1, year2, fr, snowmask)`

attempt to remove outliers from snow. only called if the snow filter file exists

Parameters

- **station** (*str*) – four character station name
- **year1** (*integer*) – starting year
- **year2** (*integer*) – ending year
- **fr** (*integer*) – frequency, i.e. 1 or 20
- **snowmask** (*str*) – name/location of the snow mask file

`gnssrefl.phase_functions.load_avg_phase(station, fr)`

loads a previously computed daily average phase solution. this is NOT the same as the multi-track phase results. This file is now stored in station subdirectory in \$REFL_CODE/Files/

Parameters

station (*str*) – 4 character station ID, lowercase

Returns

- **avg_exist** (*boolean*)
- **avg_date** (*??*)
- **avg_phase** (*??*)

`gnssrefl.phase_functions.load_sat_phase(station, year, year_end, freq)`

Picks up the phase data from local results section return to main code whether dataexist, and np arrays of year, doy, hr, phase, azdata, ssat

Parameters

- **station** (*str*) – four character station name
- **year** (*integer*) – beginning year
- **year_end** (*integer*) – ending year
- **freq** (*integer*) – GPS frequency (1,20 allowed)

Returns

- **dataexist** (*bool*) – whether data found?
- **year** (*numpy array of int*) – full years

- **doy** (*numpy array of int*) – days of year
- **hr** (*float*) – fractional day (UTC)
- **ph** (*float*) – phases (deg)
- **azdata** (*float*) – azimuths (deg)
- **ssat** (*int*) – satellites (deg)
- **rh** (*float*) – reflector height (m)
- **amp** (*float*) – amplitudes of peak LSP
- **results** (*??*)

`gnssrefl.phase_functions.low_pct(amp, basepercent)`

emulated `amp_normK` code from PBO H2O inputs are the amplitudes and a percentage used to define the bottom level. returns normalized amplitudes

this is meant to be used by individual tracks (I think) in this case they are the top values, not the bottom ... ugh

`gnssrefl.phase_functions.make_snow_filter(station, medfilter, ReqTracks, year1, year2)`

runs `daily_avg` code so you have some idea of when the soil moisture products are contaminated by snow. make a file with these years and doys saved

Parameters

- **station** (*str*) – 4 ch station name
- **medfilter** (*float*) – how much you allow the individual tracks to deviate from the daily median (meters)
- **ReqTracks** (*integer*) – number of tracks to compute trustworthy daily average
- **year1** (*integer*) – starting year
- **year2** (*integer*) – ending year

Returns

- **snowmask_exists** (*boolean*)
- *creates output file into a file \$REFL_CODE/Files/snowmask_{ssss}.txt*

`gnssrefl.phase_functions.normAmp(amp, basepercent)`

emulated `amp_normK` code from PBO H2O inputs are the amplitudes and a percentage used to define the bottom level. returns normalized amplitudes this is meant to be used by individual tracks (I think) in this case they are the top values, not the bottom ... ugh

`gnssrefl.phase_functions.phase_tracks(station, year, doy, snr_type, fr_list, e1, e2, pele, plot, screenstats, compute_lsp, gzip)`

This does the main work of estimating phase and other parameters from the SNR files it uses tracks that were predefined by the `apriori.py` code

Parameters

- **name** (*station*) – 4 char id, lowercase
- **year** (*integer*) –
- **doy** (*integer*) – day of year
- **snr_type** (*integer*) – is the file extension (i.e. 99, 66 etc)
- **fr_list** (*list of integers*) – frequency, [1], [20] or [1,20]

- **e1** (*float*) – min elevation angle (degrees)
- **e2** (*float*) – max elevation angle (degrees)
- **pele** (*list of floats*) – elevation angle limits for the polynomial removal. units: degrees
- **screenstats** (*boolean*) – whether statistics are printed to the screen
- **compute_lsp** (*boolean*) – this is always true
- **gzip** (*boolean*) – whether you want SNR files gzipped after running the code
- **track.** (*Only GPS frequencies are allowed because this relies on the repeating ground*) –

`gnssrefl.phase_functions.read_apriori_rh(station, fr)`

read the track dependent a priori reflector heights needed for phase & thus soil moisture.

Parameters

- **station** (*str*) – four character ID, lowercase
- **fr** (*int*) – frequency (e.g. 1,20)

Returns

results – column 1 is just a number (1,2,3,4, etc)

column 2 is RH in meters

column 3 is satellite number

column 4 is azimuth of the track (degrees)

column 5 is number of values used in average

column 6 is minimum azimuth degrees for the quadrant

column 7 is maximum azimuth degrees for the quadrant

Return type

numpy array

`gnssrefl.phase_functions.test_func(x, a, b, rh_apriori)`

This is least squares for estimating a sine wave given a fixed frequency, freqLS

`gnssrefl.phase_functions.test_func_new(x, a, b, rh_apriori, freq)`

This is least squares for estimating a sine wave given a fixed frequency, freqLS now freq is input so it is not hardwired for L2

Parameters

- **x** (*numpy array of floats*) – sine(elevation angle) I think
- **a** (*float*) – amplitude - estimated
- **b** (*float*) – phase - estimated
- **rh_apriori** (*float*) – reflector height (m)
- **freq** (*int*) – frequency

`gnssrefl.phase_functions.vwc_plot(station, t_datetime, vwcdata, plot_path, circles)`

makes a plot of volumetric water content

Parameters

- **station** (*string*) – 4 ch station name
- **t_datetime** (*datetime*) – observation times for measurements
- **vwdata** (*numpy array of floats (I think)*) – volumetric water content
- **plot_path** (*Saves a plot to*) – full name of the plot file
- **circles** (*boolean*) – circles in the plot. default is a line (really .-)
- **plot_path** –

`gnssrefl.phase_functions.write_avg_phase(station, phase, fr, year, year_end, minvalperday, vxyz, subdir)`
creates output file for average phase results

Parameters

- **station** (*string*) –
- **phase** (*numpy list (float)*) – phase values
- **fr** (*int*) – frequency
- **year** (*int*) – first year evaluated
- **year_end** (*int*) – last year evaluated
- **minvalperday** (*int*) – required number of satellite tracks to trust the daily average
- **compilation** (*vxyz is from some other*) –
- **subdir** (*str*) – subdirectory for results

Returns

tv – year doy - day of year
meanph - mean phase value in degrees
nvals - number of values that went into the average

Return type

numpy array with elements

gnssrefl.pickle_dilemma module

`gnssrefl.pickle_dilemma.main()`
no inputs. checks for the feared pickle file

gnssrefl.prn2gps module

`gnssrefl.prn2gps.download_prn_gps()`
downloads PRN to GPS name conversion file from JPL
`gnssrefl.prn2gps.main()`
Displays the PRN and SVN numbers for the GPS constellation on a given date.

Parameters

- **date** (*str*) – example 2012-01-01
- **overwrite** (*bool, optional*) – whether you want to download new file from JPL

`gnssrefl.prn2gps.read_jpl_file(fname)`

Parameters

fname (*str*) – filename with prn gps conversion info

Returns

tv – start date (frac year), end date, GPS#, PRN #

Return type

list

gnssrefl.query_unr module

`gnssrefl.query_unr.main()`

Extracts coordinates for stations that were in the UNR database in late 2021. Prints both geodetic and cartesian values, and height above sea level.

Parameters

station (*str*) – four character station name

gnssrefl.quickLook_cl module

quickLook command line function

`gnssrefl.quickLook_cl.main()`

`gnssrefl.quickLook_cl.parse_arguments()`

`gnssrefl.quickLook_cl.quicklook(station: str, year: int, doy: int, snr: int = 66, fr: int = 1, ampl: float = 7.0, e1: float = 5, e2: float = 25, h1: float = 0.5, h2: float = 8.0, sat: int = None, peak2noise: float = 3.0, screenstats: bool = False, fortran: bool = None, plt: bool = True, azim1: float = 0.0, azim2: float = 360.0, ediff: float = 2.0, delTmax: float = 75.0, hires_figs: bool = False)`

quickLook assessment of SNR reflectometry data. It creates two plots: one with periodograms for four different quadrants (northwest, northeast, southeast, southwest) and the other with the RH results shown as a function of azimuth. This plot also summarizes why the RH retrievals were accepted or rejected in terms of the quality control parameters.

Examples

quickLook p041 2023 1

analyzes station p041 on day of year 1 in the year 2023 with defaults (L1, e1=5, e2=25)

quickLook p041 2023 1 -h1 1 -h2 10

analyzes station p041 on day of year 1 in the year 2023. The periodogram would be restricted to RH of 1-10 meters.

No refraction correction is applied at this stage. For this reason, very low elevation angle data at very tall sites will appear to be of very poor quality.

Parameters

- **station** (*str*) – 4 character ID of the station
- **year** (*int*) – Year
- **doy** (*int*) – Day of year

- **snr** (*int, optional*) – SNR format. This tells the code which SNR file to use. 66 is the default. Other options: 50, 88, and 99.
- **f** (*int, optional.*) – GNSS frequency. Default is GPS L1 value options:
 - 1,2,20,5 : GPS L1,L2,L2C,L5 (1 is default)
 - 101,102 : GLONASS L1 and L2
 - 201,205,206,207,208 : GALILEO E1 E5a E6,E5b,E5
 - 302,306,307 : BEIDOU B1, B3, B2
- **reqAmp** (*int or array_like, optional*) – Lomb-Scargle Periodogram (LSP) amplitude significance criterion in volts/volts. Default is 7
- **e1** (*int, optional*) – elevation angle lower limit in degrees for the LSP. default is 5.
- **e2** (*int, optional*) – elevation angle upper limit in degrees for the LSP. default is 25.
- **h1** (*float, optional*) – The allowed LSP reflector height lower limit in meters. default is 0.5.
- **h2** (*float, optional*) – The allowed LSP reflector height upper limit in meters. default is 6.
- **sat** (*integer, optional*) – specific satellite number, default is None.
- **peak2noise** (*int, optional*) – peak to noise ratio of the periodogram values (periodogram peak divided by the periodogram noise). For snow and ice, 3.5 or greater, tides can be tricky if the water is rough (and thus you might go below 3 a bit, say 2.7 default is 3.
- **screenstats** (*boolean, optional*) – Whether to print stats to the screen. default is False.
- **plt** (*boolean, optional*) – Whether to print plots to the screen. default is True. Regardless, png files are made
- **azim1** (*float, optional*) – minimum azimuth angle (deg) default is 0.
- **azim2** (*float, optional*) – maximum azimuth angle (deg) default is 360.
- **ediff** (*float, optional*) – elevation angle difference, quality control parameter default is 2 degrees.
- **deltmax** (*float, optional*) – maximum allowed arc length, in minutes default is 75 minutes.
- **hires_figs** (*bool, optional*) – eps instead of png files

gnssrefl.quickLook_function module

gnssrefl.quickLook_function.**goodbad**(*fname, station, year, doy, h1, h2, PkNoise, reqAmp, freq, e1, e2, hires_figs*)

makes a plot that shows “good” and “bad” reflector height retrievals as a function of azimuth

Parameters

- **fname** (*str*) – filename
- **station** (*str*) – 4 char station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year

- **h1** (*float*) – minimum reflector height (m)
- **h2** (*float*) – max reflector height (m)
- **PkNoise** (*float*) – peak 2 noise QC
- **reqAmp** (*float*) – required LSP amplitude
- **freq** (*int*) – frequency
- **e1** (*float*) – minimum elevation angle (deg)
- **e2** (*float*) – maximum elevation angle (deg)
- **hires_figs** (*bool*) – whether you want eps instead of png

Return type

plot is written \$REFL_CODE/Files/station/quickLook_summary.png

`gnssrefl.quickLook_function.quickLook_function(station, year, doy, snr_type, f, e1, e2, minH, maxH, reqAmp, pele, satsel, PkNoise, fortran, pltscreen, azim1, azim2, ediff, delTmax, hires_figs, **kwargs)`

This is the main function to compute spectral characteristics of a SNR file. It takes in all user inputs and calculates reflector heights. It makes two png files to summarize the data.

Parameters

- **station** (*str*) – station name (4 char)
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **snr_type** (*int*) – snr file extension (i.e. 99, 66 etc)
- **f** (*int*) – frequency (1, 2, 5), etc
- **e1** (*float*) – minimum elevation angle in degrees
- **e2** (*float*) – maximum elevation angle in degrees
- **minH** (*float*) – minimum allowed reflector height in meters
- **maxH** (*float*) – maximum allowed reflector height in meters
- **reqAmp** (*float*) – is LSP amplitude significance criterion
- **pele** (*list of floats*) – is the elevation angle limits for the polynomial removal. units: degrees
- **satsel** (*int*) – satellite number
- **PkNoise** (*float*) – peak to noise ratio for QC
- **fortran** (*bool*) – whether external fortran translator is being explicitly called.
- **pltscreen** (*bool*) – whether you want plots sent to the terminal
- **azim1** (*float*) – minimum azimuth in degrees
- **azim2** (*float*) – maximum azimuth in degrees
- **ediff** (*float*) – QC parameter - restricts length of arcs (degrees)
- **delTmax** (*float*) – maximum arc length in minutes
- **hires_figs** (*bool*) – whether to use eps instead of png

`gnssrefl.quickLook_function.read_snr_simple(obsfile)`

Loads the data from a SNR file into memory

Parameters

obsfile (*string*) – name of the SNR file

Returns

- **allGood** (*int*) – one for all is well, zero is for all is bad
- **sat** (*numpy array of floats*) – satellite numbers
- **ele** (*numpy array of floats*) – elevation angle (deg)
- **azi** (*numpy array of float*) – azimuth (deg)
- **t** (*numpy array of floats*) – seconds of the day (no leap seconds)
- **edot** (*numpy array of floats*) – derivative of elevation angle wrt time deg/sec
- **s1** (*numpy array of floats*) – L1 SNR
- **s2** (*numpy array of floats*) – L2 SNR
- **s5** (*numpy array of floats*) – L5 SNR
- **s6** (*numpy array of floats*) – L6 SNR
- **s7** (*numpy array of floats*) – L7 SNR
- **s8** (*numpy array of floats*) – L8 SNR
- **snrE** (*numpy array of booleans*) – whether SNR exists

gnssrefl.quickLook_function2 module

`gnssrefl.quickLook_function2.colorful(a, px, pz, lw, fullcolor, ax)`

plots the quadrant periodograms

Parameters

- **a** (*int*) –
- **px** (*numpy array of floats*) – x axis of amplitude power spectrum
- **pz** (*numpy array of floats*) – y axis of amplitude power spectrum
- **lw** (*float*) – line width
- **fullcolor** – whether you want full color (if not, it is gray)
- **ax** (*axis handle*) –

`gnssrefl.quickLook_function2.goodbad(fname, station, year, doy, h1, h2, PkNoise, reqAmp, freq, e1, e2, hires_figs)`

makes a plot that shows “good” and “bad” reflector height retrievals as a function of azimuth

Parameters

- **fname** (*str*) – filename
- **station** (*str*) – 4 char station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year

- **h1** (*float*) – minimum reflector height (m)
- **h2** (*float*) – max reflector height (m)
- **PkNoise** (*float*) – peak 2 noise QC
- **reqAmp** (*float*) – required LSP amplitude
- **freq** (*int*) – frequency
- **e1** (*float*) – minimum elevation angle (deg)
- **e2** (*float*) – maximum elevation angle (deg)
- **hires_figs** (*bool*) – whether to use eps instead of png

Return type

plot is written \$REFL_CODE/Files/station/quickLook_summary.png

`gnssrefl.quickLook_function2.quickLook_function(station, year, doy, snr_type, f, e1, e2, minH, maxH, reqAmp, pele, satsel, PkNoise, fortran, pltscreen, azim1, azim2, ediff, delTmax, hires_figs, **kwargs)`

This is the main function to compute spectral characteristics of a SNR file. It takes in all user inputs and calculates reflector heights. It makes two png files to summarize the data.

This is a new version that tries to pick all rising and setting arcs, not just those constrained to 90 degree quadrants.

Parameters

- **station** (*str*) – station name (4 char)
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **snr_type** (*int*) – snr file extension (i.e. 99, 66 etc)
- **f** (*int*) – frequency (1, 2, 5), etc
- **e1** (*float*) – minimum elevation angle in degrees
- **e2** (*float*) – maximum elevation angle in degrees
- **minH** (*float*) – minimum allowed reflector height in meters
- **maxH** (*float*) – maximum allowed reflector height in meters
- **reqAmp** (*float*) – is LSP amplitude significance criterion
- **pele** (*list of floats*) – is the elevation angle limits for the polynomial removal. units: degrees
- **satsel** (*int*) – satellite number
- **PkNoise** (*float*) – peak to noise ratio for QC
- **fortran** (*bool*) – whether external fortran translator is being explicitly called.
- **pltscreen** (*bool*) – whether you want plots sent to the terminal
- **azim1** (*float*) – minimum azimuth in degrees
- **azim2** (*float*) – maximum azimuth in degrees
- **ediff** (*float*) – QC parameter - restricts length of arcs (degrees)
- **delTmax** (*float*) – maximum arc length in minutes
- **hires_figs** (*bool*) – whether to use eps instead of png

`gnssrefl.quickLook_function2.set_labels(ax, axisSize, fs)`

try to set the appropriate labels depending on the quadrant

Parameters

- **ax** (*dictionary*) – plot handles
- **axisSize** (*numpy array of floats*) – lists the amplitudes of the various periodograms in a given quadrant pairs of quad (0-3), amplitude
- **fs** (*int*) – font size

`gnssrefl.quickLook_function2.whichquad(iaz)`

Parameters

- **iaz** (*float*) – azimuth of the arc, degrees
- **a** (*int*) – quad number in funny system

gnssrefl.quickPhase module

`gnssrefl.quickPhase.main()`

`gnssrefl.quickPhase.parse_arguments()`

`gnssrefl.quickPhase.quickphase(station: str, year: int, doy: int, year_end: int = None, doy_end: int = None, snr: int = 66, fr: str = '20', e1: float = 5, e2: float = 30, plt: bool = False, screenstats: bool = False, gzip: bool = False)`

quickphase computes phase, which are subsequently used in vwc. The command line call is phase (which maybe we should change).

Examples

phase p038 2021 4

analyzes data for year 2021 and day of year 4

phase p038 2021 1 -doy_end 365

analyzes data for the whole year

Parameters

- **station** (*str*) – 4 character ID of the station.
- **year** (*int*) – full Year to evaluate.
- **doy** (*int*) – day of year to evaluate.
- **year_end** (*int, optional*) – year to end analysis. Using this option will create a range from year-year_end. Default is None.
- **doy_end** (*int, optional*) – Day of year to end analysis. Using this option will create a range of doy-doy_end. If also using year_end, then this will be the day to end analysis in the year_end requested. Default is None.
- **snr** (*int, optional*) – SNR format. This tells the code what elevation angles are in the SNR file value options:

66 (default) : data with elevation angles less than 30 degrees

99 : data with elevation angles between 5 and 30 degrees

88 : data with all elevation angles

50 : data with elevation angles less than 10 degrees

- **fr** (*str*, *optional*) – GNSS frequency. Currently only supports L2C. Default is 20 (l2c)
- **e1** (*float*, *optional*) – Elevation angle lower limit in degrees for the LSP. default is 5
- **e2** (*float*, *optional*) – Elevation angle upper limit in degrees for the LSP. default is 30
- **plt** (*bool*, *optional*) – Whether to plot results. Default is False
- **screenstats** (*bool*, *optional*) – Whether to print stats to the screen. Default is False

Returns

- **Saves a file for each day in the doy-doy_end range**
(\$REFL_CODE/<year>/phase/<station>/<doy>.txt)
- *columns in files* – year doy hour phase nv azimuth sat ampl emin emax delT aprioriRH freq
estRH pk2noise LSPamp

gnssrefl.quicklib module

`gnssrefl.quicklib.trans_time(tvd, ymd, convert_mjd, ydoy, xcol, ycol)`

translates time for quickplt

Parameters

- **tvd** (*str*) – plain text file
- **ymd** (*bool*) – first three columns are year,month,day, hour, minute,second
- **convert_mjd** (*bool*) – convert from MJD (column 1 designation) time is datetime obj
- **ydoy** (*bool*) – first two columns are year and day of year time is datetime obj
- **xcol** (*int*) – column number for x-axis in python speak
- **ycol** (*int*) – column number for y-axis in python speak

Returns

- **tval** (*list*) – floats or datetime
- **yval** (*list*) – floats ?

gnssrefl.quickplt module

`gnssrefl.quickplt.main()`

quick file plotting using matplotlib

A png file is saved as temp.png or to your preferred filename if outfile is given. In either case, it goes to REFL_CODE/Files

Allows you to set x and y-axis limits with a title and various axes labels

a different symbol can also be set

Someone could easily update this to include different filetypes (e.g. jpeg)

Examples

quickplt txtfile 1 16

would plot column 1 on the x-axis and column 16 on the y-axis

quickplt txtfile 1 16 -xlabel Time

would plot column 1 on the x-axis and column 16 on the y-axis and add Time on the x-axis label

quickplt txtfile 1 16 -xlabel "Time (sec)"

would plot column 1 on the x-axis and column 16 on the y-axis and add Time (sec) on the x-axis label, but need quote marks since you have spaces in the x-axis labe.

quickplt txtfile 1 16 -reverse T

would plot column 1 on the x-axis and column 16 on the y-axis it would reverse the y-axis parameter as you might want if you are plotting RH but want it to have the same sense as a tide gauge.

quickplt txtfile 1 16 -ylimits 0 2

would restrict y-axis to be between 0 and 2

quickplt txtfile 1 16 -outfile myfile.png

would save png file to \$REFL_CODE/Files/myfile.png

Parameters

- **filename** (*str*) – name of file to be plotted
- **xcol** (*str*) – column number in the file for the x-axis parameter
- **ycol** (*str*) – column number in the file for the y-axis parameter
- **mjd** (*str*) – T or True, code will convert MJD to datetime, optional
- **xlabel** (*str*, *optional*) – label for x-axis
- **ylabel** (*str*) – label for y-axis
- **symbol** (*str*, *optional*) – prescribe the marker used in the plot
- **reverse** (*str*, *optional*) – T or True, to reverse y-axis limits
- **title** (*str*, *optional*) – title for plot
- **outfile** (*str*, *optional*) – name of png file to store plot
- **ylimits** (*float*, *optional*) – pair of yaxis limits
- **xlimits** (*float*, *optional*) – pair of xaxis limits

gnssrefl.read_snr_files module

`gnssrefl.read_snr_files.compress_snr_files(wantCompression, obsfile, obsfile2, TwoDays, gzip)`

compresses SNR files

Parameters

- **wantCompression** (*bool*) – whether the file should be compressed again
- **obsfile** (*str*) – name of first SNR file
- **obsfile2** (*str*) – name of second SNR file
- **TwoDays** (*bool*) – whether second file is being input
- **gzip** (*bool*) – whether you want to gzip/gunzip the file

`gnssrefl.read_snr_files.read_one_snr(obsfile, ifile)`

reads a SNR file, changes units (linear) and stores as variables

Parameters

- **obsfile** (*str*) – SNR file name
- **ifile** (*int*) – 1 for primary file or 2 for the day before the primary file

Returns

- **sat** (*numpy array of int*) – satellite number
- **ele** (*numpy array of floats*) – elevation angle in degrees
- **azi** (*numpy array of floats*) – azimuth in degrees
- **t** (*numpy array of floats*) – time in seconds of the day
- **edot** (*numpy array of floats*) – elevation angle derivative (units?)
- **s1** (*numpy array of floats*) – L1 SNR in dB-Hz
- **s2** (*numpy array of floats*) – L2 SNR in dB-Hz
- **s5** (*numpy array of floats*) – L5 SNR in dB-Hz
- **s6** (*numpy array of floats*) – L6 SNR in dB-Hz
- **s7** (*numpy array of floats*) – L7 SNR in dB-Hz
- **s8** (*numpy array of floats*) – L8 SNR in dB-Hz
- **snrE** (*bool list*) – whether the SNR exists for that Frequency

`gnssrefl.read_snr_files.read_snr_multiday(obsfile, obsfile2, twoDays, dec=1)`

originally meant to make snr arrays longer than a day to take care of midnight crossing. not currently invoked.

Snr data have units changed to linear units I believed.

Parameters

- **obsfile** (*string*) – name of first SNR input file
- **obsfile2** (*string*) – name of second SNR input file
- **twoDays** (*boolean*) – False (default) for using only the first file
- **dec** (*int*) – decimation value. 1 means do nothing
- **Results** –
- -----
- **allGood1** (*numpy array*) –
- **sat** (*numpy array*) – satellite numbers
- **ele** (*numpy array*) – elevation angle (degrees)
- **azi** (*numpy array*) – azimuth angles (degrees)
- **t** (*numpy array*) – time, seconds of the day, GPS time
- **edot** (*numpy array*) – derivative of elevation angle with respect to time
- **s1** (*numpy array*) – SNR on L1 frequency
- **s2** (*numpy array*) – SNR on L2 frequency

- **s5** (*numpy array*) – SNR on L5 frequency
- **s6** (*numpy array*) – SNR on L6 frequency
- **s7** (*numpy array*) – SNR on L7 frequency
- **s8** (*numpy array*) – SNR on L8 frequency
- **snrE** (*boolean*) – whether it exists

gnssrefl.refl_zones module

gnssrefl.refl_zones.**FresnelZone**(*f, e, h*)

based on GPS Tool Box Roesler and Larson (2018). Original source is Felipe Nievinski as published in the appendix of Larson and Nievinski 2013 this code assumes a horizontal, untilted reflecting surface

Parameters

- **f** (*int*) – frequency (1,2, or 5)
- **e** (*float*) – elevation angle (deg)
- **h** (*float*) – reflector height (m)

Returns

firstF – [a, b, R] in meters where: a : is the semi-major axis, aligned with the satellite azimuth
b : is the semi-minor axis R : locates the center of the ellispe on the satellite azimuth direction (theta)

Return type

list of floats

gnssrefl.refl_zones.**calcAzEl_new**(*prn, newf, recv, u, East, North*)

function to gather azel for all low elevation angle data this is used in the reflection zone mapping tool

Parameters

- **prn** (*int*) – satellite number
- **newf** (*3 vector of floats*) – cartesian coordinates of the satellite (meters)
- **recv** (*3 vector of floats*) – receiver coordinates (meters)
- **u** (*3 vector*) – cartesian unit vector for up
- **East** (*3 vector*) – cartesian unit vector for east direction
- **North** (*3 vector*) – cartesian unit vector for north direction

Returns

tv – list of satellite tracks [prn number, elevation angle, azimuth angle]

Return type

numpy array of floats

gnssrefl.refl_zones.**calcAzEl_newish**(*prn, newf, recv, u, East, North*)

should be consolidated with the other function.but who has the time!

Parameters

- **prn** (*int*) – satellite number ?
- **newf** –
- **u** (*numpy array*) – up unit vector

- **East** –
- **North** –

Returns

tv

Return type

numpy array

`gnssrefl.refl_zones.makeEllipse_latlon(freq, el, h, azim, latd, lngd)`

for given fresnel zone, produces coordinates of an ellipse

Parameters

- **freq** (*int*) – frequency
- **el** (*float*) – elevation angle in degrees
- **h** (*float*) – reflector height in meters
- **azim** (*float*) – azimuth in degrees
- **latd** (*float*) – latitude in degrees
- **lngd** (*float*) – longitude in degrees

Returns

- **lngdnew** (*float*) – new longitudes in degrees
- **latdnew** (*float*) – new latitudes in degrees

`gnssrefl.refl_zones.makeFresnelEllipse(A, B, center, azim)`

make an Fresnel zone given size, center, and orientation

Parameters

- **A** (*float*) – semi-major axis of ellipse in meters
- **B** (*float*) – semi-minor axis of ellipse in meters
- **center** (*float*) – center of the ellipse, provided as distance along the satellite azimuth direction
- **azimuth** (*float*) – azimuth angle of ellipse in degrees. this will be clockwise positive as defined from north

Returns

- **x** (*numpy array of floats*) – x value of cartesian coordinates of ellipse
- **y** (*numpy array of floats*) – y value of cartesian coordinates of ellipse
- **xcenter** (*float*) – x value for center of ellipse in 2-d cartesian
- **ycenter** (*float*) – y value for center of ellipse in 2-d cartesian

`gnssrefl.refl_zones.make_FZ_kml(station, filename, freq, el_list, h, lat, lng, azlist)`

makes fresnel zones for given azimuth and elevation angle lists.

Parameters

- **station** (*str*) – four character station name
- **filename** (*str*) – output filename (the kml extension should already be there)
- **freq** (*int*) – frequency (1,2, or 5)

- **el_list** (*list of floatss*) – elevation angles
- **h** (*float*) – reflector height in meters
- **lat** (*float*) – latitude in deg
- **lng** (*float*) – longitude in degrees
- **azlist** (*list of floats*) – azimuths

`gnssrefl.refl_zones.nyquist_simple(t, elev, azims, emin, emax, azriseset, reqsamplerate)`

given numpy array of elevation angles (elev) and limits (emin,emax) and azriseset, reqsamplerate

Parameters

- **t** – cannot remember
- **elev** (*numpy array of floats*) – elevation angle of rising/setting arcs
- **azims** (*numpy array of floats*) – azimuths of rising/setting arcs
- **emin** (*float*) – minimum elevation angle, degrees
- **emax** (*float*) – maximum elevation angle, degrees
- **azriseset** – cannot remember
- **reqsamplerate** (*float*) – requested receiver sampling rate

`gnssrefl.refl_zones.rising_setting_new(recv, el_range, obsfile)`

Calculates potential rising and setting arcs

Parameters

- **recv** (*list of floats*) – Cartesian coordinates of station in meters
- **el_range** (*list of floats*) – elevation angles in degrees
- **obsfile** (*str*) – orbit filename

Returns

azlist – azimuth angle (deg), PRN, elevation angle (Deg)

Return type

list of floats

`gnssrefl.refl_zones.save_reflzone_orbits()`

check that orbit files exist for reflection zone code. downloads to \$REFL_CODE\$/Files directory if needed

Returns

foundfiles – whether needed files were found

Return type

bool

`gnssrefl.refl_zones.set_azlist_multi_regions(sectors, azlist)`

edits initial azlist to restrict to given azimuth sectors. assumes that illegal list of sectors have been checked (i.e. no negative azimuths, they should be pairs, and increasing)

Parameters

- **sectors** (*list of floats*) – min and max azimuth (degrees). Must be in pairs, no negative numbers
- **azlist** (*list of floats*) – list of tracks, [azimuth angle, satNumber, elevation angle]

Returns

azlist2 – same format as before, but with azimuths removed outside the restricted zones

Return type

list of floats

`gnssrefl.refl_zones.set_final_azlist(a1ang, a2ang, azlist)`

edits initial azlist to restrict to given azimuths

Parameters

- **a1ang** (*float*) – minimum azimuth (degrees)
- **a2ang** (*float*) – maximum azimuth (degrees)
- **azlist** (*list of floats*) – list of tracks, [azimuth angle, satNumber, elevation angle]

Returns

azlist

Return type

list of floats

`gnssrefl.refl_zones.set_system(system)`

finds the file needed to compute orbits for reflection zones

Parameters

- **system** (*str*) – gps, glonass, beidou, or galileo
- **it** (*int*) – simple pointer from former code. 1 is GPS, 2 is Glonass etc

Returns

orbfile – orbit filename with Cartesian coordinates for one day

Return type

str

`gnssrefl.refl_zones.write_coords(lng, lat)`

Parameters

- **lng** (*list of floats*) – longitudes in degrees
- **lat** (*list of floats*) – latitudes in degrees

Returns

points – for google maps

Return type

list of pairs of long/lat

gnssrefl.refl_zones_cl module

`gnssrefl.refl_zones_cl.main()`

`gnssrefl.refl_zones_cl.parse_arguments()`

`gnssrefl.refl_zones_cl.reflzones(station: str, azim1: int = 0, azim2: int = 360, lat: float = None, lon: float = None, height: float = None, RH: float = None, fr: int = 1, el_list: float = [], azlist: float = [], system: str = 'gps', output: str = None)`

This module creates “stand-alone” Fresnel Zones maps for google Earth. At a minimum it requires a four station character name as input. The output is a KML file.

If the station is in the UNR database, those latitude, longitude, and ellipsoidal height values are used. You may override those values with the optional inputs.

The output file will be stored in REFL_CODE/Files/kml unless you specify an output name. In that case it will go into your working directory

The defaults are that it does all azimuths, elevation angles of 5-10-15, GPS L1, and uses the height of the station above sea level to use for the RH. If you want to specify the reflector height, set -RH. If you are making a file for an interior lake or river, you will need to use this option. Similarly, for a soil moisture or snow reflection zone map, where height above sea level is not important, you will want to set the RH value accordingly.

Examples

refl_zones p041 -RH 2

standard Fresnel zones for all azimuths, GPS and L1 frequency, RH of 2 meters

refl_zones sc02 -fr 2 -azlist 40 240

Fresnel zones for limited azimuths, GPS and L2 frequency. RH is mean sea level

refl_zones p041 -RH 5 -system galileo

Fresnel zones for reflector height of 5 meters and Galileo L1

refl_zones xxxx -RH 5 -lat 40 -lon 120 -height 10

Using a station not in the UNR database, so station position given Note that this is the ellipsoidal height.

Parameters

- **station** (*str*) – station name
- **azim1** (*int*, *optional*) – min azimuth angle in deg
- **azim2** (*int*, *optional*) – max azimuth angle in deg
- **lat** (*float*, *optional*) – latitude in deg
- **lon** (*float*, *optional*) – longitude in deg
- **height** (*float*, *optional*) – ellipsoidal height in m
- **RH** (*float*, *optional*) – user-defined reflector height (m) default is to use sea level as the RH
- **fr** (*int*, *optional*) – frequency (only 1,2, or 5 allowed)
- **el_list** (*list of floats*, *optional*) – elevation angles desired (deg) default is 5, 10, 15
- **azlist** (*list of floats*, *optional*) – azimuth angle regions (deg) Must be in pairs, i.e. 0 90 180 270
- **system** (*str*, *optional*) – name of constellation (gps,glonass,galileo, beidou allowed) default is gps
- **output** (*str*, *optional*) – name for kml file

Return type

Creates a KML file for Google Earth

gnssrefl.refraction module

written in python from original TU Vienna codes for GMF

`gnssrefl.refraction.Ulich_Bending_Angle(ele, N0, lsp, p, T, ttime, sat)`

Ulich, B. L. “Millimeter wave radio telescopes: Gain and pointing characteristics.” (1981)

Author: 20220629, fengpeng modified to use numpy so I can do arrays

currently writes out corrections to a file for testing

Parameters

- **ele** (*numpy array of floats*) – true elevation angle, degrees
- **N0** (*float*) – antenna refractivity in ppm

Returns

De – corrected elevation angle, deg

Return type

numpy array of floats

`gnssrefl.refraction.corr_el_angles(el_deg, press, temp)`

Corrects elevation angles for refraction using simple angle bending model

Parameters

- **el_deg** (*numpy array of floats*) – elevation angles in degrees
- **press** (*float*) – pressure in hPa
- **temp** (*float*) – temperature in degrees C

Returns

corr_el_deg – corrected elevation angles (in degrees)

Return type

numpy array of floats

`gnssrefl.refraction.gpt2_1w(station, dmjd, dlat, dlon, hell, it)`

Parameters

- **station** (*str*) – station name
- **dmjd** (*float*) – modified Julian date (scalar, only one epoch per call is possible)
- **dlat** (*float*) – ellipsoidal latitude in radians $[-\pi/2; +\pi/2]$
- **dlon** (*float*) – longitude in radians $[-\pi; \pi]$ or $[0; 2\pi]$
- **hell** (*float*) – ellipsoidal height in m
- **it** (*integer*) – case 1: no time variation but static quantities
case 0: with time variation (annual and semiannual terms)

Returns

- **p** (*float*) – pressure in hPa
- **T** (*float*) – temperature in degrees Celsius
- **dT** (*float*) – temperature lapse rate in degrees per km
- **Tm** (*float*) – mean temperature of the water vapor in degrees Kelvin

- **e** (*float*) – water vapor pressure in hPa
- **ah** (*float*) – hydrostatic mapping function coefficient at zero height (VMF1)
- **aw** (*float*) – wet mapping function coefficient (VMF1)
- **la** (*float*) – water vapor decrease factor
- **undu** (*float*) – geoid undulation in m

`gnssrefl.refraction.look_for_pickle_file()`

latest attempt to solve the dilemma of the pickle file needed for the refraction correction

Returns

- **foundit** (*bool*) – whether pickle file found
- **fullpname** (*str*) – full path to the pickle file

`gnssrefl.refraction.readWrite_gpt2_1w(xdir, station, site_lat, site_lon)`

makes a grid for refraction correction

Parameters

- **xdir** (*str*) – directory for output
- **station** (*str*) – station name, 4 ch
- **lat** (*float*) – latitude in degrees
- **lon** (*float*) – longitude in degrees

`gnssrefl.refraction.read_4by5(station, dlat, dlon, hell)`

reads existing grid points for a given location

Parameters

- **station** (*string*) – name of station
- **dlat** (*float*) – latitude in degrees
- **dlon** (*float*) – longitude in degrees
- **hell** (*float*) – ellipsoidal height in meters

Returns

- **pgrid** (*4 by 5 numpy array*) – pressure in hPa
- **Tgrid** (*4 by 5 numpy array*) – temperature in C
- **Qgrid** (*4 by 5 numpy array*)
- **dTgrid** (*4 by 5 numpy array*) – temperature lapse rate in degrees per km
- **u** (*4 by 1 numpy array*) – geoid undulation in meters
- **Hs** (*4 by 1 numpy array*)
- **ahgrid** (*4 by 5 numpy array*) – hydrostatic mapping function coefficient at zero height (VMF1)
- **awgrid** (*4 by 5 numpy array*) – wet mapping function coefficient (VMF1)
- **lagrid** (*4 by 5 numpy array*)
- **Tmgrid** (*4 by 5 numpy array*) – mean temperature of the water vapor in degrees Kelvin
- *requires that an environment variable exists for REFL_CODE*

`gnssrefl.refraction.refrc_Rueger(drypress, vpress, temp)`

Obtains refractivity index suitable for GNSS-IR

Rüeger, Jean M. “Refractive index formulae for radio waves.” Proceedings of the FIG XXII International Congress, Washington, DC, USA. Vol. 113. 2002.

Parameters

- **drypress** (*float*) – dry pressure hPa
- **vpress** (*float*) – vapor pressure in hPa
- **temp** (*float*) – temperature in Kelvin

Returns

ref – [Ntotal, Nhydro, Nwet], which are total, hydrostatic and wet refractivity in ppm

Return type

list of floats

gnssrefl.rh_plot module

`gnssrefl.rh_plot.main()`

`gnssrefl.rh_plot.parse_arguments()`

`gnssrefl.rh_plot.rh_plot(station: str, year: int, csvfile: bool = False, plt: bool = True, extension: str = "", doy1: int = 1, doy2: int = 366, ampl: float = 0, h1: float = 0.0, h2: float = 300.0, azim1: int = 0, azim2: int = 360, peak2noise: float = 0)`

Parameters

- **station** (*string*) – 4 character id of the station.
- **year** (*integer*) – Year
- **csvfile** (*boolean, optional*) – Set to True if you prefer csv to plain txt. default is False.
- **plt** (*boolean, optional*) – To print plots to screen or not. default is TRUE.
- **extension** (*string, optional*) – Solution subdirectory. default is empty string.
- **doy1** (*integer, optional*) – Initial day of year default is 1.
- **doy2** (*integer, optional*) – End day of year. default is 366.
- **ampl** (*float*) – New amplitude constraint default is 0.
- **azim1** (*int, optional*) – New min azimuth default is 0.
- **azim2** (*int, optional*) – New max azimuth default is 360.
- **h1** (*float optional*) – lowest allowed reflector height default is 0
- **h2** (*float optional*) – highest allowed reflector height default is 300
- **peak2noise** (*float, optional*) – New peak to noise constraint default is 0.

gnssrefl.rinex2snr module**class gnssrefl.rinex2snr.constants**

Bases: object

c = 299792458**mu** = 3986005000000000.0**omegaEarth** = 7.2921151467e-05**gnssrefl.rinex2snr.conv2snr**(*year, doy, station, option, orbtype, receiverrate, dec_rate, archive, fortran, translator*)

convert RINEX files to SNR files

Parameters

- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **option** (*int*) – snr choice (66, 99 etc)
- **orbtype** (*str*) – orbit source (nav, gps, gnss, etc)
- **receiverrate** (*int*) – sampling interval of the GPS receiver, e.g. 1, 30, 15
- **dec_rate** (*int*) – decimation value to reduce file size
- **archive** (*str*) – external location (archive) of the rinex files
- **fortran** (*bool*) – whether fortran translator to be used. this is here for backwards compatibility
- **translator** (*str*) – hybrid, python, or fortran

gnssrefl.rinex2snr.elev_limits(*snroption*)

For given SNR option, returns elevation angle limits

Parameters**snroption** (*integer*) – snr file delimiter**Returns**

- **emin** (*float*) – minimum elevation angle (degrees)
- **emax** (*float*) – maximum elevation angle (degrees)

gnssrefl.rinex2snr.extract_snr(*prn, con, obslist, obsdata, prntoidx, not_ij, emp*)**gnssrefl.rinex2snr.get_local_rinexfile**(*rfile, localpath2*)

look for a plain or gzipped version of the RINEX 2.11 file in the year subdirectories copies it to the local directory. this method stops the code from deleting your rinex files. As of 2023 September 19, it should also look for Hatanaka files.

`localpath2 = os.environ['REFL_CODE'] + '/' + cyyyy + '/rinex/' + station + '/'`

This is unlikely to work for uppercase RINEX files. Try the mk option

Parameters

- **rfile** (*str*) – version2 rinexfile name
- **localpath2** (*str*) – another location of the file (meant to be as defined above)

Returns

allgood – whether file found

Return type

bool

`gnssrefl.rinex2snr.go_from_crxgz_to_rnx(c3gz, deletecrx=True)`

checks to see if rinex3 file exists, gunzip if necessary, run hatanaka, if necessary

Parameters

- **c3gz** (*str*) – filename for a gzipped RINEX 3 Hatanaka file
- **bool** (*deletecrx* =) – whether to delete the crx file

Returns

- **translated** (*bool*) – if file successfully found and available
- **rnx** (*str*) – name of gunzipped and decompressed RINEX 3

`gnssrefl.rinex2snr.navorbits(navfile, obstimes, observationdata, obslist, prntoidx, gpssatlist, snrfile, s1exist, s2exist, s5exist, up, East, North, emin, emax, recv, dec_rate, log)`

Strandberg nav reading file?

Parameters

- **navfile** (*string*) –
- **obstimes** –
- **observationdata** –
- **obslist** –
- **prn2oidx** –
- **gpssatlist** –
- **snrfile** (*str*) – name of the output file
- **s1exist** –
- **s2exist** –
- **s5exist** –
- **!** (*This is for GPS only files*) –
- **format** (*navfile is nav broadcast ephemeris in RINEX*) –
- **info** (*inputs are rinex*) –
- **obstimes** –
- **observationdata** –
- **prntoidx** –
- **gpssatlist** –
- **existence** (*various bits about SNR*) –
- **name** (*snrfile is output*) –
- **file** (*log is for screen outputs - now going to a*) –

`gnssrefl.rinex2snr.print_archives()`

feeble attempt to print list of archives to screen ...

`gnssrefl.rinex2snr.quickname(station, year, cyy, cday, csnr)`

creates filename for a local SNR file

Parameters

- **station** (*str*) – station name, 4 character
- **year** (*int*) – full year
- **cyy** (*str*) – two character year
- **cday** (*str*) – three character day of year
- **csnr** (*str*) – snr ending, i.e. ‘66’ or ‘99’

Returns

fname – full filename including the directory

Return type

str

`gnssrefl.rinex2snr.readSNRval(s1exist, s2exist, s5exist, observationdata, prntoidx, sat, i)`

what it looks like only reads GPS data for now interface between Joakim’s code and mine ...

Parameters

- **s1exist** (*boolean*) –
- **s2exist** (*boolean*) –
- **s5exist** (*boolean*) –

Returns

- *s1*
- *s2*
- *s5*

`gnssrefl.rinex2snr.rnx2snr(obsfile, navfile, snrfile, snroption, year, month, day, dec_rate, log)`

Converts a rinex v2.11 obs file using Joakim’s rinex reading code

Parameters

- **obsfile** (*str*) – RINEX 2.11 filename
- **navfile** (*str*) – navigation file
- **snrfile** (*str*) – SNR filename
- **snroption** (*integer*) – kind of SNR file requested
- **year** (*int*) – full year
- **month** (*int*) – calendar month
- **day** (*int*) – calendar day
- **dec_rate** (*int*) – decimation rate in seconds

`gnssrefl.rinex2snr.run_rinex2snr(station, year_list, doy_list, isnr, orbtype, rate, dec_rate, archive, fortran, nol, overwrite, translator, srate, mk, skipit, stream, strip, bkg, screenstats, gzip)`

main code to convert RINEX files into SNR files

Parameters

- **station** (*string*) – 4 or 9 character station name. 6 ch allowed for japanese archive
- **year_list** (*list of int*) – years to be analyzed
- **doy_list** (*list of integers*) – doys to be analyzed
- **isnr** (*integer*) – SNR file type choice
- **orbtype** (*string*) – orbit type, e.g. nav, rapid, gnss
- **rate** (*string*) – general sample rate. high: use 1-Hz area in the archive low: use default area in the archive
- **dec_rate** (*integer*) – decimation value
- **archive** (*string*) – choice of GNSS archive
- **fortran** (*boolean*) – whether the fortran rinex translator is to be used default: false
- **nol** (*boolean*) – True: assumes RINEX files are in local directory False (default): will look at multiple - or specific archive
- **overwrite** (*boolean*) – False (default): if SNR file exists, SNR file not made True: make a new SNR file
- **translator** (*string*) – hybrid (default), fortran, or python hybrid uses fortran within the python code
- **srate** (*integer*) – sample rate for RINEX 3 files
- **mk** (*boolean*) – makan option
- **skipit** (*int*) – skips making files every day, so a value of 7 means weekly. 1 means do every day
- **strip** (*boolean*) – reduces observables to only SNR (too many observables, particularly in RINEX 2 files will break the RINEX translator)
- **bkg** (*str*) – location of bkg files, EUREF or IGS
- **screenstats** (*bool*) – whether print statements come to screen
- **gzip** (*bool*) – whether SNR files are gzipped after creation

`gnssrefl.rinex2snr.satorb(week, sec_of_week, ephem)`

Calculate GPS satellite orbits

Parameters

- **week** (*integer*) – GPS week
- **sec_of_week** (*float*) – GPS seconds of the week
- **ephem** (*ephemeris block*) –

Returns

the x,y,z, coordinates of the satellite in meters and relativity correction (also in meters), so you add, not subtract

Return type

numpy array

`gnssrefl.rinex2snr.satorb_prop(week, secweek, prn, rrec0, closest_ephem)`

Calculates and returns geometric range (in metres) given time (week and sec of week), prn, receiver coordinates (cartesian, meters) this assumes someone was nice enough to send you the closest ephemeris returns the satellite coordinates as well, so you can use htem in the A matrix

Parameters

- **week** (*integer*) – GPS week
- **secweek** (*integer*) – GPS second of the week
- **prn** (*integer*) – satellite number
- **rrec0** (*3vector*) – receiver coordinates, meters

Returns**SatOrbn** – floats, Cartesian location of satellite in meters [x,y,z]**Return type**

3vector

`gnssrefl.rinex2snr.satorb_prop_sp3(iX, iY, iZ, recv, Tp, ij)`

for satellite number prn and receiver coordinates rrec0 find the x,y,z coordinates at time secweek

Parameters

- **iX** (*float*) –
- **iY** (*float*) –
- **iZ** (*float*) –
- **recv** (*3 vector, float*) –
- **Tp** –
- **ij** –
- **it** (*sp3 has the orbit information in*) –

`gnssrefl.rinex2snr.the_makan_option(station, cyyyy, cyy, cday)`

this ugly looking code checks a bazillion versions of RINEX versions (Z, gz, regular, hatanaka) both in the working directory and in an external rinex area \$REFL_CODE/rinex/station/year

turns whatever it finds into a regular RINEX file in the working directory that file WILL be deleted, but it will not delete those stored externally.

Parameters

- **station** (*str*) – station name (4 ch)
- **cyyyy** (*str*) – 4 ch year
- **cyy** (*str*) – two ch year
- **cday** (*str*) – three ch day of year

gnssrefl.rinex2snr_cl module

command line tool for the rinex2snr module it translates rinex files and makes SNR files

compile the fortran first `f2py -c -m gnssrefl.gpssnr gnssrefl/gpssnr.f`

`gnssrefl.rinex2snr_cl.main()`

`gnssrefl.rinex2snr_cl.parse_arguments()`

`gnssrefl.rinex2snr_cl.rinex2snr(station: str, year: int, doy: int, snr: int = 66, orb: str = None, rate: str = 'low', dec: int = 0, fortran: bool = False, noloook: bool = False, archive: str = 'all', doy_end: int = None, year_end: int = None, overwrite: bool = False, translator: str = 'hybrid', samplerate: int = 30, stream: str = 'R', mk: bool = False, weekly: bool = False, strip: bool = False, screenstats: bool = False, gzip: bool = True)`

rinex2snr translates RINEX files to a new file in SNR format. This function will also fetch orbit files for you. RINEX obs files are provided by the user or fetched from a long list of archives. Although RINEX 3 is supported, the default is RINEX 2.11 files

Default orbits are GPS only until day of year 137, 2021 when rapid GFZ orbits became available. If you still want to use the nav message, i.e. GPS only, you can request it.

bkg no longer a boolean input - must be specified with archive name, i.e. bkg-igs or bkg-euref

For the noloook option :

If you have the RINEX 2.11 file), the file was originally required to be normal RINEX (ends in o) or gzipped normal RINEX. It can be in the local directory or in the \$REFL_CODE/YYYY/rinex directory for your station. It now allows RINEX 2.11 files that are Hatanaka compressed, Hatanaka compressed + unix compressed, for the local directory. It also allows Hatanaka compressed in the REFL_CODE directory. Beyond that, you can try the -mk T option which searches other places.

For RINEX 3 files, I believe it checks for crx.gz, rnx, or rnx.gz endings in the local directory. It does NOT check the \$REFL_CODE/YYYY/rinex directory. If someone would like to add that capability, that would be great.

FAQ: what is rate and srate? rate is telling the code which folder to use because archives always have files in different directories depending on sample rate. srate is for RINEX 3 files only because RINEX 3 has the sample rate on the filename itself (not just the directory).

What is the stream parameter? This is for RINEX 3 only. File types are either S or R. I believe S stands for streamed.

RINEX3 30 second archives supported

bev, bkg-euref, bkg-igs, cddis, epn, ga, gfz, nrcan, sonel

RINEX3 15 sec archives

bfg, unavco - you may need to specify 15 second sample rate

RINEX3 1 sec

bkg-igs, bkg-euref, cddis, maybe nrcan

Examples

rinex2snr mchn 2018 15 -archive sopac

station mchn, year/doy 2022/15,sopac archive using GPS orbits

rinex2snr mchn 2022 15 -archive sopac

station mchn, year/doy 2022/15,sopac archive using multi-GNSS GFZ orbits

rinex2snr mchn 2022 15 -archive sopac -orb gps

station mchn, year/doy 2022/15,sopac archive using GPS orbits

rinex2snr mchn 2022 15 -orb rapid -archive sopac

now explicitly using rapid multi-GNSS orbits

rinex2snr mchn 2022 15 -orb rapid -archive sopac

now explicitly using final multi-GNSS orbits (includes Beidou)

rinex2snr mchn 2022 15 -orb rapid -archive sopac -overwrite T

have an SNR file, but you want to make a new one

rinex2snr p041 2022 15 -orb rapid -rate high -archive unavco

now using high-rate data from unavco and multi-GNSS orbits

rinex2snr p041 2022 15 -nolook T

using your own data stored as p0410150.22o in the working directory your RINEX o file may also be gzipped. I believe Hatanaka compressed is also allowed.

rinex2snr 940050 2021 31 -archive jp

GSI archive in Japan - password required. Station names are six characters

rinex2snr mchl00aus 2022 15 -orb rapid -archive ga

30 sec RINEX3 data for mchl00aus and Geoscience Australia

rinex2snr mchl00aus 2022 15 -orb rapid -samplerate 30 -nolook T

This should analyze a RINEX 3 file if it exists in your local working directory. it will not search anywhere else for the file. It should be a 30 sec, 1 day file for this example

rinex2snr mchl00aus 2022 15 -orb rapid -samplerate 1 -nolook T -stream S

This should analyze a RINEX 3 file if it exists in your local working directory. it will not search anywhere else for the file. It should be a 1 sec, 1 day file for this example with S being set for streaming in the filename.

rinex2snr warn00deu 2023 87 -dec 5 -rate high -samplerate 1 -orb rapid -archive bkg-igs -stream S

1 sec data for warn00deu, 1 sec decimated to 5 sec, multi-GNSS, bkg IGS archive, streamed

rinex2snr tgho 2019 1 -doy_end 365 -archive nz

example for multiday SNR file creation

Parameters

- **station** (*str*) – 4 or 9 character ID of the station, preferably lowercase
- **year** (*int*) – Year
- **doy** (*int*) – Day of year
- **snr** (*int*, *optional*) – SNR format. This tells the code what elevation angles to save data for. Will be the snr file ending. value options:
 - 66 (default) : saves all data with elevation angles less than 30 degrees
 - 99 : saves all data with elevation angles between 5 and 30 degrees
 - 88 : saves all data

50 : saves all data with elevation angles less than 10 degrees

- **orb** (*str*, *optional*) – Which orbit files to download. Value options:
 - gps (default) : will use GPS broadcast orbit
 - gps+glos : will use JAXA orbits which have GPS and Glonass (usually available in 48 hours)
 - gnss : use GFZ final orbits, which is multi-GNSS (available in 3-4 days?), but from CDDIS archive
 - gnss-gfz : GFZ orbits downloaded from GFZ instead of CDDIS, but do they include beidou?. Same as gnss3?
 - nav : GPS broadcast, perfectly adequate for reflectometry. Same as gps.
 - igs : IGS precise, GPS only
 - igr : IGS rapid, GPS only
 - jax : JAXA, GPS + Glonass, within a few days, missing block III GPS satellites
 - gbm : GFZ Potsdam, multi-GNSS, not rapid, via CDDIS
 - grg : French group, GPS, Galileo and Glonass, not rapid
 - esa : ESA, multi-GNSS
 - gfr : GFZ rapid, GPS, Galileo and Glonass, since May 17 2021
 - rapid : GFZ rapid, multi-GNSS
 - ultra : GFZ ultra-rapid, multi-GNSS
- **rate** (*str*, *optional*) – The data rate. Rather than numerical value, this tells the code which folder to use value options:
 - low (default) : standard rate data. Usually 30 sec, but sometimes 15 sec.
 - high : high-rate data
- **dec** (*int*, *optional*) – Decimation rate. 0 is default.
- **fortran** (*bool*, *optional*) – Whether to use fortran to translate the rinex files.
- **nolook** (*bool*, *optional*) – tells the code to retrieve RINEX files from your local machine
- **archive** (*str*, *optional*) – Select which archive to get the files from. Default is all value options:
 - bev : (Austria Federal Office of Metrology and Surveying)
 - bfg : (German Agency for water research, only Rinex 3, requires password)
 - bkg-igs : EUREF for (German Agency for Cartography and Geodesy)
 - bkg-euref : IGS for (German Agency for Cartography and Geodesy)
 - cddis : (NASA's Archive of Space Geodesy Data)
 - ga : (Geoscience Australia)
 - gfz : (GFZ, Germany)
 - ignes : IGN in Spain, only RINEX 3
 - jp : (GSI, Japan requires password)
 - jeff : (My good friend Professor Freymueller!)

ngs : (National Geodetic Survey, USA)

nrcan : (Natural Resources Canada)

nz : (GNS, New Zealand)

sonel : (?)

sopac : (Scripps Orbit and Permanent Array Center)

special : (set aside files at UNAVCO for reflectometry users)

unavco : (University Navstar Consortium, now Earthscope)

all : (searches sopac, unavco, and sonel)

- **doy_end** (*int*, *optional*) – end day of year to be downloaded.
- **year_end** (*int*, *optional*) – end year.
- **overwrite** (*bool*, *optional*) – Make a new SNR file even if one already exists (overwrite existing file). Default is False.
- **translator** (*str*, *optional*) – hybrid (default) : uses a combination of python and fortran to translate the files.
fortran : uses fortran to translate (requires the fortran translator executable)
python : uses python to translate. (Warning: This can be very slow)
- **srate** (*int*, *optional*) – sample rate for RINEX 3 only. Default is 30.
- **mk** (*bool*, *optional*) – Default is False. Use True for uppercase station names and for the non-standard file structure preferred by some users. Look at the function `the_makan_option` in `rinex2snr.py` for more information. The general requirement is that your RINEX 2.11 file should be normal RINEX or gzipped normal RINEX. This flag allows access to Hatanaka/compressed files stored locally and in `$REFL_CODE/YYYY/snr/ssss` where `YYYY` is the year and `ssss` is station name
- **weekly** (*bool*, *optional*) – Takes 1 out of every 7 days in the `doy-doy_end` range (one file per week) - used to save cpu time. Default is False.
- **strip** (*bool*, *optional*) – Reduces observables since the translator does not allow more than 25 Default is False.
- **screenstats** (*bool*, *optional*) – if true, prints more information to the screen
- **gzip** (*bool*, *optional*) – default is true, SNR files are gzipped after creation.

gnssrefl.rinex3_rinex2 module

Translates rinex3 to rinex2. relies on `gfzrn`

`gnssrefl.rinex3_rinex2.main()`

Converts a RINEX 3 file into a RINEX 2.11 file. Uses `gfzrn`.

Parameters

- **rinex3** (*str*) – filename for RINEX 3 file
- **rinex2** (*str*, *optional*) – filename for RINEX 2.11 file
- **dec** (*integer*, *optional*) – decimation value (seconds)
- **gpsonly** (*bool*, *optional*) – whether to remove everything except GPS. Default is False

gnssrefl.rinex3_snr module

`gnssrefl.rinex3_snr.main()`

Creates SNR file from RINEX 3 file that is stored locally Requires the `gfzrn` executable to be available.

Parameters

- **rinex3** (*str*) – name of RINEX3 file
- **orb** (*str*) – optional orbit choice. default is `gbm`
- **snr** (*int*) – snr file choice. default is 66

gnssrefl.rinex_coords module

`gnssrefl.rinex_coords.main()`

checks the first 100 lines of a rinex file in a quest to determine the approximate Cartesian coordinates, which are also displayed on the screen in LLH. It does not care if it is rinex, hatanaka rinex, or rinex3. But it does require it to not be gzipped or unix compressed. If you would like that option, please submit a PR.

Example

```
rinex_coords p1013550.22o
```

gnssrefl.rinpy module

exception `gnssrefl.rinpy.RinexError`

Bases: `Exception`

`gnssrefl.rinpy.getrinexversion(filename)`

Scan the file for RINEX version number.

Parameters

filename (*str*) – Filename of the rinex file

Returns

version – Version number.

Return type

`str`

`gnssrefl.rinpy.loadrinexfromnpz(npzfile)`

Load data previously stored in npz-format

Parameters

npzfile (*str*) – Path to the stored data.

Returns

observationdata, satlists, prntoidx, obstypes, header, obstimes – Data in the same format as returned by `processrinexfile`

Return type

`dict`

`gnssrefl.rinpy.mergerinexfiles(filelist, savefile=None)`

Process several rinexfiles and merges them into one file.

Can be used to for example merge several rinexfiles from the same day to a single file. All files must be from the same receiver and have the same version. No guarantees are given if files are from different receivers.

!!! Currently only functional for RINEX3. !!!

Parameters

- **filename** (*str*) – Filename of the rinex file
- **savefile** (*str*, *optional*) – Name of file to save data to. If supplied the data is saved to a compressed npz file.

Returns

- **observationdata** (*dict*) – Dict with a nobs x nsats x nobstypes nd-array for each satellite constellation containing the measurements. The keys of the dict correspond to the systemletter as used in RINEX files (G for GPS, R for GLONASS, etc).

nobs is the number of observations in the RINEX data, nsats the number of visible satellites for the particular system during the whole measurement period, and nobstypes is the number of different properties recorded.

- **satlists** (*dict*) – Dict containing the full list of visible satellites during the whole measurement period for each satellite constellation.
- **prntoidx** (*dict*) – Dict which for each constellation contains a dict which translates the PRN number into the index of the satellite in the observationdata array.
- **obstypes** (*dict*) – Dict containing the observables recorded for each satellite constellation.
- **header** (*dict*) – Dict containing the header information from the first RINEX file.
- **obstimes** (*list[datetime.datetime]*) – List of time of measurement for each measurement epoch.

`gnssrefl.rinpy.processrinexfile(filename, savefile=None)`

Process a RINEX file into python format

Parameters

- **filename** (*str*) – Filename of the rinex file
- **savefile** (*str*, *optional*) – Name of file to save data to. If supplied the data is saved to a compressed npz file.

Returns

- **observationdata** (*dict*) – Dict with a nobs x nsats x nobstypes nd-array for each satellite constellation containing the measurements. The keys of the dict correspond to the systemletter as used in RINEX files (G for GPS, R for GLONASS, etc).

nobs is the number of observations in the RINEX data, nsats the number of visible satellites for the particular system during the whole measurement period, and nobstypes is the number of different properties recorded.

- **satlists** (*dict*) – Dict containing the full list of visible satellites during the whole measurement period for each satellite constellation.
- **prntoidx** (*dict*) – Dict which for each constellation contains a dict which translates the PRN number into the index of the satellite in the observationdata array.
- **obstypes** (*dict*) – Dict containing the observables recorded for each satellite constellation.

- **header** (*dict*) – Dict containing the header information from the RINEX file.
- **obstimes** (*list[datetime.datetime]*) – List of time of measurement for each measurement epoch.

`gnssrefl.rinpy.readheader(lines, rinexversion)`

`gnssrefl.rinpy.saverinextonpz(savefile, observationdata, satlists, prntoidx, obstypes, header, obstimes)`

Save data to numpy's npz format.

Parameters

- **savefile** (*str*) – Path to where to save the data.
- **observationdata** (*dict*) – Data as returned from processrinexfile
- **satlists** (*dict*) – Data as returned from processrinexfile
- **prntoidx** (*dict*) – Data as returned from processrinexfile
- **obstypes** (*dict*) – Data as returned from processrinexfile
- **header** (*dict*) – Data as returned from processrinexfile
- **obstimes** (*dict*) – Data as returned from processrinexfile

See also:

[*processrinexfile*](#)

`gnssrefl.rinpy.separateobservables(observationdata, obstypes)`

Parameters

- **observationdata** (*dict*) – Data dict as returned by processrinexfile, or loadrinexfromnpz.
- **obstypes** (*dict*) – Dict with observation types for each system as returned by processrinexfile, or loadrinexfromnpz.

Returns

separatedobservationdata – Dict for each system where the data for each observable is separated into its own dict. I.e. to access the P1 data for GPS from a RINEX2 file it is only necessary to write `separatedobservationdata['G']['CI']`.

Return type

dict

gnssrefl.rt_rinex3_snr module

`gnssrefl.rt_rinex3_snr.main()`

Creates SNR file from RINEX 3 file that is stored locally in makan folders It may allow crx - I am not sure. Only allows GFZ ultra orbit files

Parameters

rinex3 (*str*) – name of filename

gnssrefl.smoosh module

`gnssrefl.smoosh.main()`

Decimates and strips out SNR data from a RINEX 2.11 file. Only RINEX, no Hatanaka RINEX or gzipped files allowed. If you would like to add these features, please submit a PR.

Examples

smoosh p0410010.22o 5

decimates a highrate rinex 2.11 file to 5 seconds

smoosh p0410010.22o 5 -snr T

also eliminates all observation types except for SNR

Parameters

- **rinex** (*str*) – rinex 2.11 filename
- **dec** (*int*) – decimation value in seconds
- **snr** (*bool*, *optional*) – whether you want only SNR observables helpful when you have too many observables in your file.

gnssrefl.smoosh_snr module

`gnssrefl.smoosh_snr.main()`

decimates a SNR file

Examples

smoosh_snr p041 2015 175 5

decimates an existing SNR file (year 2015 and day of year 175) to 5 seconds

Parameters

- **station** (*str*) – four ch station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **dec** (*int*) – decimation value in seconds
- **snr** (*int*, *optional*) – snr file name, i.e. 99 or 10, default is 66
- **doy_end** (*int*, *optional*) – allows you to analyze data from doym to doym_end

gnssrefl.snow_functions module

`gnssrefl.snow_functions.snow_azimuthal(station, gps, year, longer, doy1, doy2, bs, plt, end_dt, outputpng, outputfile, minS, maxS, barereq_days, end_doy)`

azimuthal snow depth algorithm tries to determine the bare soil correction in 20 degree azimuth swaths

Parameters

- **station** (*str*) – 4 ch station name
- **gps** (*numpy array*) – output of daily average RH file (year,doy,RH etc)
- **year** (*int*) – water year
- **longer** (*bool*) – whether you want the plot to include late summer
- **doy1** (*int*) – day of year, beginning of bare soil
- **doy2** (*int*) – day of year, ending of bare soil
- **bs** (*int*) – bare soil year
- **plt** (*bool*) – whether you want the plots displayed to the screen
- **end_dt** (*datetime*) – I think this is the datetime for the optional end of the plot
- **outputpng** (*str*) – name of the output (plot) png file
- **outputfile** (*str*) – name of the output snowdepth txt file
- **minS** (*float*) – minimum snowdepth for plot (m)
- **maxS** (*float*) – maximum snowdepth for plot (m)
- **barereq_days** (*int*) – number of days required to trust a bare soil average
- **end_doy** (*int*) – last day of year you want to compute snow depth for

`gnssrefl.snow_functions.snow_simple(station, gps, year, longer, doy1, doy2, bs, plt, end_dt, outputpng, outputfile, minS, maxS, barereq_days, end_doy)`

simple snow depth algorithm

Parameters

- **station** (*str*) – 4 ch station name
- **gps** (*numpy array*) – output of daily average RH file (year,doy,RH etc)
- **year** (*int*) – water year
- **longer** (*bool*) – whether you want the plot to include late summer
- **doy1** (*int*) – day of year, beginning of bare soil
- **doy2** (*int*) – day of year, ending of bare soil
- **bs** (*int*) – bare soil year
- **plt** (*bool*) – whether you want the plots displayed to the screen
- **end_dt** (*datetime*) – I think this is the datetime for the optional end of the plot
- **outputpng** (*str*) – name of the output (plot) png file
- **outputfile** (*str*) – name of the output snowdepth txt file
- **minS** (*float*) – minimum snowdepth for plot (m)
- **maxS** (*float*) – maximum snowdepth for plot (m)

- **barereq_days** (*int*) – min number of days to believe a bare soil average
- **end_doy** (*int*) – last day of year you want a snow depth value for

`gnssrefl.snow_functions.snowplot(station, gobst, snowAccum, yerr, left, right, minS, maxS, outputpng, pltit, end_dt)`

creates and displays snow depth plot. Saves to outputpng

Parameters

- **station** (*str*) – name of GNSS station
- **gobts** (*datetime object*) – time of measurements in datetime format
- **snowAccum** (*numpy array*) – snow depth (meters)
- **yerr** (*numpy array*) – snow depth error (meters)
- **left** (*datetime obj*) – min x-axis limit
- **right** (*datetime obj*) – max x-axis limit
- **minS** (*float*) – minimum snow depth (m)
- **maxS** (*float*) – maximum snow depth (m)
- **outputpng** (*str*) – name of output png file
- **pltit** (*bool*) – whether plot should be displayed to the screen
- **end_dt** (*datetime*) – user provided override date for the end of the plot if None, then ignore

`gnssrefl.snow_functions.time_limits(wateryear, longer, end_doy)`

pick up some time values for windowing RH/snow depth data

Parameters

- **wateryear** (*int*) – water year
- **longer** (*bool*) – whether you want a longer plot
- **end_doy** (*int*) – last day of the year in the water year you want snow depth calculated for

Returns

- **starting** (*float*) – start time, fractional (year + doy/365.25)
- **ending** (*float*) – end time, fractional (year + doy/365.25)
- **left** (*datetime*) – beginning for the plot in datetime
- **right** (*datetime*) – end for the plot in datetime

`gnssrefl.snow_functions.writeout_azim(station, outputfile, usegps, snowAccum)`

writes plain txt file with snow depth results this is for the azimuth leveling version

Parameters

- **station** (*str*) – 4 char station name
- **outputfile** (*str*) – location of output file (plain txt)
- **usegps** (*numpy array*) – LSP results (year, doy, RH etc)
- **snowAccum** (*numpy array*) – snow accumulation results in meters

Returns

- **gobst** (*numpy array*) – datetime useful for plotting

- **snowAccum** (*numpy array*) – snow depth that has passed QC (meters)
- **snowAccumError** (*numpy array*) – standard deviation of daily snow depth retrievals (meters)

`gnssrefl.snow_functions.writeout_snowdepth_v0(station, outputfile, usegps, snowAccum, yerr)`

writes plain txt file with snow depth results

Parameters

- **station** (*str*) – 4 char station name
- **outputfile** (*str*) – location of output file (plain txt)
- **usegps** (*numpy array*) – LSP results (year, doy, RH etc)
- **snowAccum** (*numpy array*) – snow accumulation results in meters
- **yerr** (*numpy array*) – standard deviation of snow depth in meters

Returns

gobst – datetime useful for plotting

Return type

numpy array

gnssrefl.snowdepth_cl module

`gnssrefl.snowdepth_cl.main()`

`gnssrefl.snowdepth_cl.parse_arguments()`

`gnssrefl.snowdepth_cl.snowdepth(station: str, year: int, minS: float = None, maxS: float = None, longer: bool = False, plt: bool = True, bare_date1: str = None, bare_date2: str = None, plt_enddate: str = None, simple: bool = False, medfilter: float = None, ReqTracks: int = None, barereq_days: int = 15, fr: int = None, hires_figs: bool = False)`

Calculates snow depth for a given station and water year. Before you run this code you must have run gnssir for each day of interest.

You can then run `daily_avg` to concatenate the results or you can input appropriate values to optional inputs `medfilter` and `ReqTracks`.

Currently set for northern hemisphere constraints. This could easily be fixed for the southern hemisphere by reading the json input file. Default values use the median of September results to set “bare soil value” These can be overridden with `bare_date1` and `bare_date2` (as one would do in Alaska)

Output is currently written to a plain text file and a plot is written to a png file. Both are located in the `$REFL_CODE/Files/station` directory

If `simple` is set to true, the algorithms computes bare soil (and thus snow depth), using all values together. The default defines bare soil values every 10 degrees in azimuth.

Examples

snowdepth p101 2022

would use results from a previous run of daily_avg

snowdepth p101 2022 -medfilter 0.25 -ReqTracks 50

would run daily_avg for you using 50 tracks/0.25 meter median filter

Parameters

- **station** (*str*) – 4 character station name
- **year** (*int*) – water year (i.e. jan-june of that year and oct-dec of the previous year)
- **minS** (*float, optional*) – minimum snow depth for y-axis limit (m), optional
- **maxS** (*float, optional*) – maximum snow depth for y-axis limit (m), optional
- **longer** (*bool, optional*) – whether you want to plot longer time series (useful for Alaskan sites)
- **plt** (*bool, optional*) – whether you want the plot to come to the screen
- **bare_date1** (*str, optional*) – an override for start bare soil definition
- **bare_date2** (*str, optional*) – an override for end bare soil definition
- **plt_enddate** (*str, optional*) – an override for where you want the plot to end earlier than default
- **simple** (*bool, optional*) – whether you want to use simple algoirthm. Default is False which means you use azimuth corrected bare soil values
- **medfilter** (*float, optional*) – to avoid running daily_avg, you can set median filter in meters; this is used to remove large outliers
- **ReqTracks** (*int, optional*) – to avoid running daily_avg, you can set required number of tracks to create a daily average RH
- **barereq_days** (*int, optional*) – how many bare soil days are required to trust the result, default is 15
- **fr** (*int, optional*) – if you want to restrict to a single frequency at the daily-avg stage (1, 20, etc)
- **hires_figs** (*bool, optional*) – whether you want eps instead of png plots

gnssrefl.spline_functions module

`gnssrefl.spline_functions.arc_plots(lspfigs, snrfigs, reflh, pgram, sat, datet, elvlims, elvt, snrdt, azdesc)`

moved these individual plots out of the way

`lspfigs` : bool

`snrfigs` : bool

reflh

[numpy array] reflector heights (m)

pgram

[numpy array] periodogram ?

sat : numpy array

datet : datetime

elvlms

[list of floats] min and max elev angle (deg)

gnssrefl.spline_functions.**datetime2gps**(*dt*)

Parameters

dt (*datetime*) –

Returns

gpstime

Return type

float

gnssrefl.spline_functions.**define_inputfile**(*station, year, doy, snr_ending*)

Parameters

- **station** (*str*) – 4 ch name of station
- **year** (*integer*) –
- **doy** (*int*) – day of year
- **snr_ending** (*int*) – file ending, e.g. 66, 99

Returns

- **snrfile** (*str*) – name of snrfile
- **snrdir** (*str*) – name of output directory
- **yyyy** (*str*) – four character year
- **doy** (*str*) – three character day of year

gnssrefl.spline_functions.**freq_out**(*x, ofac, hifac*)

inputs: x ofac: oversampling factor hifac outputs: two sets of frequencies arrays

gnssrefl.spline_functions.**get_ofac_hifac**(*elevAngles, cf, maxH, desiredPrec*)

computes two factors - ofac and hifac - that are inputs to the Lomb-Scargle Periodogram code. We follow the terminology and discussion from Press et al. (1992) in their LSP algorithm description.

Parameters

- **elevAngles** (*numpy array*) – satellite elevation angles in degrees
- **cf** (*float*) – L-band wavelength/2 in meters
- **maxH** (*float*) – maximum LSP grid frequency in meters
- **desiredPrec** (*float*) – the LSP frequency grid spacing in meters

Returns

- **ofac** (*float*) – oversampling factor
- **hifac** (*float*) – high-frequency factor

gnssrefl.spline_functions.**glonasswlen**(*prn, signal*)

Given PRN, returns glonass wavelength

Parameters

- **prn** (*integer*) – satellite number
- **signal** (*string*) – L1 or L2 for glonass

Returns

wavelength – wavelength for the given signal

Return type

float

`gnssrefl.spline_functions.gps2datenum(gt)`

needs documentation

Parameters

gt (*float*) – gps time

Returns

dn

Return type

datetime?

`gnssrefl.spline_functions.gps2datetime(gt)`

needs documentation

`gnssrefl.spline_functions.invsnr_header(xdir, outfile_type, station, outfile_name)`

Makes header for output of invsnr analysis

Parameters

- **xdir** (*str*) – directory for the output file
- **outfile_type** (*str*) – csv or txt
- **station** (*str*) – 4 character name
- **outfile_name** (*str*) – name of output - if empty string, it uses default

Returns

- **fileID** (*file*) – used for writing to file
- **usetxt** (*bool*) – boolean for the code calling this function to use if you write out special files, they go in the working directory

`gnssrefl.spline_functions.kristine_dictionary(allid, sat, xsignal)`

22feb09 added beidou

`gnssrefl.spline_functions.l2c_15_list(year, doy)`

for given year and day of year, returns a satellite list of L2C and L5 transmitting satellites

to update this numpy array, the data are stored in a simple triple of PRN number, launch year, and launch date.
author: kristine larson date: march 27, 2021 june 24, 2021: updated for SVN78

this should point to gps.py

`gnssrefl.spline_functions.loadsnrfile(snrfile, thedir)`

loads the snr file , but does not pick out the signal. using two functions will make it easier to use more than one frequency

do time modification here now. column 4 is time since GPS began, in seconds

Parameters

- **snrfile** (*str*) – name of the SNR file

- **thedir** (*str*) – location of the SNR file

Returns

snrdata – floats. Time (python col 3) is converted to fake gps time

Return type

numpy array

`gnssrefl.spline_functions.make_wavelength_column(nr, snrdata, signal)`

NEEDS DOCUMENTATION

Parameters

- **nr** (*integer*) – number of rows in snrdata
- **snrdata** (*numpy array*) – snrfile array
- **signal** (*string*) – frequency ‘L1’, ‘L2’, etc

Returns

onecolumn – snr data for the requested signal

Return type

one-d numpy array

`gnssrefl.spline_functions.plot_tracks(rh_arr, rh_dn)`

send the array of LSP results (rh_arr) with time variable for plotting (rh_dn) kl feb09 adding beidou

Parameters

- **rh_arr** (*numpy array*) – data used by inverse code. Need to add desc
- **rh_dn** (*numpy array*) – data used by inverse code. Need to add desc

`gnssrefl.spline_functions.readklsnrtxt(snrfile, thedir, signal)`

parses the contents of a snrfile. The file itself is read in a separate function now; if SNR data are zero for a given signal, the row is eliminated

As of Oct 28, 2023, gzip after reading SNR file

Parameters

- **snrfile** (*str*) – variable with the file contents
- **thedir** (*str*) – directory where it is located
- **signal** (*str*) – ‘L1’, ‘L2’ etc.

Returns

snrdata – 0 : satellite, usual (100 added for glonass, 200 added for galileo) 1 : elev angle, deg 2 : azimuth angle, deg 3 : time in seconds since GPS began 4 : SNR data in db-Hz 5 : new column with wavelength in it, in meters.

Return type

numpy array of floats . Columns defined as:

`gnssrefl.spline_functions.residuals_cubspl_js(inparam, knots, satconsts, signal, snrdt_arr, final_list, Nfreq)`

function needed for snr-fitting inverse analysis js must stand for joakim strandberg ???

this has to be modified for multi-frequency fspecdict and Nfreq 22feb09 added beidou

Parameters

- **inparam** –

- **knots** –
- **satconsts** –
- **signal** –
- **snrdt_arr** –
- **final_list** –
- **Nfreq** –

`gnssrefl.spline_functions.residuals_cubspl_spectral(kval, knots, rh_arr)`

function needed for inverse analysis

Parameters

- **kval** –
- **knots** (*numpy array*) –
- **rh_arr** (*numpy array*) – reflector heights in meters

`gnssrefl.spline_functions.satfreq2waveL(satc, xsignal, fsatnos)`

given satellite constellation ('G', 'E' ...) xsignal ('L1', 'L2' ...) satnos (satellite numbers) 2022feb09 added Beidou.

`gnssrefl.spline_functions.save_lsp_results(datet, maxind, reflh_sub, sat, elvt, azit, pgram_sub, snrdt, pktn, isignal)`

just cleaning up - move the temp_arr definition to a function each column is defined below.

Parameters

- **datet** (*float*) – seconds in GPSish time
- **reflh_sub** (*numpy of floats?*) – windowed rh estimates
- **sat** (*int*) – satellite number
- **elvt** (*numpy array of floats*) – elevation angles(deg)
- **azit** (*numpy array of floats*) – azimuth angles (deg)
- **snrdt** (*numpy array of floats*) – detrended SNR data (DC component removed)
- **pktn** (*float*) – peak 2 noise via Dave Purnell's definition
- **isignal** (*int*) – frequency, 1,2, or 5

Returns

tmp_arr

Return type

numpy array (12 columns)

`gnssrefl.spline_functions.set_refraction_model(station, dmjd, lsp, imodel)`

imodel is 1 for simple refraction model eventually will add other refraction models

Looks like this was copied from other code and should be consolidated ...

Parameters

- **station** (*str*) – 4 ch station name
- **dmjd** (*float*) – modified julian date
- **lsp** (*dictionary*) – station information including latitude and longitude

- **imodel** (*integer*) – set to 1 (time varying off) or 0 (time varying on)

Returns

- **p** (*float*) – pressure (units?)
- **T** (*float*) – temperature in deg C
- **irefr** (*int*) – number value written to output files to keep track of refraction model
- **e** (*float*) – water vapor pressure, hPa

`gnssrefl.spline_functions.signal2list(signal)`

turns signal input (e.g. L1+L2) to a list 22feb09 tried to add more frequencies ...

Returns

signal_list

Return type

str

`gnssrefl.spline_functions.simpleLSP(rhlims, lcar, precision, elvt, sinelvt, snrdt, sat, xsignal, screenstats, fout, pktlim)`

Parameters

- **input** –
- **rhmax** (*rhlims from dave's code (rhmin and)*) –
- **lcar** (*is gnss wavelength in m*) –
- **periodogram** (*precision of the*) –
- **meters** (*in*) –
- **degrees** (*elvt - elevation angles in*) –
- **sinelvt** –
- **angle** (*sine elevation*) –
- **data** (*snrdt - detrended snr*) –

`gnssrefl.spline_functions.smarterWay(a)`

just want to know how many true values there are in the a dictionary and then write them to a list, as in ['G1','G2']
sure to be a better way - but this works for now

`gnssrefl.spline_functions.snr2arcs(station, snrdata, azilims, elvlims, rhlims, precision, year, doy, signal='L1', normalize=False, snrfigs=False, lspfigs=False, polydeg=2, gaptlim=300, pktlim=4, savefile=False, screenstats=False, l2c_only=False, satconsts=['G', 'R', 'E'], **kwargs)`

reads an array of snr data (output from readklsnr.txt) and organises into: reflector height estimates, stats and detrended snr data for inverse analysis

Parameters

- **station** (*str*) – 4 ch station name
- **snrdata** (*numpy array*) – contents of SNR datafile
- **azilims** (*list of floats*) – azimuth angle limits (e.g., [90, 270])
- **elvlims** (*list of floats*) – elevation angle limits (e.g., [5, 30])

- **rhlims** (*list of floats*) – upper and lower reflector height limits (in metres) for quality control
- **signal** (*str*) – default 'L1' (C/A), can also use L2... if want to use L5 or whatever else you need to make some edits
- **normalize** (*bool*) – if you want to normalize the arcs so that they have the same amplitude
- **snrfigs** (*bool*) – if you want to produce some figures of SNR arcs
- **lspfigs** (*bool*) – if you want to produce some figures of Lomb-Scargle Periodograms
- **polydeg** (*float*) – degree of polynomial for DC
- **gaptlim** (*float*) – if there is a gap in time bigger than [gaptlim] seconds in a particular arc then it will be ignored
- **pktnlim** (*float*) – peak to noise ratio qc condition = the peak of the LSP / mean of LSP within the range [rhlims]
- **savefile** (*bool*) – if you want to save the output to a pickle file then use this parameter as the name (string)
- **kwargs** (*see below*) –
- **tempres** (*int*) – if want to use different temporal resolution to input data (in seconds)
- **satconsts** (*default use all given, otherwise specify from ['G', 'R', 'E'] (gps / glonass / galileo)*) –

Returns

- **rh_arr** (*numpy array*) – reflector height estimates and stats
- **snrdt_arr** (*numpy array*) – detrended SNR data for inverse analysis

`gnssrefl.spline_functions.snr2spline(station, year, doy, azilims, elvlims, rhlims, precision, kdt, snrfit=True, signal='L1', savefile=False, doplot=True, rough_in=0.1, **kwargs)`

function analyzes a SNR file and outputs a fitted spline

note that the file must be 24 hours long or it will not work

Parameters

- **station** (*str*) – 4 ch station name
- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **azilims** (*list of floats*) – azimuth angle limits (e.g., [90, 270])
- **elvlims** (*list of floats*) – elevation angle limits (e.g., [5, 30])
- **rhlims** (*list of floats*) – upper and lower reflector height limits (in metres) for quality control e.g., [5, 10] is 5 and 10 m
- **precision** (*float*) – precision of the periodogram (m)
- **kdt** (*float*) – spline knot spacing in seconds
- **day** (*knots are spaced evenly except for at the start and end of the*) –
- **spline** (*The idea is that you would ignore the first and last knots and then you could have a continuous*) –
- **hours** (*if kdt = 2 * 60 * 60 (2)*) –

- **0h** (*then knots at*) –
- **1h** –
- **3h** –
- **21h** (...) –
- **23h** –
- **24h** –
- **spline** –
- **days** (*with knots every 2 hours over multiple*) –
- **snrfit** (*True or False if you want to do inverse modelling of the SNR data*) –
- **signal** ('L1', 'L2', *currently under development*) –
- **savefile** (*set True if you want to save the output to a file*) –
- **doplot** (*set True if you want to produce a plot with the output from the analysis*) –
- **rough_in** (*'roughness' parameter in the inverse modelling of SNR data (see Strandberg et al., 2016)*) –
- **kwargs** (*see below*) –
- **tempres** (*if want to use different temporal resolution to input data (in seconds)*) –
- **satconsts** (*default use all given, otherwise specify from ['G', 'R', 'E'] (gps / glonass / galileo)*) –

Returns

- **invout** (*dictionary*) – outputs from inverse analysis
- *This documentation was provided by the original author, David Purnell*

gnssrefl.subdaily module

`gnssrefl.subdaily.apply_new_constraints(tv, azim1, azim2, ampl, peak2noise, d1, d2, h1, h2)`

cleaning up the main code. this sorts data and applies various “commandline” constraints tv is the full set of results from gnssrefl

Parameters

- **tv** (*numpy array*) – lsp results
- **azim1** (*float*) – min azimuth (deg)
- **azim2** (*float*) – max azimuth (deg)
- **ampl** (*float*) – required amplitude for periodogram
- **peak2noise** (*float*) – require peak2noise criterion
- **d1** (*int*) – min day of year
- **d2** (*int*) – max day of year
- **h1** (*float*) – min reflector height (m)

- **h2** (*float*) – max reflector height (m)

Returns

- **tv** (*numpy array*) – edited from input
- **t** (*numpy of floats*) – crude time for obs, in fractional days
- **rh** (*numpy of floats*) – reflector heights (m)
- **firstdoy** (*int*) – first day of year
- **lastdoy** (*int*) – last day of year

`gnssrefl.subdaily.flipit(tvd, col)`

take RH values from the first and last day and attaches them as fake data to make the spline fit stable. Also fill the temporal gaps with fake data

Parameters

- **tvd** (*numpy array of floats*) – output of LSP runs
- **col** (*integer*) – column number (in normal speak) of the RH results

Returns

- **tnew** (*numpy array of floats*) – time in days of year
- **ynew** (*numpy array*) – RH in meters

`gnssrefl.subdaily.fract_to_obstimes(spl_x)`

this does not seem to be used

Parameters

- **spl_x** (*numpy array*) – fractional time
- **obstimes** (*numpy array*) – datetime format

`gnssrefl.subdaily.mirror_plot(tnew, ynew, spl_x, spl_y, txt_dir, station, beginT, endT)`

Makes a plot of the spline fit to the mirrored RH data Plot is saved to txt_dir as station_rhdot1.png

Parameters

- **tnew** (*numpy of floats*) – time in days of year, including the faked data, used for splines
- **ynew** (*numpy of floats*) – RH in meters
- **spl_t** (*numpy of floats*) – time in days of year
- **spl_y** (*numpy of floats*) – smooth RH, meters
- **station** (*str*) – name of station for title
- **beginT** (*float*) – first time (day of year) real RH measurement
- **endT** (*float*) – last time (day of year) for first real RH measurement
- **extension** (*str*) – name of testing strategy (used in gnssir)

`gnssrefl.subdaily.my_percentile(rh, p1, p2)`

numpy percentile was crashing docker build this is a quick work around

Parameters

- **rh** (*numpy array*) – reflector heights, but could be anything really
- **p1** (*float*) – low percentage (from 0-1)

- **p2** (*float*) – high percentage (from 0-1)

Returns

- **low** (*float*) – low value (using input percentile)
- **highv** (*float*) – high value (using input percentile)

`gnssrefl.subdaily.numsats_plot(station, tval, nval, Gval, Rval, Eval, Cval, txt_dir, fs, hires_figs)`
makes the plot that summarizes the number of satellites in each constellation per epoch

Parameters

- **station** (*str*) – name of the station
- **tval** (*numpy array*) – datetime objects?
- **nval** (*numpy array*) – number of total satellites at a given epoch
- **Gval** (*numpy array*) – number of galileo satellites at an epoch
- **Rval** (*numpy array*) – number of glonass satellites at an epoch
- **Eval** (*numpy array*) – number of galileo satellites at an epoch
- **Cval** (*numpy array*) – number of beidou satellites at an epoch
- **txt_dir** (*str*) – where results are stored
- **fs** (*int*) – fontsize for the plots
- **hires_figs** (*bool*) – try to plot high resolution

`gnssrefl.subdaily.output_names(txt_dir, txtfile, csvfile, jsonfile)`
figures out what the names of the outputs are going to be

Parameters

- **txt_dir** (*str*) – the directory where the results should be written out
- **txtfile** (*str*) – name of the output file
- **csvfile** (*bool*) – cl input whether the output file should be csv format
- **jsonfile** (*bool*) – cl input for whether the output file should be in the json format

Returns

- **writetxt** (*bool*) – whether output should be plain txt
- **writecsv** (*bool*) – whether output should be csv format
- **writejson** (*bool*) – whether output should be json format
- **outfile** (*str*) – output filename

`gnssrefl.subdaily.print_badpoints(t, outliersize, txt_dir, real_residuals)`
prints outliers to a file.

Parameters

- **t** (*numpy array*) – lomb scargle result array of “bad points”. Format given below
- **outliersize** (*float*) – outlier criterion, in meters

Return type

writes to a file called outliers.txt in the Files/station area

`gnssrefl.subdaily.quickTr(year, doy, frachours)`

takes timing from lomb scargle code (year, doy) and UTC hour (fractional) and returns a date string

Parameters

- **year** (*int*) – full year
- **doy** (*int*) – day of year
- **frachours** (*float*) – real-valued UTC hour

Returns

datestring – date ala YYYY-MM-DD HH-MM-SS

Return type

str

`gnssrefl.subdaily.readin_and_plot(station, year, d1, d2, plt2screen, extension, sigma, writecsv, azim1, azim2, ampl, peak2noise, txtfile, h1, h2, kplt, txt_dir, default_usage, hires_figs, fs)`

Reads in RH results and makes various plots to help users assess the quality of the solution

This is basically “section 1” of the code

Parameters

- **station** (*str*) – 4 character station name
- **year** (*int*) – full year
- **d1** (*int*) – first day of year evaluated
- **d2** (*int*) – last day of year evaluated
- **plt2screen** (*bool*) – if True plots are displayed to the screen
- **extension** (*str*) – allow user to specify an extension for results (i.e. gnssir was run using extension string)
- **sigma** (*float*) – how many standard deviations away from mean you allow.
- **writecsv** (*bool*) – whether output is written in csv format.
- **azim1** (*float*) – minimum azimuth value (degrees)
- **azim2** (*float*) – maximum azimuth value (degrees)
- **ampl** (*float*) – minimum LSP amplitude allowed
- **peak2noise** (*float*) – minim peak2noise value to set solution good
- **txtfile** (*str*) – name of plain text output file
- **h1** (*float*) – minimum reflector height (m)
- **h2** (*float*) – maximum reflector height (m)
- **kplt** (*bool*) – special plot made
- **txt_dir** (*str*) – directory where the results will be written
- **default_usage** (*bool*) – flat as to whether you are using this code for subdaily or for rh_plot. this changes the plots a bit.
- **hires_figs** (*bool*) – whether to switch from png to eps
- **fs** (*int*) – fontsize for figure axes

Returns

- **tv** (*numpy array*) – LSP results (augmented)
- **otimes** (*datetime object*) – times of observations
- **fname** (*str*) – initial result file - collated
- **fname_new** (*str*) – result file with outliers removed

`gnssrefl.subdaily.rh_plots(otimes, tv, station, txt_dir, year, d1, d2, percent99)`

overview plots for rh_plot

Parameters

- **otimes** (*numpy array of datetime objects*) – observations times
- **tv** (*numpy array*) – gnssrefl results written into this variable using loadtxt
- **station** (*str*) – station name, only used for the title
- **txt_dir** (*str*) – where the plots will be written to
- **year** (*int*) – what year is being analyzed
- **d1** (*int*) – minimum day of year
- **d2** (*int*) – maximum day of year
- **percent99** (*bool*) – whether you want only the 1-99 percentile plotted

`gnssrefl.subdaily.rhdot_correction2(station, fname, fname_new, pltit, outlierV, outlierV2, **kwargs)`

Improved code to compute rhdot correction and bias correction for subdaily

Parameters

- **station** (*str*) – 4 char station name
- **fname** (*str*) – input filename for results
- **fname_new** (*str*) – output filename for results
- **pltit** (*bool*) – whether you want plots to the screen
- **outlierV** (*float*) – outlier criterion, in meters used in first go thru if None, then use 3 sigma (which is the default)
- **outlierV2** (*float*) – outlier criterion, in meters used in second go thru if None, then use 3 sigma (which is the default)
- **delta_out** (*float, optional*) – seconds for smooth output
- **txt_dir** (*str*) – if wanting to set your own output directory
- **apply_if_corr** (*bool, optional*) – whether you want to apply the IF correction default is true
- **apply_rhdot** (*bool, optional*) – whether you want to apply the rhdot correction default is true

`gnssrefl.subdaily.rhdot_plots(th, correction, rhdot_at_th, tvel, yvel, fs, station, txt_dir, hires_figs)`

make rhdot correction plots

Parameters

- **th** (*numpy array*) – time of obs, day of year
- **correction** (*numpy array*) – rhcorrections in meters

- **rhdot_at_th** (*numpy array of floats*) – spline fit for rhdot in meters
- **tvel** (*numpy array of floats*) – time for surface velocity in days of year
- **yvel** (*numpy array of floats*) – surface velocity in m/hr
- **fs** (*integer*) – fontsize
- **station** (*str*) – station name
- **txtdir** (*str*) – file directory for output
- **hires_figs** (*bool*) – whether you want eps instead of png

`gnssrefl.subdaily.spline_in_out(x, y, knots_per_day)`

Parameters

- **x** (*numpy of floats*) – time of observations in fractional days
- **y** (*numpy of floats*) – reflector heights in meters
- **knots_per_day** (*int*) – number of knots per day

Returns

- **xx** (*numpy of floats*) – regularly spaced observations
- **spline(xx)** (*numpy of floats*) – spline value at those times

`gnssrefl.subdaily.stack_two_more(otimes, tv, ii, jj, stats, station, txtdir, sigma, kplt, hires_figs)`

makes a plot of the reflector heights before and after minimal editing

Parameters

- **otimes** (*numpy array of datetime objects*) – observation times
- **tv** (*numpy array*) – variable with the gnssrefl LSP results
- **ii** (*numpy array*) – indices of good data
- **jj** (*numpy array*) – indices of bad data
- **station** (*str*) – station name
- **txtdir** (*str*) – directory where plots will be written
- **sigma** (*float*) – what kind of standard deviation is used for outliers (3sigma, 2.5 sigma etc)
- **kplt** (*bool*) – make extra plot for kristine

`gnssrefl.subdaily.testing_nvals(Gval, Rval, Eval, Cval)`

writing the number of observations per constellation as a test. not currently used

Parameters Gval: numpy array

GPS RH values

Rval

[numpy array] GLONASS RH values

Eval

[numpy array] Galileo RH values

Cval

[numpy] Beidou RH values

writes to a file - kristine.txt returns nothing

`gnssrefl.subdaily.two_stacked_plots(otimes, tv, station, txtdir, year, d1, d2, hires_figs)`

This actually makes three stacked plots - not two, LOL It gives an overview for quality control

Parameters

- **otimes** (*numpy array of datetime objects*) – observations times
- **tv** (*numpy array*) – gnssrefl results written into this variable using loadtxt
- **station** (*str*) – station name, only used for the title
- **txtdir** (*str*) – where the plots will be written to
- **year** (*int*) – what year is being analyzed
- **d1** (*int*) – minimum day of year
- **d2** (*int*) – maximum day of year
- **hires_figs** (*bool*) – true for eps instead of png

`gnssrefl.subdaily.write_out_header(fout, station, extraline, **kwargs)`

writes out header for results file ...

Parameters

- **fout** (*fileID*) –
- **station** (*str*) – 4 character station name
- **extraline** (*bool*) – not sure why this is here

`gnssrefl.subdaily.write_subdaily(outfile, station, ntv, writcsv, extraline, **kwargs)`

writes out the subdaily results. currently only works for plain txt

Parameters

- **input** (*str*) – output filename
- **station** (*str*) – 4 character station name, lowercase
- **ntv** (*numpy multi-dimensional*) – the variable with the LSP results read via np.loadtxt
- **writcsv** (*bool*) – whether the file output is csv
- **extraline** (*bool*) – whether the header has an extra line

`gnssrefl.subdaily.writejsonfile(ntv, station, outfile)`

subdaily RH values written out in json format

Parameters

- **ntv** (*numpy of floats*) – LSP results
- **station** (*str*) – 4 ch station name
- **outfile** (*str*) – filename for output

`gnssrefl.subdaily.writeout_spline_outliers(tvd_bad, txtdir, residual, filename)`

Write splinefit outliers to a text file.

Parameters

- **tvd_bad** (*numpy array*) – output of the lomb scargle calculations
- **txtdir** (*str*) – directory for the output, i.e. \$REFL_CODE/FiLes/station
- **residual** (*numpy array*) – outlier in units of meters (!)

- **filename** (*str*) – name of file being written

gnssrefl.subdaily_cl module

gnssrefl.subdaily_cl.**main**()

gnssrefl.subdaily_cl.**parse_arguments**()

gnssrefl.subdaily_cl.**subdaily**(*station: str, year: int, txtfile_part1: str = "", txtfile_part2: str = None, csvfile: bool = False, plt: bool = True, spline_outlier1: float = None, spline_outlier2: float = None, knots: int = 8, sigma: float = 2.5, extension: str = "", rhdot: bool = True, doy1: int = 1, doy2: int = 366, testing: bool = True, ampl: float = 0, h1: float = 0.4, h2: float = 300.0, azim1: int = 0, azim2: int = 360, peak2noise: float = 0, kplt: bool = False, subdir: str = None, delta_out: int = 1800, if_corr: bool = True, knots_test: int = 0, hires_figs: bool = False, apply_rhdot: bool = True, fs: int = 12*)

Subdaily combines multiple day gnssir solutions and applies relevant corrections. It only works for one year at a time; you can restrict time periods within a year with -doy1 and -doy2

WARNING: this code is meant to be used at sites with tidal signals. If you have a site without it, you should probably use daily_avg instead. If you insist on using this code on such sites (rivers and lakes), you should think about how this code is implemented - it is using splines with 8 knots as the default (i.e. knot every three hours). This is very unlikely to be acceptable for a lake or non-tidal river. You should change the knot setting.

WARNING: this code calculates and applies various corrections. New Reflector Height values are added to the output files as new columns. If you run the code but continue to assume the “good answers” are in column 2, you are essentially not using the code at all.

Examples

subdaily at01 2023 -plt F

for station at01, all solutions in 2023 but no plots to the screen

subdaily at01 2023 -doy1 15 -doy2 45

for all solutions in 2023 between days of year 15 through 45

subdaily at01 2023 -h2 14 -if_corr F

for all solutions in 2023 but with max RH set to 14 meters and interfrequency correction not applied

The code has two sections.

I. Summarize the retrievals (how many retrievals per constellation), identify and remove gross outliers. provide plots to allow a user to evaluate Quality Control parameters. The solutions can further be edited from the command line (i.e. restrict the RH using -h1 and -h2, in meters, or azimuths using -azim1 and -azim2)

II. This section has the following goals:

- removes more outliers based on a spline fit to the RH retrievals
- calculates and applies RHdot
- removes an interfrequency (IF) bias. All solutions are then relative to GPS L1.

txtfile_part1 is optional input if you want to skip part 1 and use your own file (but in the same format).

txtfile_part2 is optional input to the second part of the code.

Parameters

- **station** (*str*) – 4 character id of the station.
- **year** (*int*) – full year
- **txtfile_part1** (*str*, *optional*) – input File name.
- **txtfile_part2** (*str*, *optional*) – Input filename for rhdot/spline fitting
- **csvfile** (*boolean*, *optional*) – Set to True if you prefer csv to plain txt. default is False.
- **plt** (*bool*, *optional*) – To print plots to screen or not. default is TRUE.
- **spline_outlier1** (*float*, *optional*) – Outlier criterion used in first splinefit, before RHdot (m)
- **spline_outlier2** (*float*, *optional*) – Outlier criterion used in second splinefit, after IF & RHdot (meters)
- **knots** (*integer*, *optional*) – Knots per day, spline fit only. default is 8.
- **sigma** (*float*, *optional*) – Simple sigma outlier criterion (e.g. 1 for 1sigma, 3 for 3sigma) default is 2.5
- **extension** (*str*, *optional*) – Solution subdirectory. default is empty string.
- **rhdot** (*bool*, *optional*) – Set to True to turn on spline fitting for RHdot correction. default is True.
- **doy1** (*int*, *optional*) – Initial day of year, default is 1.
- **doy2** (*int*, *optional*) – End day of year. Default is 366.
- **testing** (*bool*, *optional*) – Set to False for older code. default is now True.
- **ampl** (*float*, *optional*) – New amplitude constraint. Default is 0.
- **azim1** (*int*, *optional*) – minimum azimuth. Default is 0.
- **azim2** (*int*, *optional*) – Max azimuth. Default is 360.
- **h1** (*float*, *optional*) – lowest allowed reflector height in meters. Default is 0.4
- **h2** (*float*, *optional*) – highest allowed reflector height in meters. Default is 300
- **peak2noise** (*float*, *optional*) – New peak to noise constraint. Default is 0.
- **kplt** (*bool*, *optional*) – plot for kristine
- **subdir** (*str*, *optional*) – name for output subdirectory in REFL_CODE/Files
- **delta_out** (*int*, *optional*) – how frequently - in seconds - you want smooth spline model output written default is 1800 seconds
- **if_corr** (*bool*, *option*) – whether you want the inter-frequency removed default is true
- **hires_figs** (*bool*, *optional*) – whether high resolution figures are made
- **apply_rhdot** (*bool*, *optional*) – whether you want the RH dot correction applied for a lake or river you would not want it to be.
- **fs** (*int*, *optional*) – fontsize for Figures. default is 12 for now.

gnssrefl.utils module

class gnssrefl.utils.**FileManagement**(*station*, *file_type*: **FileTypes**, *year*: *int* = *None*, *doy*: *int* = *None*, *file_not_found_ok*: *bool* = *False*)

Bases: object

FileManagement is designed to easily read the files that this package relies on. Required parameters include station and file_type from FileTypes class. Optional parameters are year, doy, and file_not_found_ok.

get_file_path()

Get the path of a specific file from the FileTypes class. Returns file paths requested as a string

read_file(*transpose*=*False*, ***kwargs*)

Reads the requested file and returns results of file as an array. Can use transpose parameter to transpose the results.

class gnssrefl.utils.**FileTypes**(*value*, *names*=*None*, ***, *module*=*None*, *qualname*=*None*, *type*=*None*, *start*=*1*, *boundary*=*None*)

Bases: str, Enum

Files to either read from or save to.

apriori_rh_file = 'apriori_rh_file'

daily_avg_phase_results = 'daily_avg_phase_results'

directory = 'directory'

make_json = 'make_json'

phase_file = 'phase_file'

volumetric_water_content = 'volumetric_water_content'

gnssrefl.utils.**check_environment**()

gnssrefl.utils.**get_sys**()

gnssrefl.utils.**read_files_in_dir**(*directory*, *transpose*=*False*)

Read all files in a given directory. Directory given must be an absolute path. Returns an n-d array of results. Can use optional parameter transpose to transpose the results.

gnssrefl.utils.**set_environment**(*refl_code*, *orbits*, *exe*)

gnssrefl.utils.**str2bool**(*args*, *expected_bools*)

gnssrefl.utils.**validate_input_datatypes**(*obj*, ***kwargs*)

gnssrefl.veg_multiyr module

kristine larson combine multiple years of teqc multipath metrics, write a file, and make a plot

gnssrefl.veg_multiyr.**in_winter**(*d*)

(td testing autodoc api generation)

pretty silly winter screen tool

Parameters

d (*int*) – day of year

Returns

True if doy is in winter, False if not considered “winter”.

Return type

bool

`gnssrefl.veg_multiyr.main()`

command line interface for download_rinex

`gnssrefl.veg_multiyr.newvegplot(vegout, station)`

send the file name and try to make a plot segregating for changes in teqc metric and receiver type

`gnssrefl.veg_multiyr.vegoutfile(station)`

make sure directories exist for prelim veg output file returns name of the otuput file

gnssrefl.vwc module

`gnssrefl.vwc.main()`

`gnssrefl.vwc.parse_arguments()`

`gnssrefl.vwc.vwc(station: str, year: int, year_end: int = None, fr: int = 20, plt: bool = True, screenstats: bool = False, min_req_pts_track: int = 50, polyorder: int = -99, minvalperday: int = 10, snow_filter: bool = False, circles: bool = False, subdir: str = None, tmin: str = None, tmax: str = None, warning_value: float = 5.5, auto_removal: bool = False)`

Computes VWC from GNSS-IR phase estimates. It concatenates previously computed phase results, makes plots for the four geographic quadrants, computes daily average phase files before converting to volumetric water content (VWC).

Examples

vwc p038 2017

one year for station p038

vwc p038 2015 -year_end 2017

three years for station p038

vwc p038 2015 -year_end 2017 -warning_value 6

warns you about tracks greater than 6 degrees rms

vwc p038 2015 -year_end 2017 -warning_value 6 -auto_removal

makes new list of tracks based on your new warning value

Parameters

- **station** (*str*) – 4 character ID of the station
- **year** (*int*) – full Year
- **year_end** (*int*, *optional*) – last year for analysis
- **fr** (*integer*, *optional*) – GNSS frequency. Currently only supports l2c. Default is 20 (l2c)
- **plt** (*bool*, *optional*) – Whether to produce plots to the screen. Default is True
- **min_req_pts_track** (*int*, *optional*) – how many points needed to keep a satellite track default is 50

- **polyorder** (*int*) – polynomial order used for leveling. Usually the code picks it but this allows to users to override. Default is -99 which means let the code decide
- **minvalperday** (*integer*) – how many phase measurements are needed for each daily measurement default is 10
- **snow_filter** (*boolean*) – whether you want to attempt to remove points contaminated by snow default is False
- **circles** (*boolean*) – whether you want circles in the final plot (lines are default)
- **subdir** (*str*) – subdirectory in \$REFL_CODE/Files for plots and text file outputs
- **tmin** (*str*) – minimum soil texture value, e.g. 0.05
- **tmax** (*str*) – maximum soil texture value, e.g. 0.45
- **warning_value** (*float*) – screen warning about bad tracks (phase rms, in degrees). default is 5.5
- **auto_removal** (*boolean, optional*) – whether to automatically remove tracks that hit your bad track threshold default value is false

Returns

- *Daily phase results in a file at \$REFL_CODE/<year>/phase/<station>_phase.txt* – with columns: Year DOY Ph Phsig NormA MM DD
- *VWC results in a file at \$REFL_CODE/<year>/phase/<station>_vwc.txt* – with columns: FracYr Year DOY VWC Month Day

gnssrefl.vwc_cl module

`gnssrefl.vwc_cl.main()`

`gnssrefl.vwc_cl.parse_arguments()`

`gnssrefl.vwc_cl.vwc(station: str, year: int, year_end: int = None, fr: int = 20, plt: bool = True, screenstats: bool = False, min_req_pts_track: int = 50, polyorder: int = -99, minvalperday: int = 10, snow_filter: bool = False, circles: bool = False, subdir: str = None, tmin: str = None, tmax: str = None, warning_value: float = 5.5, auto_removal: bool = False, hires_figs: bool = False)`

The goal of this code is to compute volumetric water content (VWC) from GNSS-IR phase estimates. It concatenates previously computed phase results, makes plots for the four geographic quadrants, computes daily average phase files before converting to volumetric water content (VWC). It uses the simple vegetation model from Clara Chew's dissertation. For the more advanced vegetation model, we will need a volunteer to convert it from Matlab. It is not a difficult port - but it will require care be taken that it is checked carefully.

Examples

vwc p038 2017

one year for station p038

vwc p038 2015 -year_end 2017

three years of analysis for station p038

vwc p038 2015 -year_end 2017 -warning_value 6

warns you about tracks with phase RMS greater than 6 degrees rms

vw p038 2015 -year_end 2017 -warning_value 6 -auto_removal T
 makes new list of tracks based on your new warning value

Parameters

- **station** (*str*) – 4 character ID of the station
- **year** (*int*) – full Year
- **year_end** (*int*, *optional*) – last year for analysis
- **fr** (*int*, *optional*) – GNSS frequency. Currently only supports l2c. Default is 20 (l2c)
- **plt** (*bool*, *optional*) – Whether to produce plots to the screen. Default is True
- **min_req_pts_track** (*int*, *optional*) – how many points needed to keep a satellite track default is 50
- **polyorder** (*int*) – polynomial order used for leveling. Usually the code picks it but this allows to users to override. Default is -99 which means let the code decide
- **minvalperday** (*integer*) – how many phase measurements are needed for each daily measurement default is 10
- **snow_filter** (*bool*) – whether you want to attempt to remove points contaminated by snow default is False
- **circles** (*bool*) – whether you want circles in the final plot (lines are default)
- **subdir** (*str*) – subdirectory in \$REFL_CODE/Files for plots and text file outputs
- **tmin** (*str*) – minimum soil texture value, e.g. 0.05
- **tmax** (*str*) – maximum soil texture value, e.g. 0.45
- **warning_value** (*float*) – screen warning about bad tracks (phase rms, in degrees). default is 5.5
- **auto_removal** (*boolean*, *optional*) – whether to automatically remove tracks that hit your bad track threshold default value is false
- **hires_figs** (*boolean*, *optional*) – whether to make eps instead of png files default value is false

Returns

- *Daily phase results in a file at \$REFL_CODE/<year>/phase/<station>_phase.txt* – with columns: Year DOY Ph Phsig NormA MM DD
- *VWC results in a file at \$\$REFL_CODE/<year>/phase/<station>_vwc.txt* – with columns: FracYr Year DOY VWC Month Day

gnssrefl.vwc_input module

gnssrefl.vwc_input.**main**()

gnssrefl.vwc_input.**parse_arguments**()

gnssrefl.vwc_input.**vwc_input**(station: str, year: int, fr: int = 20, min_tracks: int = 100)

Starts the analysis for volumetric water content. Picks up reflector height (RH) results for a given station and year-year end range and computes the RH mean values and writes them to a file. These will be used to compute a consistent set of phase estimates.

Examples

vwc_input p038 2018

standard usage, station and year inputs

vwc_input p038 2018 -min_tracks 50

allow fewer values to accept a satellite track default is 100

Parameters

- **station** (*str*) – 4 character ID of the station
- **year** (*int*) – full year
- **fr** (*int*, *optional*) – GPS frequency. Currently only supports 12c, which is frequency 20.
- **min_tracks** (*int*, *optional*) – number of minimum tracks needed in order to keep the average RH

Returns

- *File with columns*
- *index, mean reflector_heights, satellite, average_azimuth, number of reflector heights in average, min azimuth, max azimuth*
- *Saves to \$REFL_CODE/input/<station>_phaseRH.txt*

gnssrefl.xyz2llh module

`gnssrefl.xyz2llh.main()`

Converts Cartesian coordinates to latitude, longitude, ellipsoidal height. Prints to screen

Example

xyz2llh -1283634.1615 -4726427.8931 4074798.0429

returns 39.949492042 -105.194266387 1728.856

Parameters

- **x** (*float*) – X coordinate (m)
- **y** (*float*) – Y coordinate (m)
- **z** (*float*) – Z coordinate (m)

gnssrefl.ydoy module

`gnssrefl.ydoy.main()`

converts year/day of year to month and day. prints to the screen

Parameters

- **year** (*int*) – full year
- **doy** (*int*) – day of year

Returns

- **month** (*int*)

- **day** (*int*)

gnssrefl.ymd module

converts ymd to doy Updated: April 3, 2019

`gnssrefl.ymd.main()`

converts year month day to day of year and prints it to the screen Also does MJD for fun.

Parameters

- **year** (*int*) –
- **month** (*int*) –
- **day** (*int*) –

Returns

doy – three character day of the year

Return type

str

Note: These docs are still under development; feedback is appreciated.

PYTHON MODULE INDEX

g

gnssrefl, 49
gnssrefl.check_rinex_file, 49
gnssrefl.computemplp2, 50
gnssrefl.daily_avg, 51
gnssrefl.daily_avg_cl, 54
gnssrefl.decipher_argt, 56
gnssrefl.download_ioc, 56
gnssrefl.download_noaa, 57
gnssrefl.download_orbits, 59
gnssrefl.download_psm1, 61
gnssrefl.download_rinex, 61
gnssrefl.download_teqc, 63
gnssrefl.download_tides, 63
gnssrefl.download_unr, 64
gnssrefl.download_wsv, 64
gnssrefl.EGM96, 49
gnssrefl.filesizes, 65
gnssrefl.gnssir_cl, 65
gnssrefl.gnssir_input, 67
gnssrefl.gnssir_old, 71
gnssrefl.gnssir_v2, 72
gnssrefl.gps, 77
gnssrefl.gpsweek, 111
gnssrefl.highrate, 111
gnssrefl.installexe_cl, 113
gnssrefl.invsnr_cl, 113
gnssrefl.invsnr_input, 115
gnssrefl.karnak_libraries, 116
gnssrefl.kelly, 120
gnssrefl.llh2xyz, 120
gnssrefl.make_meta, 121
gnssrefl.max_resolve_RH_cl, 122
gnssrefl.mjd, 123
gnssrefl.nmea2snr, 123
gnssrefl.nmea2snr_cl, 126
gnssrefl.nyquist_libs, 127
gnssrefl.phase_functions, 128
gnssrefl.pickle_dilemma, 132
gnssrefl.prn2gps, 132
gnssrefl.query_unr, 133
gnssrefl.quicklib, 139

gnssrefl.quickLook_cl, 133
gnssrefl.quickLook_function, 134
gnssrefl.quickLook_function2, 136
gnssrefl.quickPhase, 138
gnssrefl.quickplt, 139
gnssrefl.read_snr_files, 140
gnssrefl.refl_zones, 142
gnssrefl.refl_zones_cl, 145
gnssrefl.refraction, 147
gnssrefl.rh_plot, 149
gnssrefl.rinex2snr, 150
gnssrefl.rinex2snr_cl, 155
gnssrefl.rinex3_rinex2, 158
gnssrefl.rinex3_snr, 159
gnssrefl.rinex_coords, 159
gnssrefl.rinpy, 159
gnssrefl.rt_rinex3_snr, 161
gnssrefl.smoosh, 162
gnssrefl.smoosh_snr, 162
gnssrefl.snow_functions, 163
gnssrefl.snowdepth_cl, 165
gnssrefl.spline_functions, 166
gnssrefl.subdaily, 173
gnssrefl.subdaily_cl, 180
gnssrefl.utils, 182
gnssrefl.veg_multiyr, 182
gnssrefl.vwc, 183
gnssrefl.vwc_cl, 184
gnssrefl.vwc_input, 185
gnssrefl.xyz2llh, 186
gnssrefl.ydoy, 186
gnssrefl.ymd, 187

A

gnssrefl.gps.wgs84 attribute), 107
 angle_range_positive() (in module *gnss-refl.nmea2snr*), 124
 apply_new_constraints() (in module *gnss-refl.subdaily*), 173
 apply_refraction_corr() (in module *gnss-refl.gnssir_old*), 71
 apply_refraction_corr() (in module *gnss-refl.gnssir_v2*), 72
 apriori_file_exist() (in module *gnss-refl.phase_functions*), 128
 apriori_rh_file (*gnssrefl.utils.FileTypes attribute*), 182
 arc_plots() (in module *gnssrefl.spline_functions*), 166
 arc_scaleF() (in module *gnssrefl.gps*), 78
 avoid_cddis() (in module *gnssrefl.gps*), 78
 azimuth_angle() (in module *gnssrefl.gps*), 78
 azimuth_diff() (in module *gnssrefl.nmea2snr*), 124
 azimuth_diff1() (in module *gnssrefl.nmea2snr*), 124
 azimuth_diff2() (in module *gnssrefl.nmea2snr*), 124
 azimuth_mean() (in module *gnssrefl.nmea2snr*), 124

B

back2thefuture() (in module *gnssrefl.gps*), 79
 bei_L2 (*gnssrefl.gps.constants attribute*), 82
 bei_L5 (*gnssrefl.gps.constants attribute*), 82
 bei_L6 (*gnssrefl.gps.constants attribute*), 82
 bei_L7 (*gnssrefl.gps.constants attribute*), 82
 bfg_data() (in module *gnssrefl.gps*), 79
 bfg_password() (in module *gnssrefl.gps*), 79
 big_Disk_in_DC_hourly() (in module *gnssrefl.gps*), 79
 big_Disk_work_hard() (in module *gnssrefl.gps*), 79
 binary() (in module *gnssrefl.gps*), 80
 bkg_highrate() (in module *gnssrefl.highrate*), 111

C

c (*gnssrefl.gps.constants attribute*), 82
 c (*gnssrefl.rinex2snr.constants attribute*), 150
 calcAzEl_new() (in module *gnssrefl.refl_zones*), 142

calcAzEl_newish() (in module *gnssrefl.refl_zones*), 142
 cdate2nums() (in module *gnssrefl.gps*), 80
 cdate2yday() (in module *gnssrefl.gps*), 80
 cddis_download_2022B() (in module *gnssrefl.gps*), 80
 cddis_download_2022B_new() (in module *gnss-refl.gps*), 80
 cddis_highrate() (in module *gnssrefl.highrate*), 111
 cddis_password() (in module *gnssrefl.gps*), 80
 cddis_restriction() (in module *gnssrefl.gps*), 80
 char_month_converter() (in module *gnssrefl.gps*), 81
 check_azim_compliance() (in module *gnss-refl.gnssir_v2*), 73
 check_directories() (in module *gnss-refl.computempImp2*), 50
 check_envron_variables() (in module *gnss-refl.gps*), 81
 check_environment() (in module *gnssrefl.utils*), 182
 check_inputs() (in module *gnssrefl.gps*), 81
 check_l2() (in module *gnssrefl.check_rinex_file*), 49
 check_navexistence() (in module *gnssrefl.gps*), 82
 check_offsets() (in module *gnssrefl.make_meta*), 121
 check_rinex_file() (in module *gnss-refl.check_rinex_file*), 49
 checkEGM() (in module *gnssrefl.gps*), 81
 checkexist() (in module *gnssrefl.installexe_cl*), 113
 checkFiles() (in module *gnssrefl.gps*), 81
 colorful() (in module *gnssrefl.quickLook_function2*), 136
 compress_snr_files() (in module *gnss-refl.read_snr_files*), 140
 confused_obstimes() (in module *gnssrefl.gps*), 82
 constants (class in *gnssrefl.gps*), 82
 constants (class in *gnssrefl.rinex2snr*), 150
 conv2snr() (in module *gnssrefl.rinex2snr*), 150
 convert_phase() (in module *gnssrefl.phase_functions*), 128
 corr_el_angles() (in module *gnssrefl.refraction*), 147

D

daily_avg() (in module *gnssrefl.daily_avg_cl*), 54

- daily_avg_phase_results (gnssrefl.utils.FileTypes attribute), 182
 daily_avg_stat_plots() (in module gnss-refl.daily_avg), 51
 daily_phase_plot() (in module gnss-refl.phase_functions), 128
 datetime2gps() (in module gnssrefl.spline_functions), 167
 dec31() (in module gnssrefl.gps), 83
 decipher_argt() (in module gnssrefl.decipher_argt), 56
 define_and_xz_snr() (in module gnssrefl.gps), 83
 define_inputfile() (in module gnss-refl.spline_functions), 167
 define_quick_filename() (in module gnssrefl.gps), 83
 diffraction_correction() (in module gnssrefl.gps), 84
 directory (gnssrefl.utils.FileTypes attribute), 182
 download_chmod_move() (in module gnss-refl.installexe_cl), 113
 download_ioc() (in module gnssrefl.download_ioc), 56
 download_noaa() (in module gnssrefl.download_noaa), 57
 download_orbits() (in module gnss-refl.download_orbits), 59
 download_prn_gps() (in module gnssrefl.prn2gps), 132
 download_psmsl() (in module gnss-refl.download_psmsl), 61
 download_rinex() (in module gnss-refl.download_rinex), 61
 download_teqc() (in module gnssrefl.download_teqc), 63
 download_tides() (in module gnss-refl.download_tides), 63
 download_unr() (in module gnssrefl.download_unr), 64
 download_wsv() (in module gnssrefl.download_wsv), 64
 doy2ymd() (in module gnssrefl.gps), 84
- ## E
- e (gnssrefl.gps.wgs84 attribute), 107
 EGM96geoid (class in gnssrefl.EGM96), 49
 elev_angle() (in module gnssrefl.gps), 84
 elev_limits() (in module gnssrefl.nmea2snr), 124
 elev_limits() (in module gnssrefl.rinex2snr), 150
 extract_snr() (in module gnssrefl.rinex2snr), 150
- ## F
- f (gnssrefl.gps.wgs84 attribute), 107
 fbias_daily_avg() (in module gnssrefl.daily_avg), 52
 fdoy2mjd() (in module gnssrefl.gps), 85
 FileManagement (class in gnssrefl.utils), 182
 filename_plus() (in module gnss-refl.karnak_libraries), 116
 FileTypes (class in gnssrefl.utils), 182
 filter_out_snow() (in module gnss-refl.phase_functions), 129
 final_gfz_orbits() (in module gnssrefl.gps), 85
 find_mgnss_satlist() (in module gnssrefl.gnssir_v2), 73
 find_satlist_wdate() (in module gnssrefl.gps), 85
 find_start_stop() (in module gnss-refl.download_ioc), 57
 findConstell() (in module gnssrefl.gps), 85
 fix_angle_azimuth() (in module gnssrefl.nmea2snr), 125
 fL1 (gnssrefl.gps.constants attribute), 82
 fL2 (gnssrefl.gps.constants attribute), 82
 fL5 (gnssrefl.gps.constants attribute), 82
 flipit() (in module gnssrefl.subdaily), 174
 fract_to_obstimes() (in module gnssrefl.subdaily), 174
 freq_out() (in module gnssrefl.gps), 86
 freq_out() (in module gnssrefl.spline_functions), 167
 FresnelZone() (in module gnssrefl.refl_zones), 142
 ftitle() (in module gnssrefl.gps), 86
- ## G
- ga_highrate() (in module gnssrefl.gps), 86
 ga_stuff() (in module gnssrefl.karnak_libraries), 116
 ga_stuff_highrate() (in module gnss-refl.karnak_libraries), 116
 gal_L1 (gnssrefl.gps.constants attribute), 82
 gal_L5 (gnssrefl.gps.constants attribute), 82
 gal_L6 (gnssrefl.gps.constants attribute), 82
 gal_L7 (gnssrefl.gps.constants attribute), 82
 gal_L8 (gnssrefl.gps.constants attribute), 82
 gbm_orbits_direct() (in module gnssrefl.gps), 86
 geoidCorrection() (in module gnssrefl.gps), 87
 get_cddis_navfile() (in module gnssrefl.gps), 87
 get_coords() (in module gnssrefl.make_meta), 121
 get_es_sdk_headers() (in module gnss-refl.make_meta), 121
 get_esa_navfile() (in module gnssrefl.gps), 87
 get_file_path() (gnssrefl.utils.FileManagement method), 182
 get_files() (in module gnssrefl.computemp1mp2), 50
 get_local_rinexfile() (in module gnss-refl.rinex2snr), 150
 get_noaa_obstimes() (in module gnssrefl.gps), 88
 get_noaa_obstimes_plus() (in module gnssrefl.gps), 88
 get_obstimes() (in module gnssrefl.gps), 88
 get_obstimes_plus() (in module gnssrefl.gps), 88
 get_ofac_hifac() (in module gnssrefl.gps), 88
 get_ofac_hifac() (in module gnss-refl.spline_functions), 167
 get_orbits_setexe() (in module gnssrefl.gps), 89

get_sopac_navfile() (in module *gnssrefl.gps*), 89
 get_sopac_navfile_cron() (in module *gnssrefl.gps*), 89
 get_sys() (in module *gnssrefl.utils*), 182
 getMJD() (in module *gnssrefl.gps*), 87
 getnavfile() (in module *gnssrefl.gps*), 89
 getnavfile_archive() (in module *gnssrefl.gps*), 90
 getrinexversion() (in module *gnssrefl.rinpy*), 159
 getseries() (in module *gnssrefl.gps*), 90
 getsp3file() (in module *gnssrefl.gps*), 90
 getsp3file_flex() (in module *gnssrefl.gps*), 90
 getsp3file_mgex() (in module *gnssrefl.gps*), 91
 gfz_version() (in module *gnssrefl.gps*), 91
 glonass_channels() (in module *gnssrefl.gps*), 91
 glonasswlen() (in module *gnssrefl.spline_functions*), 167
 gnssir() (in module *gnssrefl.gnssir_cl*), 65
 gnssir_guts() (in module *gnssrefl.gnssir_old*), 71
 gnssir_guts_v2() (in module *gnssrefl.gnssir_v2*), 73
 gnssrefl
 module, 49
 gnssrefl.check_rinex_file
 module, 49
 gnssrefl.computemplp2
 module, 50
 gnssrefl.daily_avg
 module, 51
 gnssrefl.daily_avg_cl
 module, 54
 gnssrefl.decipher_argt
 module, 56
 gnssrefl.download_ioc
 module, 56
 gnssrefl.download_noaa
 module, 57
 gnssrefl.download_orbits
 module, 59
 gnssrefl.download_psm1
 module, 61
 gnssrefl.download_rinex
 module, 61
 gnssrefl.download_teqc
 module, 63
 gnssrefl.download_tides
 module, 63
 gnssrefl.download_unr
 module, 64
 gnssrefl.download_wsv
 module, 64
 gnssrefl.EGM96
 module, 49
 gnssrefl.filesizes
 module, 65
 gnssrefl.gnssir_cl
 module, 65
 gnssrefl.gnssir_input
 module, 67
 gnssrefl.gnssir_old
 module, 71
 gnssrefl.gnssir_v2
 module, 72
 gnssrefl.gps
 module, 77
 gnssrefl.gpsweek
 module, 111
 gnssrefl.highrate
 module, 111
 gnssrefl.installexe_cl
 module, 113
 gnssrefl.invsnr_cl
 module, 113
 gnssrefl.invsnr_input
 module, 115
 gnssrefl.karnak_libraries
 module, 116
 gnssrefl.kelly
 module, 120
 gnssrefl.llh2xyz
 module, 120
 gnssrefl.make_meta
 module, 121
 gnssrefl.max_resolve_RH_cl
 module, 122
 gnssrefl.mjd
 module, 123
 gnssrefl.nmea2snr
 module, 123
 gnssrefl.nmea2snr_cl
 module, 126
 gnssrefl.nyquist_libs
 module, 127
 gnssrefl.phase_functions
 module, 128
 gnssrefl.pickle_dilemma
 module, 132
 gnssrefl.prn2gps
 module, 132
 gnssrefl.query_unr
 module, 133
 gnssrefl.quicklib
 module, 139
 gnssrefl.quickLook_cl
 module, 133
 gnssrefl.quickLook_function
 module, 134
 gnssrefl.quickLook_function2
 module, 136
 gnssrefl.quickPhase

- module, 138
- gnssrefl.quickplt
 - module, 139
- gnssrefl.read_snr_files
 - module, 140
- gnssrefl.refl_zones
 - module, 142
- gnssrefl.refl_zones_cl
 - module, 145
- gnssrefl.refraction
 - module, 147
- gnssrefl.rh_plot
 - module, 149
- gnssrefl.rinex2snr
 - module, 150
- gnssrefl.rinex2snr_cl
 - module, 155
- gnssrefl.rinex3_rinex2
 - module, 158
- gnssrefl.rinex3_snr
 - module, 159
- gnssrefl.rinex_coords
 - module, 159
- gnssrefl.rinpy
 - module, 159
- gnssrefl.rt_rinex3_snr
 - module, 161
- gnssrefl.smoosh
 - module, 162
- gnssrefl.smoosh_snr
 - module, 162
- gnssrefl.snow_functions
 - module, 163
- gnssrefl.snowdepth_cl
 - module, 165
- gnssrefl.spline_functions
 - module, 166
- gnssrefl.subdaily
 - module, 173
- gnssrefl.subdaily_cl
 - module, 180
- gnssrefl.utils
 - module, 182
- gnssrefl.veg_multiyr
 - module, 182
- gnssrefl.vwc
 - module, 183
- gnssrefl.vwc_cl
 - module, 184
- gnssrefl.vwc_input
 - module, 185
- gnssrefl.xyz2llh
 - module, 186
- gnssrefl.ydoy

- module, 186
- gnssrefl.ymd
 - module, 187
- gnssSNR_version() (in module *gnssrefl.gps*), 91
- go_from_crxgz_to_rnx() (in module *gnssrefl.rinex2snr*), 151
- gogetit() (in module *gnssrefl.karnak_libraries*), 117
- goodbad() (in module *gnssrefl.quickLook_function*), 134
- goodbad() (in module *gnssrefl.quickLook_function2*), 136
- gps2datenum() (in module *gnssrefl.spline_functions*), 168
- gps2datetime() (in module *gnssrefl.spline_functions*), 168
- gpsSNR_version() (in module *gnssrefl.gps*), 91
- gpt2_1w() (in module *gnssrefl.refraction*), 147
- gsi_data() (in module *gnssrefl.karnak_libraries*), 117

H

- hatanaka_version() (in module *gnssrefl.gps*), 92
- hatanaka_warning() (in module *gnssrefl.gps*), 92
- height() (*gnssrefl.EGM96.EGM96geoid method*), 49
- highrate_nz() (in module *gnssrefl.gps*), 92

I

- ign_orbits() (in module *gnssrefl.gps*), 92
- ign_rinex3() (in module *gnssrefl.gps*), 92
- igsnam() (in module *gnssrefl.gps*), 93
- in_winter() (in module *gnssrefl.veg_multiyr*), 182
- inout() (in module *gnssrefl.gps*), 93
- installexe() (in module *gnssrefl.installexe_cl*), 113
- invsnr() (in module *gnssrefl.invsnr_cl*), 113
- invsnr_header() (in module *gnssrefl.spline_functions*), 168
- invsnr_input() (in module *gnssrefl.invsnr_input*), 115
- is_it_legal() (in module *gnssrefl.gps*), 93

J

- just_bkg() (in module *gnssrefl.karnak_libraries*), 117

K

- kgpsweek() (in module *gnssrefl.gps*), 93
- kgpsweekCC() (in module *gnssrefl.gps*), 94
- kristine_dictionary() (in module *gnssrefl.spline_functions*), 168

L

- l2c_l5_list() (in module *gnssrefl.gps*), 94
- l2c_l5_list() (in module *gnssrefl.spline_functions*), 168
- llh2xyz() (in module *gnssrefl.gps*), 94
- load_avg_phase() (in module *gnssrefl.phase_functions*), 129

- load_sat_phase() (in module gnssrefl.phase_functions), 129
- loadrinexfrommpz() (in module gnssrefl.rinpy), 159
- loadsnrfile() (in module gnssrefl.spline_functions), 168
- local_update_plot() (in module gnssrefl.gnssir_old), 71
- local_update_plot() (in module gnssrefl.gnssir_v2), 74
- look_for_pickle_file() (in module gnssrefl.refraction), 148
- low_pct() (in module gnssrefl.phase_functions), 130
- LSPresult_name() (in module gnssrefl.gps), 77
- ## M
- main() (in module gnssrefl.check_rinex_file), 50
- main() (in module gnssrefl.computemp1mp2), 50
- main() (in module gnssrefl.daily_avg_cl), 55
- main() (in module gnssrefl.download_orbits), 60
- main() (in module gnssrefl.download_rinex), 62
- main() (in module gnssrefl.download_teqc), 63
- main() (in module gnssrefl.download_tides), 64
- main() (in module gnssrefl.download_unr), 64
- main() (in module gnssrefl.download_wsv), 64
- main() (in module gnssrefl.filesizes), 65
- main() (in module gnssrefl.gnssir_cl), 67
- main() (in module gnssrefl.gnssir_input), 67
- main() (in module gnssrefl.gpsweek), 111
- main() (in module gnssrefl.installexe_cl), 113
- main() (in module gnssrefl.invsnr_cl), 115
- main() (in module gnssrefl.invsnr_input), 116
- main() (in module gnssrefl.llh2xyz), 120
- main() (in module gnssrefl.make_meta), 121
- main() (in module gnssrefl.max_resolve_RH_cl), 122
- main() (in module gnssrefl.mjd), 123
- main() (in module gnssrefl.nmea2snr_cl), 126
- main() (in module gnssrefl.pickle_dilemma), 132
- main() (in module gnssrefl.prn2gps), 132
- main() (in module gnssrefl.query_unr), 133
- main() (in module gnssrefl.quickLook_cl), 133
- main() (in module gnssrefl.quickPhase), 138
- main() (in module gnssrefl.quickplt), 139
- main() (in module gnssrefl.refl_zones_cl), 145
- main() (in module gnssrefl.rh_plot), 149
- main() (in module gnssrefl.rinex2snr_cl), 155
- main() (in module gnssrefl.rinex3_rinex2), 158
- main() (in module gnssrefl.rinex3_snr), 159
- main() (in module gnssrefl.rinex_coords), 159
- main() (in module gnssrefl.rt_rinex3_snr), 161
- main() (in module gnssrefl.smoosh), 162
- main() (in module gnssrefl.smoosh_snr), 162
- main() (in module gnssrefl.snowdepth_cl), 165
- main() (in module gnssrefl.subdaily_cl), 180
- main() (in module gnssrefl.veg_multiyr), 183
- main() (in module gnssrefl.vwc), 183
- main() (in module gnssrefl.vwc_cl), 184
- main() (in module gnssrefl.vwc_input), 185
- main() (in module gnssrefl.xyz2llh), 186
- main() (in module gnssrefl.ydoy), 186
- main() (in module gnssrefl.ymd), 187
- make_azim_choices() (in module gnssrefl.gps), 94
- make_FZ_kml() (in module gnssrefl.refl_zones), 143
- make_gnssir_input() (in module gnssrefl.gnssir_input), 67
- make_json(gnssrefl.utils.FileTypes attribute), 182
- make_meta() (in module gnssrefl.make_meta), 121
- make_nav_dirs() (in module gnssrefl.gps), 95
- make_rinex2_ofiles() (in module gnssrefl.karnak_libraries), 117
- make_snow_filter() (in module gnssrefl.phase_functions), 130
- make_snrdir() (in module gnssrefl.gps), 95
- make_wavelength_column() (in module gnssrefl.spline_functions), 169
- makeEllipse_latlon() (in module gnssrefl.refl_zones), 143
- makeFresnelEllipse() (in module gnssrefl.refl_zones), 143
- max_resolve_RH() (in module gnssrefl.max_resolve_RH_cl), 122
- mergerinexfiles() (in module gnssrefl.rinpy), 159
- meta_man_input() (in module gnssrefl.make_meta), 122
- mirror_plot() (in module gnssrefl.subdaily), 174
- mjd() (in module gnssrefl.gps), 95
- mjd_more() (in module gnssrefl.gps), 95
- mjd_to_date() (in module gnssrefl.gps), 95
- mjd_to_datetime() (in module gnssrefl.gps), 96
- module
- gnssrefl, 49
 - gnssrefl.check_rinex_file, 49
 - gnssrefl.computemp1mp2, 50
 - gnssrefl.daily_avg, 51
 - gnssrefl.daily_avg_cl, 54
 - gnssrefl.decipher_argt, 56
 - gnssrefl.download_ioc, 56
 - gnssrefl.download_noaa, 57
 - gnssrefl.download_orbits, 59
 - gnssrefl.download_psms1, 61
 - gnssrefl.download_rinex, 61
 - gnssrefl.download_teqc, 63
 - gnssrefl.download_tides, 63
 - gnssrefl.download_unr, 64
 - gnssrefl.download_wsv, 64
 - gnssrefl.EGM96, 49
 - gnssrefl.filesizes, 65
 - gnssrefl.gnssir_cl, 65
 - gnssrefl.gnssir_input, 67

gnssrefl.gnssir_old, 71
 gnssrefl.gnssir_v2, 72
 gnssrefl.gps, 77
 gnssrefl.gpsweek, 111
 gnssrefl.highrate, 111
 gnssrefl.installexe_cl, 113
 gnssrefl.invsnr_cl, 113
 gnssrefl.invsnr_input, 115
 gnssrefl.karnak_libraries, 116
 gnssrefl.kelly, 120
 gnssrefl.llh2xyz, 120
 gnssrefl.make_meta, 121
 gnssrefl.max_resolve_RH_cl, 122
 gnssrefl.mjd, 123
 gnssrefl.nmea2snr, 123
 gnssrefl.nmea2snr_cl, 126
 gnssrefl.nyquist_libs, 127
 gnssrefl.phase_functions, 128
 gnssrefl.pickle_dilemma, 132
 gnssrefl.prn2gps, 132
 gnssrefl.query_unr, 133
 gnssrefl.quicklib, 139
 gnssrefl.quickLook_cl, 133
 gnssrefl.quickLook_function, 134
 gnssrefl.quickLook_function2, 136
 gnssrefl.quickPhase, 138
 gnssrefl.quickplt, 139
 gnssrefl.read_snr_files, 140
 gnssrefl.refl_zones, 142
 gnssrefl.refl_zones_cl, 145
 gnssrefl.refraction, 147
 gnssrefl.rh_plot, 149
 gnssrefl.rinex2snr, 150
 gnssrefl.rinex2snr_cl, 155
 gnssrefl.rinex3_rinex2, 158
 gnssrefl.rinex3_snr, 159
 gnssrefl.rinex_coords, 159
 gnssrefl.rinpy, 159
 gnssrefl.rt_rinex3_snr, 161
 gnssrefl.smoosh, 162
 gnssrefl.smoosh_snr, 162
 gnssrefl.snow_functions, 163
 gnssrefl.snowdepth_cl, 165
 gnssrefl.spline_functions, 166
 gnssrefl.subdaily, 173
 gnssrefl.subdaily_cl, 180
 gnssrefl.utils, 182
 gnssrefl.veg_multiyr, 182
 gnssrefl.vwc, 183
 gnssrefl.vwc_cl, 184
 gnssrefl.vwc_input, 185
 gnssrefl.xyz2llh, 186
 gnssrefl.ydoy, 186
 gnssrefl.ymd, 187

month_converter() (in module gnssrefl.gps), 96
 more_confused_obstimes() (in module gnssrefl.gps),
 96
 mpfile_unavco() (in module gnssrefl.download_teqc),
 63
 mu (gnssrefl.gps.constants attribute), 83
 mu (gnssrefl.rinex2snr.constants attribute), 150
 multimonthdownload() (in module gnss-
 refl.download_noaa), 57
 my_percentile() (in module gnssrefl.subdaily), 174
 myfavoritegpsobs() (in module gnssrefl.gps), 96
 myfavoriteobs() (in module gnssrefl.gps), 96
 myfindephem() (in module gnssrefl.gps), 96
 myreadnav() (in module gnssrefl.gps), 96
 myscan() (in module gnssrefl.gps), 96

N

nav_name() (in module gnssrefl.gps), 97
 navfile_retrieve() (in module gnssrefl.gps), 97
 navorbits() (in module gnssrefl.rinex2snr), 151
 new_azel() (in module gnssrefl.decipher_argt), 56
 new_rinex3_rinex2() (in module gnssrefl.gps), 97
 new_rise_set() (in module gnssrefl.gnssir_v2), 74
 new_rise_set_again() (in module gnssrefl.gnssir_v2),
 75
 newchip_gfzrnz() (in module gnssrefl.installexe_cl),
 113
 newchip_hatanaka() (in module gnss-
 refl.installexe_cl), 113
 newvegplot() (in module gnssrefl.veg_multiyr), 183
 nextdoy() (in module gnssrefl.gps), 97
 nicerTime() (in module gnssrefl.gps), 98
 NMEA2SNR() (in module gnssrefl.nmea2snr), 123
 noaa2me() (in module gnssrefl.download_noaa), 58
 noaa_command() (in module gnssrefl.download_noaa),
 58
 norm() (in module gnssrefl.gps), 98
 normAmp() (in module gnssrefl.phase_functions), 130
 numsats_plot() (in module gnssrefl.subdaily), 175
 ny_plot() (in module gnssrefl.nyquist_libs), 127
 nyquist_simple() (in module gnssrefl.refl_zones), 144

O

omegaEarth (gnssrefl.gps.constants attribute), 83
 omegaEarth (gnssrefl.rinex2snr.constants attribute), 150
 onesat_freq_check() (in module gnssrefl.gnssir_old),
 71
 onesat_freq_check() (in module gnssrefl.gnssir_v2),
 75
 open_outputfile() (in module gnssrefl.gps), 98
 open_plot() (in module gnssrefl.gps), 98
 orbfile_cddis() (in module gnssrefl.gps), 98
 output_names() (in module gnssrefl.subdaily), 175

P

[parse_arguments\(\)](#) (in module `gnssrefl.daily_avg_cl`), 55
[parse_arguments\(\)](#) (in module `gnssrefl.download_orbits`), 60
[parse_arguments\(\)](#) (in module `gnssrefl.download_rinex`), 62
[parse_arguments\(\)](#) (in module `gnssrefl.download_teqc`), 63
[parse_arguments\(\)](#) (in module `gnssrefl.download_tides`), 64
[parse_arguments\(\)](#) (in module `gnssrefl.download_unr`), 64
[parse_arguments\(\)](#) (in module `gnssrefl.download_wsv`), 65
[parse_arguments\(\)](#) (in module `gnssrefl.gnssir_cl`), 67
[parse_arguments\(\)](#) (in module `gnssrefl.gnssir_input`), 70
[parse_arguments\(\)](#) (in module `gnssrefl.installexe_cl`), 113
[parse_arguments\(\)](#) (in module `gnssrefl.invsnr_cl`), 115
[parse_arguments\(\)](#) (in module `gnssrefl.invsnr_input`), 116
[parse_arguments\(\)](#) (in module `gnssrefl.make_meta`), 122
[parse_arguments\(\)](#) (in module `gnssrefl.max_resolve_RH_cl`), 123
[parse_arguments\(\)](#) (in module `gnssrefl.quickLook_cl`), 133
[parse_arguments\(\)](#) (in module `gnssrefl.quickPhase`), 138
[parse_arguments\(\)](#) (in module `gnssrefl.refl_zones_cl`), 145
[parse_arguments\(\)](#) (in module `gnssrefl.rh_plot`), 149
[parse_arguments\(\)](#) (in module `gnssrefl.rinex2snr_cl`), 155
[parse_arguments\(\)](#) (in module `gnssrefl.snowdepth_cl`), 165
[parse_arguments\(\)](#) (in module `gnssrefl.subdaily_cl`), 180
[parse_arguments\(\)](#) (in module `gnssrefl.vwc`), 183
[parse_arguments\(\)](#) (in module `gnssrefl.vwc_cl`), 184
[parse_arguments\(\)](#) (in module `gnssrefl.vwc_input`), 185
[phase_file](#) (`gnssrefl.utils.FileTypes` attribute), 182
[phase_tracks\(\)](#) (in module `gnssrefl.phase_functions`), 130
[pickup_files_nyquist\(\)](#) (in module `gnssrefl.nyquist_libs`), 127
[pickup_from_noaa\(\)](#) (in module `gnssrefl.download_noaa`), 58
[plot2screen\(\)](#) (in module `gnssrefl.gnssir_old`), 72
[plot2screen\(\)](#) (in module `gnssrefl.gnssir_v2`), 75

[plot_tracks\(\)](#) (in module `gnssrefl.spline_functions`), 169
[prevdoy\(\)](#) (in module `gnssrefl.gps`), 99
[print_archives\(\)](#) (in module `gnssrefl.rinex2snr`), 151
[print_badpoints\(\)](#) (in module `gnssrefl.subdaily`), 175
[print_file_stats\(\)](#) (in module `gnssrefl.gps`), 99
[processrinexfile\(\)](#) (in module `gnssrefl.rinpy`), 160
[propagate\(\)](#) (in module `gnssrefl.gps`), 99

Q

[queryUNR_modern\(\)](#) (in module `gnssrefl.gps`), 99
[quick_plot\(\)](#) (in module `gnssrefl.gps`), 99
[quick_raw\(\)](#) (in module `gnssrefl.daily_avg`), 52
[quickazel\(\)](#) (in module `gnssrefl.gps`), 99
[quicklook\(\)](#) (in module `gnssrefl.quickLook_cl`), 133
[quickLook_function\(\)](#) (in module `gnssrefl.quickLook_function`), 135
[quickLook_function\(\)](#) (in module `gnssrefl.quickLook_function2`), 137
[quickname\(\)](#) (in module `gnssrefl.nmea2snr`), 125
[quickname\(\)](#) (in module `gnssrefl.rinex2snr`), 152
[quickp\(\)](#) (in module `gnssrefl.gps`), 99
[quickphase\(\)](#) (in module `gnssrefl.quickPhase`), 138
[quickTr\(\)](#) (in module `gnssrefl.subdaily`), 175

R

[rapid_gfz_orbits\(\)](#) (in module `gnssrefl.gps`), 100
[read_4by5\(\)](#) (in module `gnssrefl.refraction`), 148
[read_apriori_rh\(\)](#) (in module `gnssrefl.phase_functions`), 131
[read_file\(\)](#) (`gnssrefl.utils.FileManagement` method), 182
[read_files\(\)](#) (in module `gnssrefl.gps`), 100
[read_files_in_dir\(\)](#) (in module `gnssrefl.utils`), 182
[read_jpl_file\(\)](#) (in module `gnssrefl.prn2gps`), 132
[read_json_file\(\)](#) (in module `gnssrefl.gnssir_old`), 72
[read_json_file\(\)](#) (in module `gnssrefl.gnssir_v2`), 75
[read_leapsecond_file\(\)](#) (in module `gnssrefl.gps`), 100
[read_nmea\(\)](#) (in module `gnssrefl.nmea2snr`), 125
[read_one_snr\(\)](#) (in module `gnssrefl.read_snr_files`), 140
[read_simon_williams\(\)](#) (in module `gnssrefl.gps`), 100
[read_snr\(\)](#) (in module `gnssrefl.gnssir_v2`), 76
[read_snr_multiday\(\)](#) (in module `gnssrefl.read_snr_files`), 141
[read_snr_simple\(\)](#) (in module `gnssrefl.quickLook_function`), 135
[read_sp3\(\)](#) (in module `gnssrefl.gps`), 101
[read_sp3file\(\)](#) (in module `gnssrefl.gps`), 101
[read_the_orbits\(\)](#) (in module `gnssrefl.nyquist_libs`), 128
[readheader\(\)](#) (in module `gnssrefl.rinpy`), 161
[readin_and_plot\(\)](#) (in module `gnssrefl.subdaily`), 176

readin_plot_daily() (in module *gnssrefl.daily_avg*), 52
 readklsnrtxt() (in module *gnssrefl.spline_functions*), 169
 readoutmp() (in module *gnssrefl.computemp1mp2*), 50
 ReadRecAnt() (in module *gnssrefl.computemp1mp2*), 50
 readSNRval() (in module *gnssrefl.rinex2snr*), 152
 readWrite_gpt2_1w() (in module *gnssrefl.refraction*), 148
 reflzones() (in module *gnssrefl.refl_zones_cl*), 145
 refrc_Rueger() (in module *gnssrefl.refraction*), 148
 removeDC() (in module *gnssrefl.gps*), 101
 residuals_cubspl_js() (in module *gnssrefl.spline_functions*), 169
 residuals_cubspl_spectral() (in module *gnssrefl.spline_functions*), 170
 result_directories() (in module *gnssrefl.gps*), 101
 rewrite_azel() (in module *gnssrefl.gnssir_v2*), 76
 rewrite_tseries() (in module *gnssrefl.gps*), 102
 rewrite_tseries_igs() (in module *gnssrefl.gps*), 102
 rewrite_tseries_wrapids() (in module *gnssrefl.gps*), 102
 rewrite_UNR_highrate() (in module *gnssrefl.gps*), 102
 rh_plot() (in module *gnssrefl.rh_plot*), 149
 rh_plots() (in module *gnssrefl.subdaily*), 177
 rhdot_correction2() (in module *gnssrefl.subdaily*), 177
 rhdot_plots() (in module *gnssrefl.subdaily*), 177
 rinex2_highrate() (in module *gnssrefl.karnak_libraries*), 118
 rinex2names() (in module *gnssrefl.karnak_libraries*), 118
 rinex2snr() (in module *gnssrefl.rinex2snr_cl*), 155
 rinex3_nav() (in module *gnssrefl.gps*), 102
 rinex_ga_highrate() (in module *gnssrefl.gps*), 102
 rinex_jp() (in module *gnssrefl.gps*), 102
 rinex_name() (in module *gnssrefl.gps*), 102
 rinex_nrcan_highrate() (in module *gnssrefl.gps*), 103
 rinex_unavco() (in module *gnssrefl.gps*), 103
 rinex_unavco_highrate() (in module *gnssrefl.gps*), 103
 RinexError, 159
 rising_setting_new() (in module *gnssrefl.refl_zones*), 144
 rnx2snr() (in module *gnssrefl.rinex2snr*), 152
 rot3() (in module *gnssrefl.gps*), 103
 run_nmea2snr() (in module *gnssrefl.nmea2snr*), 125
 run_rinex2snr() (in module *gnssrefl.rinex2snr*), 152
 run_teqc() (in module *gnssrefl.computemp1mp2*), 50

S
 satfreq2waveL() (in module *gnssrefl.spline_functions*), 170
 satorb() (in module *gnssrefl.rinex2snr*), 153
 satorb_prop() (in module *gnssrefl.rinex2snr*), 154
 satorb_prop_sp3() (in module *gnssrefl.rinex2snr*), 154
 save_lsp_results() (in module *gnssrefl.spline_functions*), 170
 save_plot() (in module *gnssrefl.gps*), 103
 save_reflzone_orbits() (in module *gnssrefl.refl_zones*), 144
 saverinextonpz() (in module *gnssrefl.rinpy*), 161
 separateobservables() (in module *gnssrefl.rinpy*), 161
 serial_cddis_files() (in module *gnssrefl.karnak_libraries*), 118
 set_azlist_multi_regions() (in module *gnssrefl.refl_zones*), 144
 set_environment() (in module *gnssrefl.utils*), 182
 set_final_azlist() (in module *gnssrefl.refl_zones*), 145
 set_labels() (in module *gnssrefl.quickLook_function2*), 137
 set_refraction_model() (in module *gnssrefl.spline_functions*), 170
 set_refraction_params() (in module *gnssrefl.gnssir_old*), 72
 set_refraction_params() (in module *gnssrefl.gnssir_v2*), 76
 set_subdir() (in module *gnssrefl.gps*), 104
 set_system() (in module *gnssrefl.refl_zones*), 145
 sfilename() (in module *gnssrefl.computemp1mp2*), 51
 signal2list() (in module *gnssrefl.spline_functions*), 171
 simpleLSP() (in module *gnssrefl.spline_functions*), 171
 smarterWay() (in module *gnssrefl.spline_functions*), 171
 snow_azimuthal() (in module *gnssrefl.snow_functions*), 163
 snow_simple() (in module *gnssrefl.snow_functions*), 163
 snowdepth() (in module *gnssrefl.snowdepth_cl*), 165
 snowplot() (in module *gnssrefl.snow_functions*), 164
 snr2arcs() (in module *gnssrefl.spline_functions*), 171
 snr2spline() (in module *gnssrefl.spline_functions*), 172
 snr_exist() (in module *gnssrefl.gps*), 104
 snr_name() (in module *gnssrefl.gps*), 104
 sp3_name() (in module *gnssrefl.gps*), 104
 spline_in_out() (in module *gnssrefl.subdaily*), 178
 stack_two_more() (in module *gnssrefl.subdaily*), 178
 store_orbitfile() (in module *gnssrefl.gps*), 105
 store_snrfile() (in module *gnssrefl.gps*), 105
 str2bool() (in module *gnssrefl.utils*), 182
 strip_compute() (in module *gnssrefl.gps*), 105

- strip_rinexfile() (in module gnssrefl.karnak_libraries), 118
- subdaily() (in module gnssrefl.subdaily_cl), 180
- swapRS() (in module gnssrefl.karnak_libraries), 118
- ## T
- teqc_version() (in module gnssrefl.gps), 105
- test_func() (in module gnssrefl.phase_functions), 131
- test_func_new() (in module gnssrefl.phase_functions), 131
- testing_nvals() (in module gnssrefl.subdaily), 178
- the_kelly_simple_way() (in module gnssrefl.kelly), 120
- the_makan_option() (in module gnssrefl.rinex2snr), 154
- time_limits() (in module gnssrefl.snow_functions), 164
- trans_time() (in module gnssrefl.quicklib), 139
- translate_dates() (in module gnssrefl.gps), 106
- two_stacked_plots() (in module gnssrefl.subdaily), 179
- ## U
- Ulich_Bending_Angle() (in module gnssrefl.refraction), 147
- ultra_gfz_orbits() (in module gnssrefl.gps), 106
- universal() (in module gnssrefl.karnak_libraries), 119
- universal_all() (in module gnssrefl.karnak_libraries), 119
- universal_rinex2() (in module gnssrefl.karnak_libraries), 119
- UNR_highrate() (in module gnssrefl.gps), 78
- up() (in module gnssrefl.gps), 106
- update_plot() (in module gnssrefl.gps), 106
- update_quick_plot() (in module gnssrefl.gps), 106
- ## V
- validate_input_datatypes() (in module gnssrefl.utils), 182
- variableArchives() (in module gnssrefl.highrate), 112
- vegoutfile() (in module gnssrefl.veg_multiyr), 183
- vegplt() (in module gnssrefl.computemp1mp2), 51
- volumetric_water_content (gnssrefl.utils.FileTypes attribute), 182
- vwc() (in module gnssrefl.vwc), 183
- vwc() (in module gnssrefl.vwc_cl), 184
- vwc_input() (in module gnssrefl.vwc_input), 185
- vwc_plot() (in module gnssrefl.phase_functions), 131
- ## W
- warn_and_exit() (in module gnssrefl.gps), 107
- wbL2 (gnssrefl.gps.constants attribute), 83
- wbL5 (gnssrefl.gps.constants attribute), 83
- wbL6 (gnssrefl.gps.constants attribute), 83
- wbL7 (gnssrefl.gps.constants attribute), 83
- wgL1 (gnssrefl.gps.constants attribute), 83
- wgL5 (gnssrefl.gps.constants attribute), 83
- wgL6 (gnssrefl.gps.constants attribute), 83
- wgL7 (gnssrefl.gps.constants attribute), 83
- wgL8 (gnssrefl.gps.constants attribute), 83
- wgs84 (class in gnssrefl.gps), 107
- whichquad() (in module gnssrefl.quickLook_function2), 138
- window_data() (in module gnssrefl.gps), 107
- window_new() (in module gnssrefl.gnssir_v2), 76
- wL1 (gnssrefl.gps.constants attribute), 83
- wL2 (gnssrefl.gps.constants attribute), 83
- wL5 (gnssrefl.gps.constants attribute), 83
- write_avg_phase() (in module gnssrefl.phase_functions), 132
- write_coords() (in module gnssrefl.refl_zones), 145
- write_out_all() (in module gnssrefl.daily_avg), 53
- write_out_data() (in module gnssrefl.download_noaa), 59
- write_out_header() (in module gnssrefl.subdaily), 179
- write_out_RH_file() (in module gnssrefl.daily_avg), 53
- write_QC_fails() (in module gnssrefl.gps), 108
- write_subdaily() (in module gnssrefl.subdaily), 179
- writejsonfile() (in module gnssrefl.subdaily), 179
- writeout_azim() (in module gnssrefl.snow_functions), 164
- writeout_snowdepth_v0() (in module gnssrefl.snow_functions), 165
- writeout_spline_outliers() (in module gnssrefl.subdaily), 179
- ## X
- xyz211h() (in module gnssrefl.gps), 108
- xyz211hd() (in module gnssrefl.gps), 109
- ## Y
- yday2useful() (in module gnssrefl.gps), 109
- yday2ymd() (in module gnssrefl.gps), 109
- ydoych() (in module gnssrefl.gps), 109
- ymd2ch() (in module gnssrefl.gps), 109
- ymd2doy() (in module gnssrefl.gps), 110
- ymd_hhmmss() (in module gnssrefl.gps), 110
- ## Z
- zenithdelay() (in module gnssrefl.gps), 111